Dry-installed Volute Casing Pump

Sewatec / Sewabloc

60 Hz
ASME / NEMA Motors

General Arrangement Drawings

Sewatec

Sewabloc

Legal information/Copyright

General Arrangement Drawings Sewatec / Sewabloc

All rights reserved. The contents provided herein must neither be distributed, copied, reproduced, edited or processed for any other purpose, nor otherwise transmitted, published or made available to a third party without the manufacturer's express written consent.

Subject to technical modification without prior notice.

© KSB SE & Co. KGaA, Frankenthal 2024-08-22

Contents

Waste Water **4**
Dry-installed Volute Casing Pumps 4
Sewatec / Sewabloc 4
Designation 4
Installation types per bearing bracket and impeller type 5
General arrangement drawings 12
General arrangement drawing Sewatec Figure 0 (bare-shaft pump) 12
General arrangement drawing Sewatec 3EN (E1, E2) 13
General arrangement drawing Sewatec 3EN (E2, E3) 14
General arrangement drawing Sewatec 3ENH (E1, E2) 15
General arrangement drawing Sewatec 3ENH (E2, E3) 16
General arrangement drawing Sewatec V, on suction elbow 17
General arrangement drawing Sewatec V, on concrete base 18
General arrangement drawing Sewatec VU 19
General arrangement drawing Sewatec VGW, with universal-joint shaft 20
General arrangement drawing Sewabloc BLOC 21
General arrangement drawing Sewabloc BLOC-VF 22
Dimensions and weights 23
Symbols key 23
Installation type Figure 0 24
Installation type 3EN 29
Installation type 3ENH 49
Installation type V 69
Installation type V: Soleplate and foundation / foundation rails 72
Installation type VU 77
Installation type VU: Soleplate and foundation / foundation rails 85
Installation type VGW 93
Installation type VGW: Soleplate and foundation / foundation rails 105
Installation type BLOC 118
Installation type BLOC-VF 124
Baseplates 130
Foundation rails 131
Motor sizes 132
Connections 133

Waste Water

Dry-installed Volute Casing Pumps

Sewatec / Sewabloc

Sewatec Sewabloc

Designation

Example: Sewatec F100-251GV

Table 1: Designation key

Code	Description	
Sewatec	Type series	
	Sewatec	
	Sewabloc	
F	Impeller type	
	F/F-max	Vortex impeller
	E/E-max	Closed single-channel impeller
	D/D-max	Open diagonal single-vane impeller / open radial multi-vane impeller
	K/K-max	Closed multi-channel impeller
100	Nominal discharge nozzle diameter [mm]	
251	Nominal impeller diameter [mm]	
G	Material variant	
	G	Standard variant, wetted components made of gray cast iron
	G1	Like G, impeller made of duplex stainless steel
	G2	Like G, impeller made of white cast iron
	GH	Like G, impeller and intermediate casing made of white cast iron
	GC	Like G, impeller and discharge cover made of duplex stainless steel
V	Installation type	
	Sewabloc	BLOC
		BLOC-VF
	Sewatec R	Fig.0
		3EN
		3ENH
		V
		VU
		VGW

2580.36/05-EN-US

Installation types per bearing bracket and impeller type

Table 2: Installation types per bearing bracket and impeller type

Size	Bearing bracket	Impeller type	Installation types							
			Sewabloc	Sewabloc-vertical	Sewatec			Sewatec-vertical		
								a)[1]  b)[2] 	a)[3]  b)[4] 	
			BLOC	BLOC-VF	Fig. 0	3E-N	3E-NH	V	VU	VGW[5]
050-215	B01	F	✗	✗	-	-	-	-	-	-
050-215	S01	F	-	-	✗	✗	✗	✗	-	-
050-216	B01	F	✗	✗	-	-	-	-	-	-
050-216	S01	F	-	-	✗	✗	✗	✗	-	-
050-250	B01	K	✗	✗	-	-	-	-	-	-
050-250	S01	K	-	-	✗	✗	✗	✗	-	-
050-251	B02	K	✗	✗	-	-	-	-	-	-
050-251	S02	K	-	-	✗	✗	✗	✗	-	-
065-215	B01	F	✗	✗	-	-	-	-	-	-
065-215	S01	F	-	-	✗	✗	✗	✗	-	-
065-216	B02	E	✗	✗	-	-	-	-	-	-
065-216	S02	E	-	-	✗	✗	✗	✗	-	-
065-217	B01	F	✗	✗	-	-	-	-	-	-
065-217	S01	F	-	-	✗	✗	✗	✗	-	-
065-250	B01	K	✗	✗	-	-	-	-	-	-
065-250	S01	K	-	-	✗	✗	✗	✗	-	-
080-215	B01	F	✗	✗	-	-	-	-	-	-
080-215	S01	F	-	-	✗	✗	✗	✗	-	-
080-216	B01	F	✗	✗	-	-	-	-	-	-
080-216	B02	E	✗	✗	-	-	-	-	-	-
080-216	S01	F	-	-	✗	✗	✗	✗	-	-
080-216	S02	E	-	-	✗	✗	✗	✗	-	-
080-217	B01	F	✗	✗	-	-	-	-	-	-
080-217	S01	F	-	-	✗	✗	✗	✗	-	-
080-250	B01	K	✗	✗	-	-	-	-	-	-
080-250	S01	K	-	-	✗	✗	✗	✗	-	-
080-252	B01	F	✗	✗	-	-	-	-	-	-
080-252	S01	F	-	-	✗	✗	✗	✗	-	-
080-253	B02	F	✗	✗	-	-	-	-	-	-
080-253	B02	E	✗	✗	-	-	-	-	-	-
080-253	S02	F	-	-	✗	✗	✗	✗	-	-
080-253	S02	E	-	-	✗	✗	✗	✗	-	-

1 Pump set on suction elbow
2 Pump set on concrete base
3 Pump set, C-face configuration, with motor pedestal, drive lantern, coupling, coupling guard and suction elbow
4 Pump set with soleplate, drive lantern, coupling, coupling guard and suction elbow
5 Version with universal-joint shaft only upon quotation approval

Size	Bearing bracket	Impeller type	Installation types							
			Sewabloc	Sewabloc-vertical	Sewatec			Sewatec-vertical		
								a)[1]  b)[2] 	a)[3]  b)[4] 	
			BLOC	BLOC-VF	Fig. 0	3E-N	3E-NH	V	VU	VGW[5]
080-315	B03	D	✗	✗	-	-	-	-	-	-
080-317	S03	F	-	✗	✗	✗	✗	-	-	-
080-315	B03	K	✗	✗	-	-	-	-	-	-
080-315	S03	D	-	-	✗	✗	✗	✗	-	-
080-315	S03	F	-	-	-	-	-	-	-	-
080-315	S03	K	-	-	✗	✗	✗	✗	-	-
080-315	S05	D	-	-	✗	✗	✗	-	-	-
080-316	B03	D	✗	✗	-	-	-	-	-	-
080-316	S03	D	-	-	✗	✗	✗	✗	-	-
080-317	S03	D	-	-	✗	✗	✗	✗	-	-
080-317	B03	D	✗	✗	-	-	-	-	-	-
100-215	B01	F	✗	✗	-	-	-	-	-	-
100-215	S01	F	-	-	✗	✗	✗	✗	-	-
100-250	B01	E	-	-	-	-	-	-	-	-
100-250	B01	K	-	-	-	-	-	-	-	-
100-250	S01	E	-	-	✗	✗	✗	✗	-	-
100-250	S01	K	-	-	-	-	-	-	-	-
100-251	B02	F	✗	✗	-	-	-	-	-	-
100-251	S02	F	-	-	✗	✗	✗	✗	-	-
100-252	B01	F	✗	✗	-	-	-	-	-	-
100-252	S01	F	-	-	✗	✗	✗	✗	-	-
100-253	B02	F	✗	✗	-	-	-	-	-	-
100-253	B02	K	✗	✗	-	-	-	-	-	-
100-253	B02	D	✗	✗	-	-	-	-	-	-
100-253	S02	F	-	-	✗	✗	✗	✗	-	-
100-253	S02	D	-	-	✗	✗	✗	✗	-	-
100-253	S02	E	-	-	✗	✗	✗	✗	-	-
100-253	S02	K	-	-	✗	✗	✗	✗	-	-
100-254	B01	F	✗	✗	-	-	-	-	-	-
100-254	B01	K	-	-	-	-	-	-	-	-
100-254	S01	F	-	-	✗	✗	✗	✗	-	-
100-254	S01	K	-	-	-	-	-	-	-	-
100-255	S02	E	-	-	-	-	-	-	-	-
100-315	S05	D	-	-	✗	✗	✗	✗	-	-
100-316	B03	D	✗	✗	-	-	-	-	-	-
100-316	S03	D	-	-	✗	✗	✗	✗	-	-
100-316	S03	K	-	-	✗	✗	✗	-	-	-
100-316	S03	F	-	-	✗	✗	✗	-	-	-
100-317	S03	E	-	-	✗	✗	✗	✗	-	-
100-400	S04	K	-	-	✗	✗	✗	-	-	-

2580.36/05-EN-US

Size	Bearing bracket	Impeller type	Installation types							
			Sewabloc	Sewabloc-vertical	Sewatec			Sewatec-vertical		
								a)[1]  b)[2] 	a)[3]  b)[4] 	
			BLOC	BLOC-VF	Fig. 0	3E-N	3E-NH	V	VU	VGW[5]
100-400	S05	K	-	-	✗	✗	✗	✗	✗	✗
100-401	S04	E	-	-	-	-	-	-	-	-
100-401	S04	F	-	-	✗	✗	✗	-	-	-
100-401	S04	K	-	-	✗	✗	✗	-	-	-
100-401	S05	E	-	-	-	-	-	-	-	-
100-401	S05	F	-	-	✗	✗	✗	✗	✗	✗
100-401	S05	K	-	-	✗	✗	✗	✗	✗	✗
100-403	S04	D	-	-	✗	✗	✗	-	-	-
100-403	S05	D	-	-	✗	✗	✗	✗	✗	✗
125-315	S03	F	-	-	-	-	-	-	-	-
125-315	S03	K	-	-	-	-	-	-	-	-
125-317	S03	E	-	-	-	-	-	-	-	-
150-253	B02	D	✗	✗	-	-	-	-	-	-
150-253	S02	D	-	-	✗	✗	✗	✗	-	-
150-315	B03	D	✗	✗	-	-	-	-	-	-
150-315	B03	E	-	-	-	-	-	-	-	-
150-315	B03	F	✗	✗	-	-	-	-	-	-
150-315	B03	K	✗	✗	-	-	-	-	-	-
150-315	S03	D	-	-	✗	✗	✗	✗	-	-
150-315	S03	E	-	-	✗	✗	✗	✗	-	-
150-315	S03	F	-	-	✗	✗	✗	✗	-	-
150-315	S03	K	-	-	-	-	-	-	-	-
150-317	B03	D	-	-	✗	✗	✗	✗	-	-
150-317	B03	K	✗	✗	-	-	-	-	-	-
150-317	S03	D	✗	✗	-	-	-	-	-	-
150-317	S03	E	-	-	✗	✗	✗	✗	-	-
150-317	S03	K	-	-	✗	✗	✗	✗	-	-
150-317	S05	K	-	-	✗	✗	✗	-	-	-
150-400	S04	K	-	-	✗	✗	✗	-	-	-
150-400	S05	K	-	-	✗	✗	✗	✗	✗	✗
150-400	S05	D	-	-	✗	✗	✗	✗	✗	✗
150-401	S04	E	-	-	-	-	-	-	-	-
150-401	S04	F	-	-	✗	✗	✗	-	-	-
150-401	S04	K	-	-	-	-	-	-	-	-
150-401	S05	D	-	-	✗	✗	✗	✗	✗	✗
150-401	S05	E	-	-	-	-	-	-	-	-
150-401	S05	F	-	-	✗	✗	✗	✗	✗	✗
150-401	S05	K	-	-	-	-	-	-	-	-
150-401	S06	D	-	-	✗	✗	✗	✗	-	✗
150-401	S06	E	-	-	-	-	-	-	-	-
150-403	S04	K	-	-	✗	✗	✗	-	-	-

Size	Bearing bracket	Impeller type	Installation types							
			Sewabloc	Sewabloc-vertical	Sewatec			Sewatec-vertical		
								a)[1]  b)[2] 	a)[3]  b)[4] 	
			BLOC	BLOC-VF	Fig. 0	3E-N	3E-NH	V	VU	VGW[5]
150-403	S05	K	-	-	✗	✗	✗	✗	✗	✗
150-403	S04	D	-	-	✗	✗	✗	-	-	-
150-403	S05	D	-	-	✗	✗	✗	✗	✗	✗
150-503	S06	D	-	-	✗	✗	✗	✗	✗	✗
150-503	S06	K	-	-	✗	✗	✗	✗	✗	✗
150-503	S07	D	-	-	✗	✗	✗	✗	✗	✗
150-503	S07	K	-	-	✗	✗	✗	✗	✗	✗
151-401	S05	K	-	-	-	-	-	-	-	-
151-403	S04	K	-	-	✗	✗	✗	-	-	-
151-403	S05	K	-	-	✗	✗	✗	✗	✗	✗
200-315	B03	D	✗	✗	-	-	-	-	-	-
200-315	B03	K	✗	✗	-	-	-	-	-	-
200-315	S03	D	-	-	✗	✗	✗	✗	-	-
200-315	S03	K	-	-	✗	✗	✗	✗	-	-
200-316	B03	K	✗	✗	-	-	-	-	-	-
200-316	S03	K	-	-	✗	✗	✗	✗	-	-
200-317	B03	K	✗	✗	-	-	-	-	-	-
200-317	S03	K	-	-	✗	✗	✗	✗	-	-
200-317	S05	K	-	-	✗	✗	✗	-	-	-
200-318	B03	K	✗	✗	-	-	-	-	-	-
200-318	S03	K	-	-	✗	✗	✗	✗	-	-
200-330	S04	K	-	-	-	-	-	-	-	-
200-330	S05	K	-	-	-	-	-	-	-	-
200-400	S05	D	-	-	✗	✗	✗	✗	✗	✗
200-400	S06	D	-	-	✗	✗	✗	✗	✗	✗
200-401	S04	E	-	-	-	-	-	-	-	-
200-401	S04	K	-	-	-	-	-	-	-	-
200-401	S05	E	-	-	-	-	-	-	-	-
200-401	S05	K	-	-	-	-	-	-	-	-
200-401	S06	E	-	-	-	-	-	-	-	-
200-402	S04	K	-	-	✗	✗	✗	-	-	-
200-402	S05	K	-	-	✗	✗	✗	✗	✗	✗
200-402	S06	K	-	-	✗	✗	✗	✗	✗	✗
200-402	S04	D	-	-	✗	✗	✗	-	-	-
200-402	S05	D	-	-	✗	✗	✗	✗	✗	✗
200-402	S06	D	-	-	✗	✗	✗	✗	✗	✗
200-403	S04	K	-	-	✗	✗	✗	-	-	-
200-403	S05	K	-	-	✗	✗	✗	✗	✗	✗
200-403	S06	K	-	-	✗	✗	✗	✗	✗	✗
200-405	S04	D	-	-	✗	✗	✗	-	-	-
200-405	S05	D	-	-	✗	✗	✗	✗	✗	✗

2580.36/05-EN-US

Size	Bearing bracket	Impeller type	Installation types							
			Sewabloc	Sewabloc-vertical	Sewatec			Sewatec-vertical		
								a)[1]  b)[2] 	a)[3]  b)[4] 	
			BLOC	BLOC-VF	Fig. 0	3E-N	3E-NH	V	VU	VGW[5]
200-405	S06	D	-	-	✗	✗	✗	✗	✗	✗
200-500	S05	E	-	-	-	-	-	-	-	-
200-501	S06	K	-	-	-	-	-	-	-	-
200-503	S06	D	-	-	✗	✗	✗	✗	✗	✗
200-503	S07	D	-	-	✗	✗	✗	✗	✗	✗
200-504	S06	K	-	-	✗	✗	✗	✗	✗	✗
200-504	S07	K	-	-	✗	✗	✗	✗	✗	✗
200-505	S06	K	-	-	✗	✗	✗	✗	✗	✗
200-505	S07	K	-	-	✗	✗	✗	✗	✗	✗
200-631	S08	K	-	-	-	-	-	-	-	-
250-400	S04	K	-	-	-	-	-	-	-	-
250-400	S05	D	-	-	✗	✗	✗	✗	✗	✗
250-400	S05	K	-	-	-	-	-	-	-	-
250-400	S06	D	-	-	✗	✗	✗	✗	✗	✗
250-401	S04	K	-	-	✗	✗	✗	-	-	-
250-401	S05	K	-	-	✗	✗	✗	✗	✗	✗
250-401	S06	K	-	-	✗	✗	✗	✗	✗	✗
250-402	S04	D	-	-	✗	✗	✗	-	-	-
250-402	S05	D	-	-	✗	✗	✗	✗	✗	✗
250-402	S06	D	-	-	✗	✗	✗	✗	✗	✗
250-403	S04	K	-	-	✗	✗	✗	-	-	-
250-403	S05	K	-	-	✗	✗	✗	✗	✗	✗
250-403	S06	K	-	-	✗	✗	✗	✗	✗	✗
250-500	S06	E	-	-	-	-	-	-	-	-
250-500	S07	E	-	-	-	-	-	-	-	-
250-630	S07	E	-	-	-	-	-	-	-	-
250-630	S07	K	-	-	-	-	-	-	-	-
250-630	S08	E	-	-	-	-	-	-	-	-
250-630	S08	K	-	-	-	-	-	-	-	-
250-632	S07	K	-	-	✗	✗	✗	✗	✗	✗
250-632	S08	K	-	-	✗	✗	✗	✗	✗	✗
250-900	S09	K	-	-	✗	✗	✗	✗	-	✗
300-400	S04	K	-	-	✗	✗	✗	-	-	-
300-400	S05	D	-	-	✗	✗	✗	✗	✗	✗
300-400	S05	K	-	-	✗	✗	✗	✗	✗	✗
300-400	S06	D	-	-	✗	✗	✗	✗	✗	✗
300-401	S04	K	-	-	✗	✗	✗	-	-	-
300-401	S05	K	-	-	✗	✗	✗	✗	✗	✗
300-402	S04	D	-	-	✗	✗	✗	-	-	-
300-402	S05	D	-	-	✗	✗	✗	✗	✗	✗

Size	Bearing bracket	Impeller type	Installation types							
			Sewabloc	Sewabloc-vertical	Sewatec			Sewatec-vertical		
								a)[1]  b)[2] 	a)[3]  b)[4] 	
			BLOC	BLOC-VF	Fig. 0	3E-N	3E-NH	V	VU	VGW[5]
300-402	S06	D	-	-	✗	✗	✗	✗	✗	✗
300-403	S05	K	-	-	✗	✗	✗	✗	✗	✗
300-500	S06	K	-	-	✗	✗	✗	-	-	-
300-500	S07	K	-	-	✗	✗	✗	✗	✗	✗
300-502	S06	D	-	-	✗	✗	✗	✗	✗	✗
300-502	S07	D	-	-	✗	✗	✗	✗	✗	✗
300-505	S06	D	-	-	✗	✗	✗	✗	✗	✗
300-505	S06	K	-	-	✗	✗	✗	✗	✗	✗
300-505	S07	D	-	-	✗	✗	✗	✗	✗	✗
300-505	S07	K	-	-	✗	✗	✗	✗	✗	✗
300-630	S07	E	-	-	-	-	-	-	-	-
300-630	S08	E	-	-	-	-	-	-	-	-
350-500	S06	K	-	-	✗	✗	✗	-	-	-
350-500	S07	K	-	-	✗	✗	✗	✗	✗	✗
350-501	S06	K	-	-	-	-	-	-	-	-
350-501	S07	K	-	-	-	-	-	-	-	-
350-502	S06	D	-	-	✗	✗	✗	✗	✗	✗
350-502	S07	D	-	-	✗	✗	✗	✗	✗	✗
350-503	S06	D	-	-	✗	✗	✗	✗	✗	✗
350-503	S06	K	-	-	✗	✗	✗	✗	✗	✗
350-503	S07	D	-	-	✗	✗	✗	✗	✗	✗
350-503	S07	K	-	-	✗	✗	✗	✗	✗	✗
350-632	S07	K	-	-	✗	✗	✗	✗	✗	✗
350-632	S08	K	-	-	✗	✗	✗	✗	✗	✗
350-633	S07	K	-	-	✗	✗	✗	✗	✗	✗
350-633	S08	K	-	-	✗	✗	✗	✗	✗	✗
350-710	S07	E	-	-	-	-	-	-	-	-
350-710	S08	E	-	-	-	-	-	-	-	-
350-710	S08	K	-	-	✗	✗	✗	✗	-	✗
350-713	S09	K	-	-	✗	✗	✗	✗	-	✗
400-500	S06	K	-	-	✗	✗	✗	✗	-	✗
400-500	S07	K	-	-	✗	✗	✗	✗	-	✗
400-632	S08	K	-	-	✗	✗	✗	✗	✗	✗
400-710	S09	K	-	-	✗	✗	✗	✗	-	✗
400-713	S09	K	-	-	✗	✗	✗	✗	-	✗
400-900	S09	K	-	-	✗	✗	✗	✗	-	✗
500-632	S08	K	-	-	-	-	-	-	-	-
500-634	S07	K	-	-	✗	✗	✗	✗	✗	✗
500-634	S08	K	-	-	✗	✗	✗	✗	✗	✗
500-710	S09	K	-	-	✗	✗	✗	✗	-	✗

2580.36/05-EN-US

Size	Bearing bracket	Impeller type	Installation types							
			Sewabloc	Sewabloc-vertical	Sewatec			Sewatec-vertical		
								a)[1]  b)[2] 	a)[3]  b)[4] 	
			BLOC	BLOC-VF	Fig. 0	3E-N	3E-NH	V	VU	VGW[5]
500-900	S09	K	-	-	✘	✘	✘	✘	-	✘
500-900	S10	K	-	-	✘	✘	✘	✘	-	✘
600-520	S07	K	-	-	✘	✘	✘	✘	-	✘
600-710	S08	K	-	-	✘	✘	✘	✘	-	✘
600-900	S10	K	-	-	✘	✘	✘	✘	-	✘
700-902	S08	K	-	-	✘	✘	✘	✘	✘	✘
700-902	S09	K	-	-	✘	✘	✘	✘	-	✘

2580.36/05-EN-US

General arrangement drawings

General arrangement drawing Sewatec Figure 0 (bare-shaft pump)

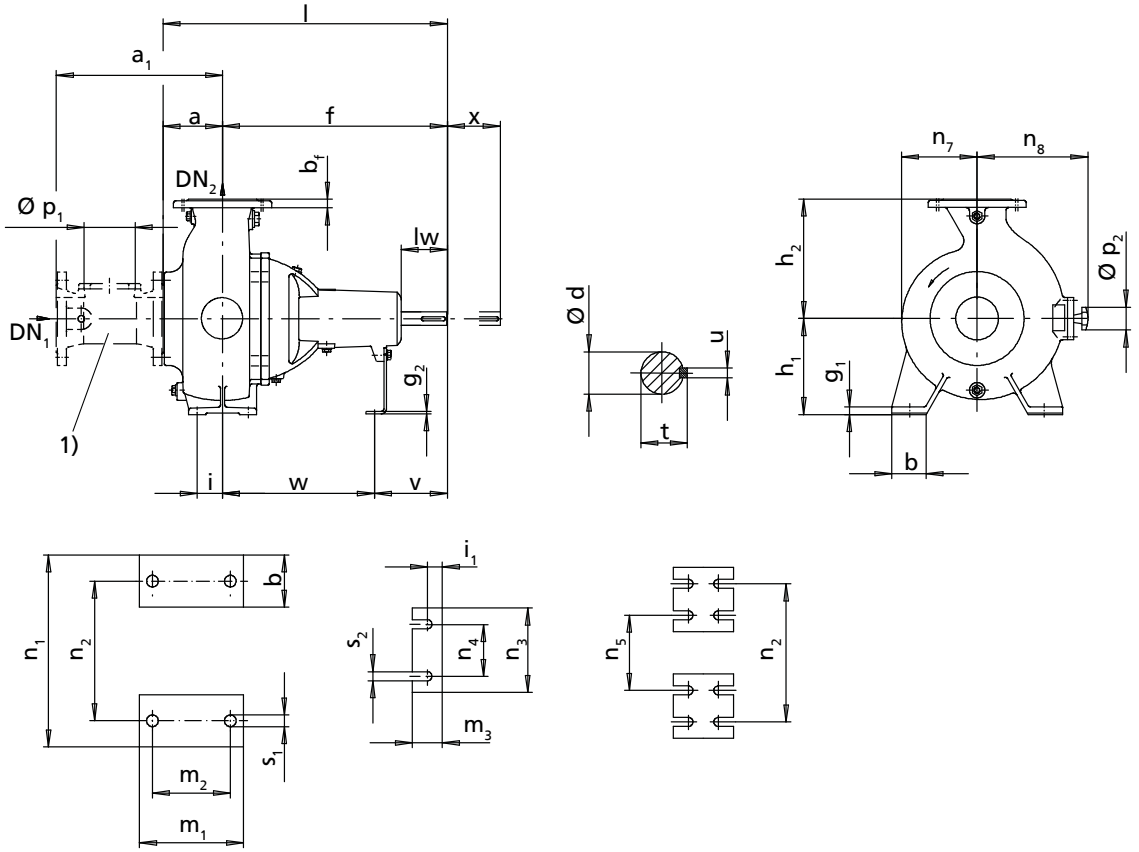

Fig. 1: General arrangement drawing Sewatec Figure 0 (bare-shaft pump)

1) Suction-side flanged spacer can be supplied as an accessory.
Figure 0 (bare-shaft pump) dimensions: (⇨ Page 24)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

2580.36/05-EN-US

General arrangement drawing Sewatec 3EN (E1, E2)

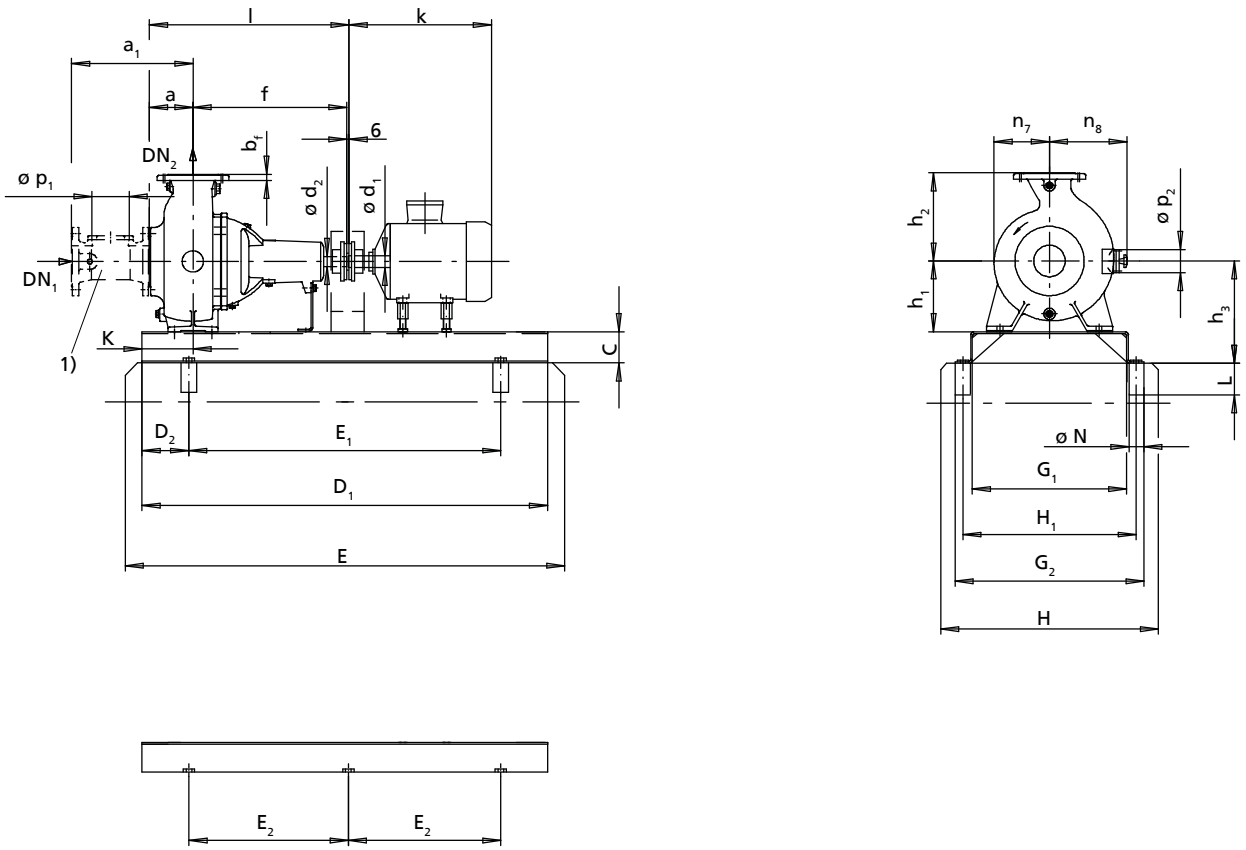

Fig. 2: General arrangement drawing Sewatec 3EN (E1, E2)

1) Suction-side flanged spacer can be supplied as an accessory.
Sewatec 3EN dimensions: (⇨ Page 29)
Grout baseplate/baseframe with non-shrinking concrete after aligning the pump set.
Motor dimensions: (⇨ Page 132)
Baseplate dimensions: (⇨ Page 130)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

General arrangement drawing Sewatec 3EN (E2, E3)

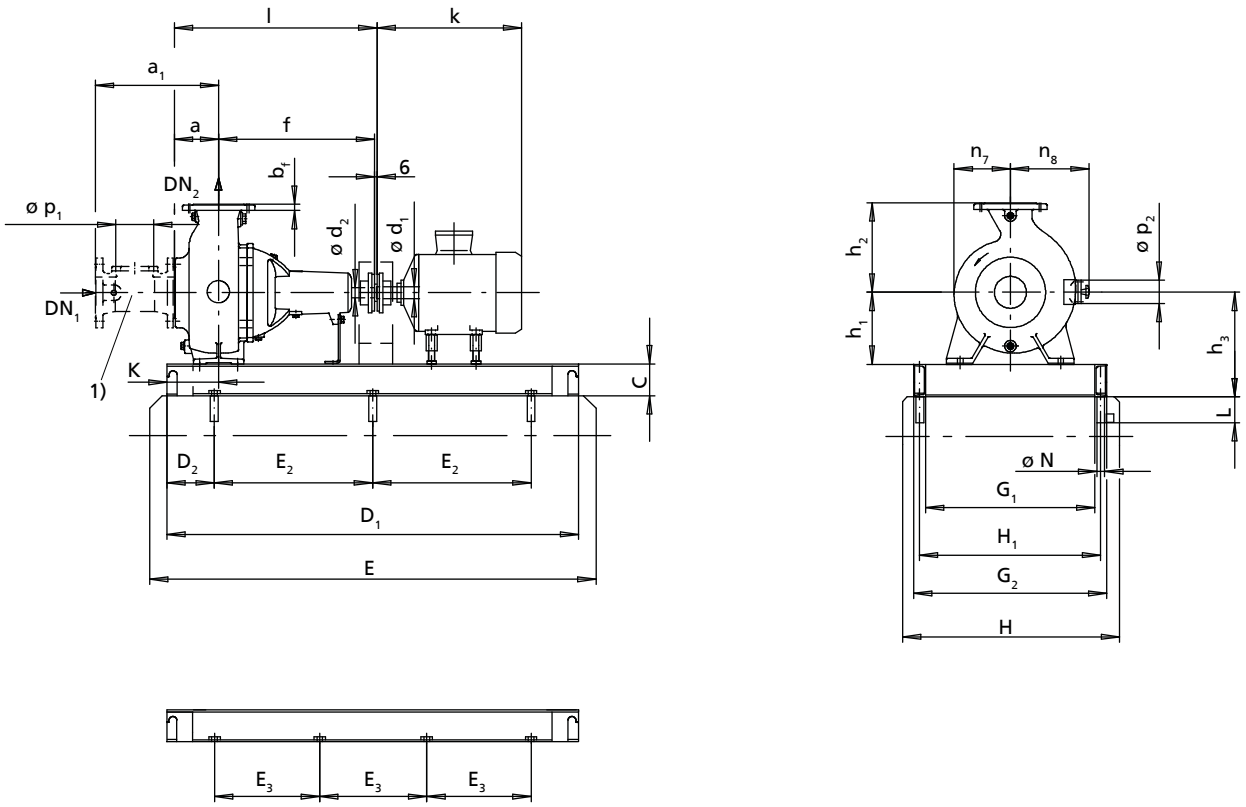

Fig. 3: General arrangement drawing Sewatec 3EN (E2, E3)

1) Suction-side flanged spacer can be supplied as an accessory.
Sewatec 3EN dimensions: (⇨ Page 29)
Grout baseplate/baseframe with non-shrinking concrete after aligning the pump set.
Motor dimensions: (⇨ Page 132)
Baseplate dimensions: (⇨ Page 130)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

2580.36/05-EN-US

General arrangement drawing Sewatec 3ENH (E1, E2)

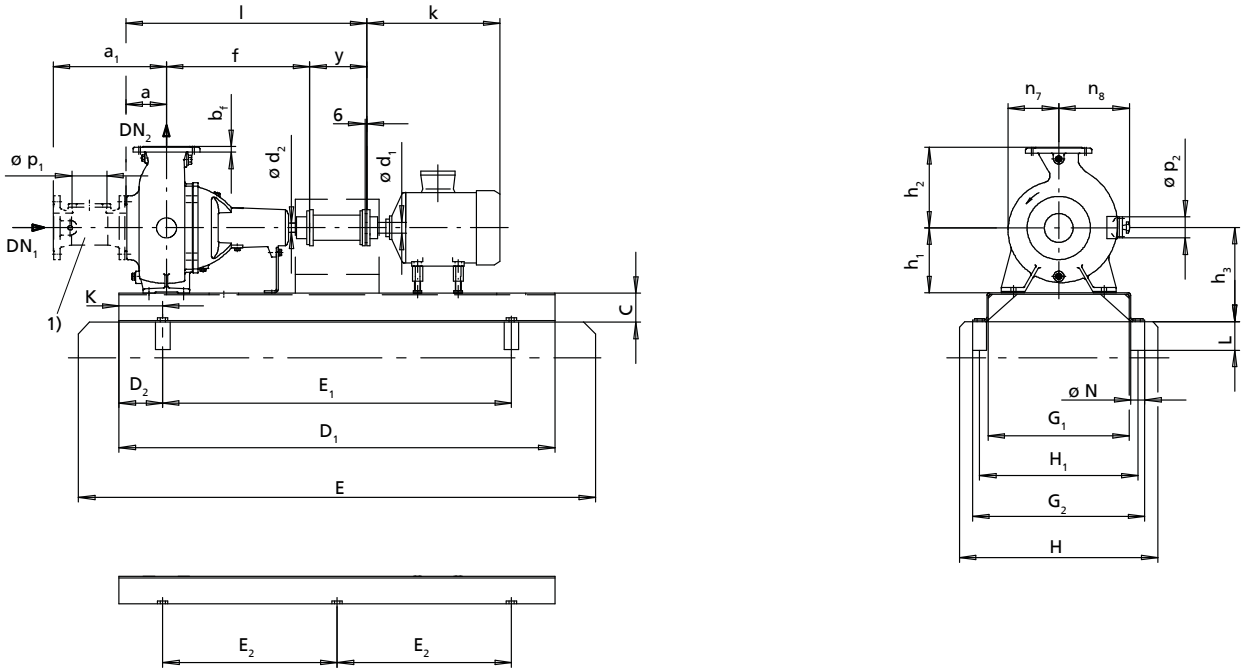

Fig. 4: General arrangement drawing Sewatec 3ENH (E1, E2)

1) Suction-side flanged spacer can be supplied as an accessory.
Sewatec 3ENH dimensions: (⇨ Page 49)
Motor dimensions: (⇨ Page 132)
Baseplate dimensions: (⇨ Page 130)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

General arrangement drawing Sewatec 3ENH (E2, E3)

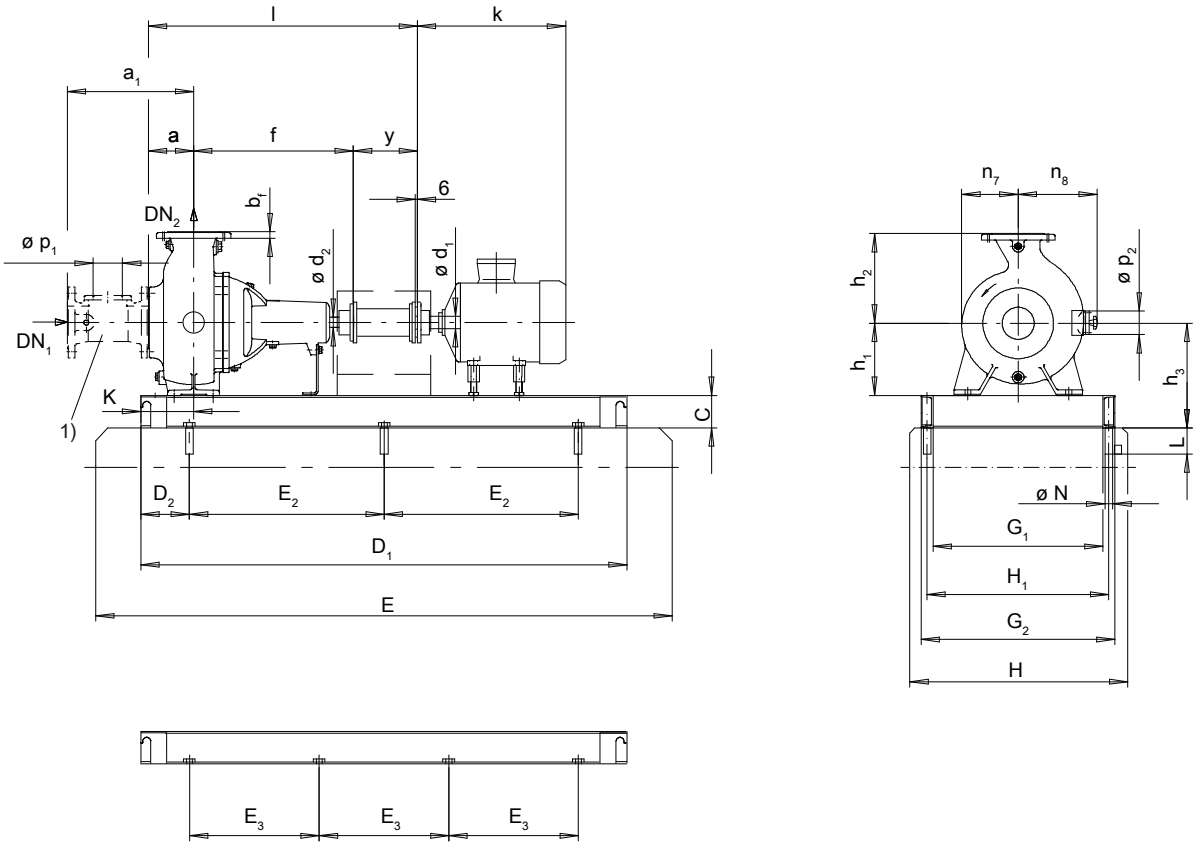

Fig. 5: General arrangement drawing Sewatec 3ENH (E2, E3)

1) Suction-side flanged spacer can be supplied as an accessory.
Sewatec 3ENH dimensions: (⇨ Page 49)
Motor dimensions: (⇨ Page 132)
Baseplate dimensions: (⇨ Page 130)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

2580.36/05-EN-US

General arrangement drawing Sewatec V, on suction elbow

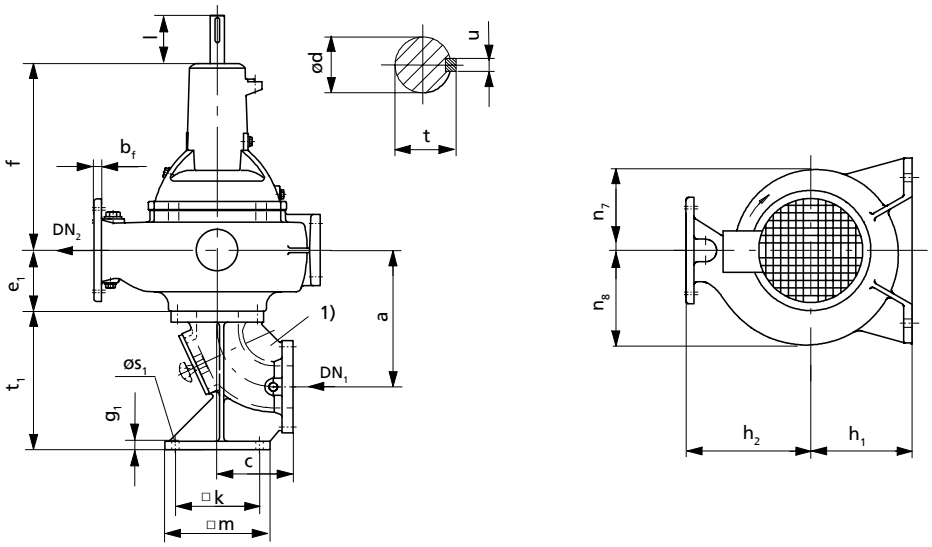

Fig. 6: General arrangement drawing Sewatec V, on suction elbow

1) The suction elbow can be supplied as an accessory.
2) The soleplate cannot be turned in relation to the foundation.
Foundation rails are not generally included in KSB's scope of supply.
Sewatec V dimensions: (⇨ Page 69)
Soleplate dimensions: (⇨ Page 72)
Foundation rail dimensions: (⇨ Page 131)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

2580.36/05-EN-US

General arrangement drawing Sewatec V, on concrete base

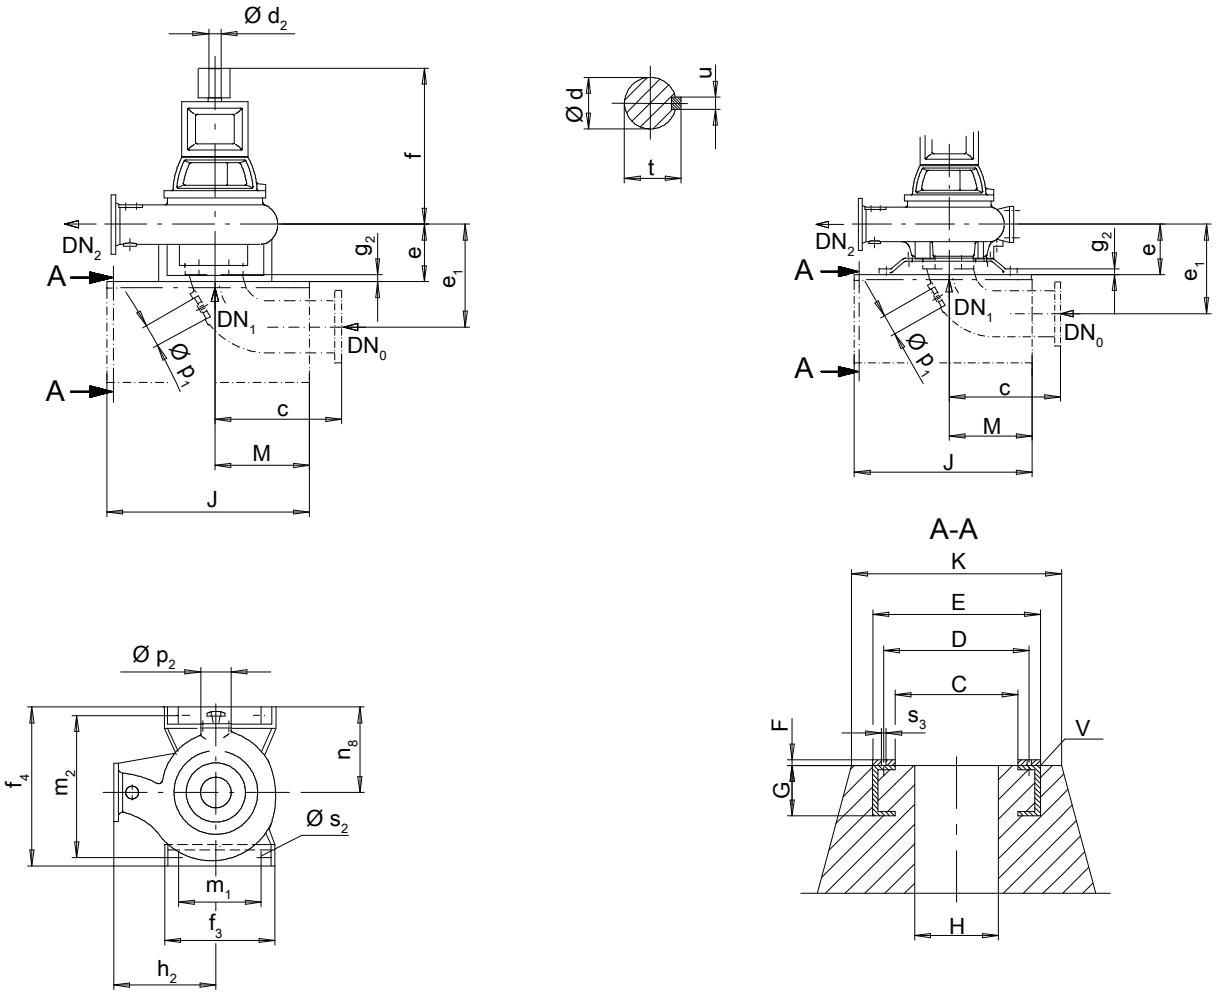

Fig. 7: General arrangement drawing Sewatec V, on concrete base

1) The suction elbow can be supplied as an accessory.
2) The soleplate cannot be turned in relation to the foundation.
Foundation rails are not generally included in KSB's scope of supply.
Sewatec V dimensions: (⇨ Page 69)
Soleplate dimensions: (⇨ Page 72)
Foundation rail dimensions: (⇨ Page 131)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

2580.36/05-EN-US

General arrangement drawing Sewatec VU

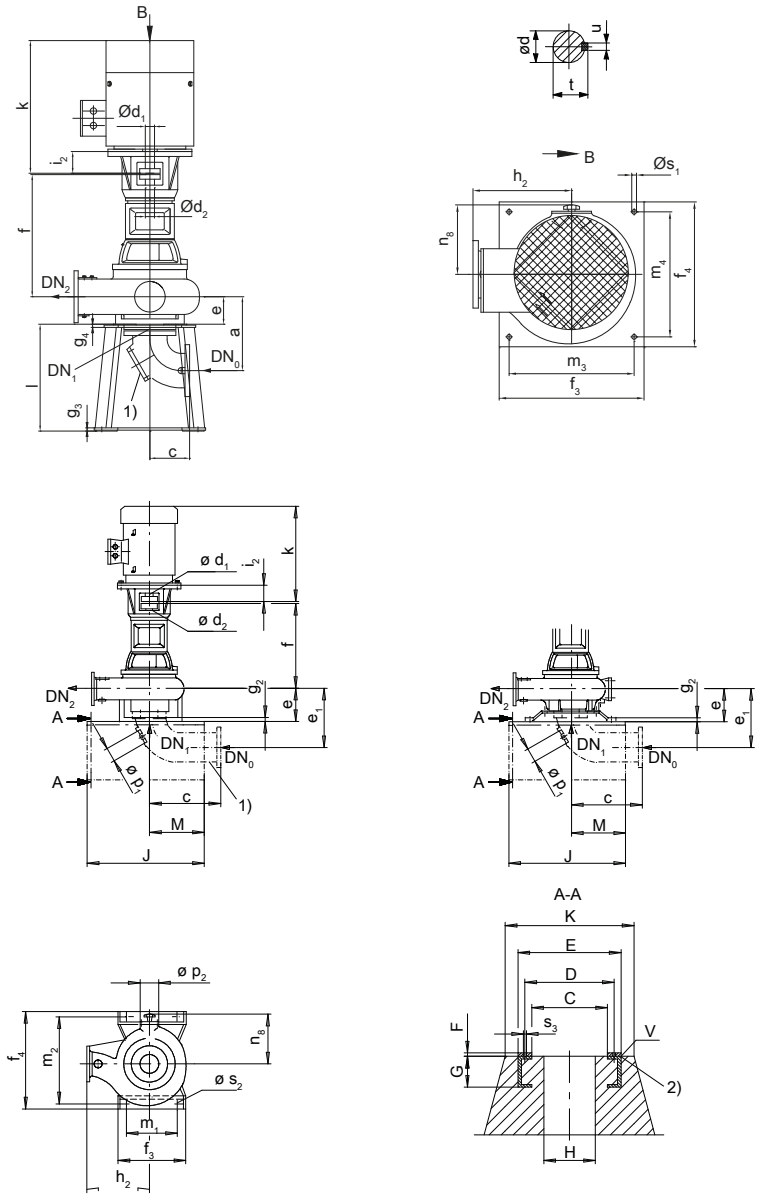

Fig. 8: General arrangement drawing Sewatec VU

1) The suction elbow can be supplied as an accessory.
Foundation rails are not generally included in KSB's scope of supply.

Installation type VU on request.

General arrangement drawing Sewatec VGW, with universal-joint shaft

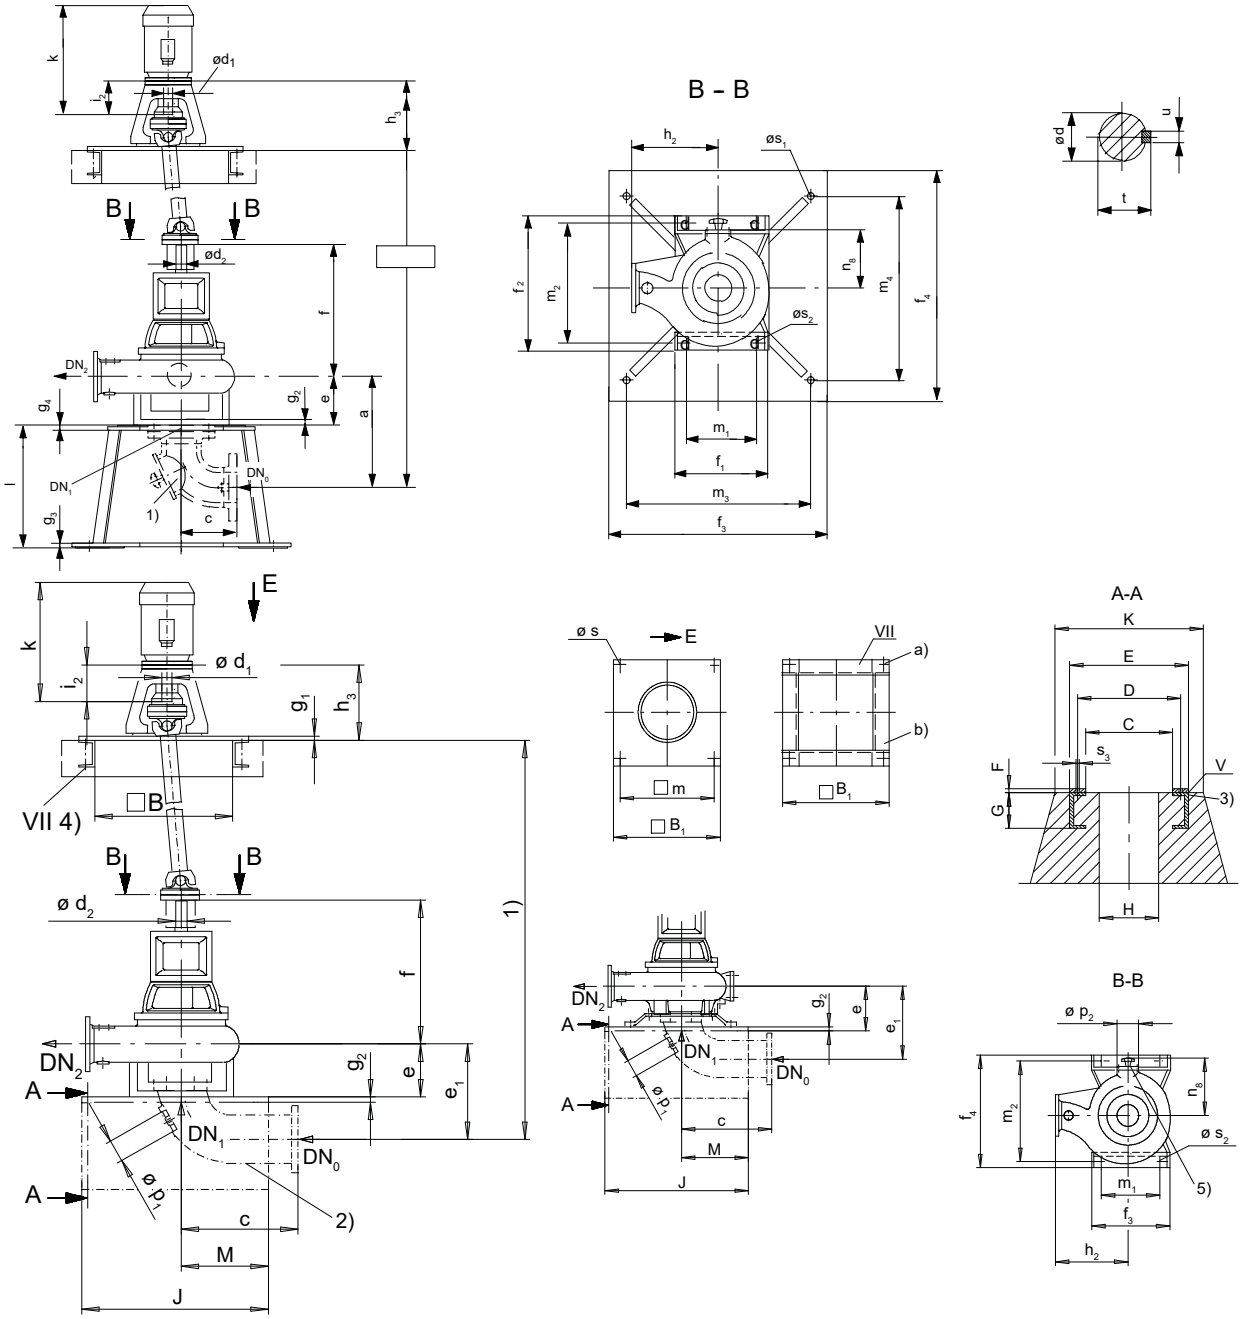

Fig. 9: Installation type VGW, with universal-joint shaft

1) Variable
2) The suction elbow can be supplied as an accessory.
3) Foundation rails are not generally included in KSB's scope of supply.
4) The drive support frame is not generally included in KSB's scope of supply.
a) The tapped holes are drilled during installation.
b) Channel section with welded anchor
Sewatec VGW dimensions: (⇨ Page 93)
Motor dimensions: (⇨ Page 132)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

2580.36/05-EN-US

General arrangement drawing Sewabloc BLOC

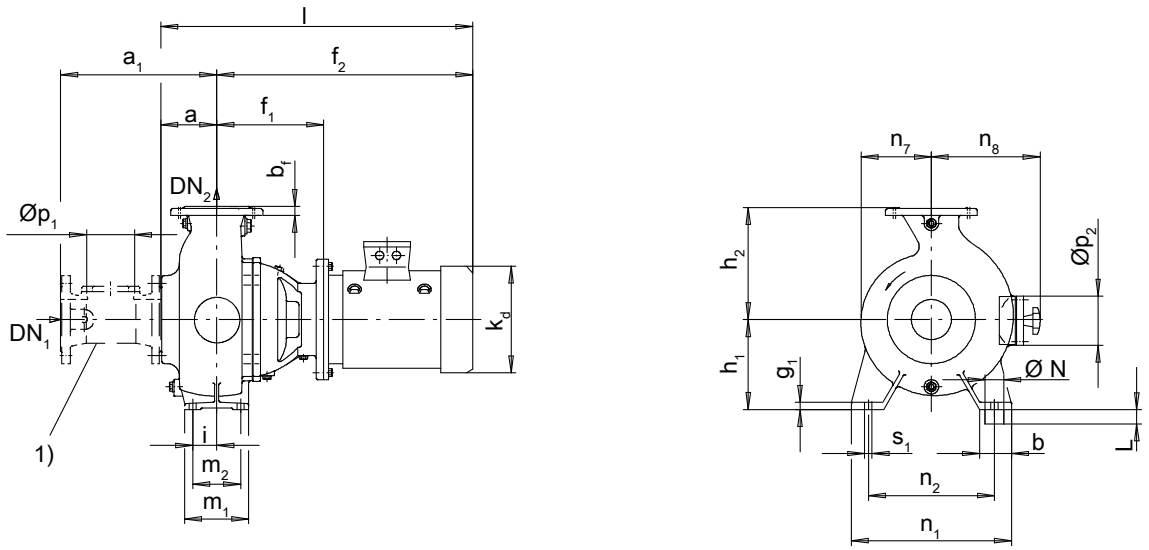

Fig. 10: General arrangement drawing Sewabloc BLOC

1) Suction-side flanged spacer can be supplied as an accessory.
a) Pump center
Foundation rails are not generally included in KSB's scope of supply.
Sewabloc BLOC dimensions: (⇨ Page 118)
Motor dimensions: (⇨ Page 132)
Foundation rail dimensions: (⇨ Page 131)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

General arrangement drawing Sewabloc BLOC-VF

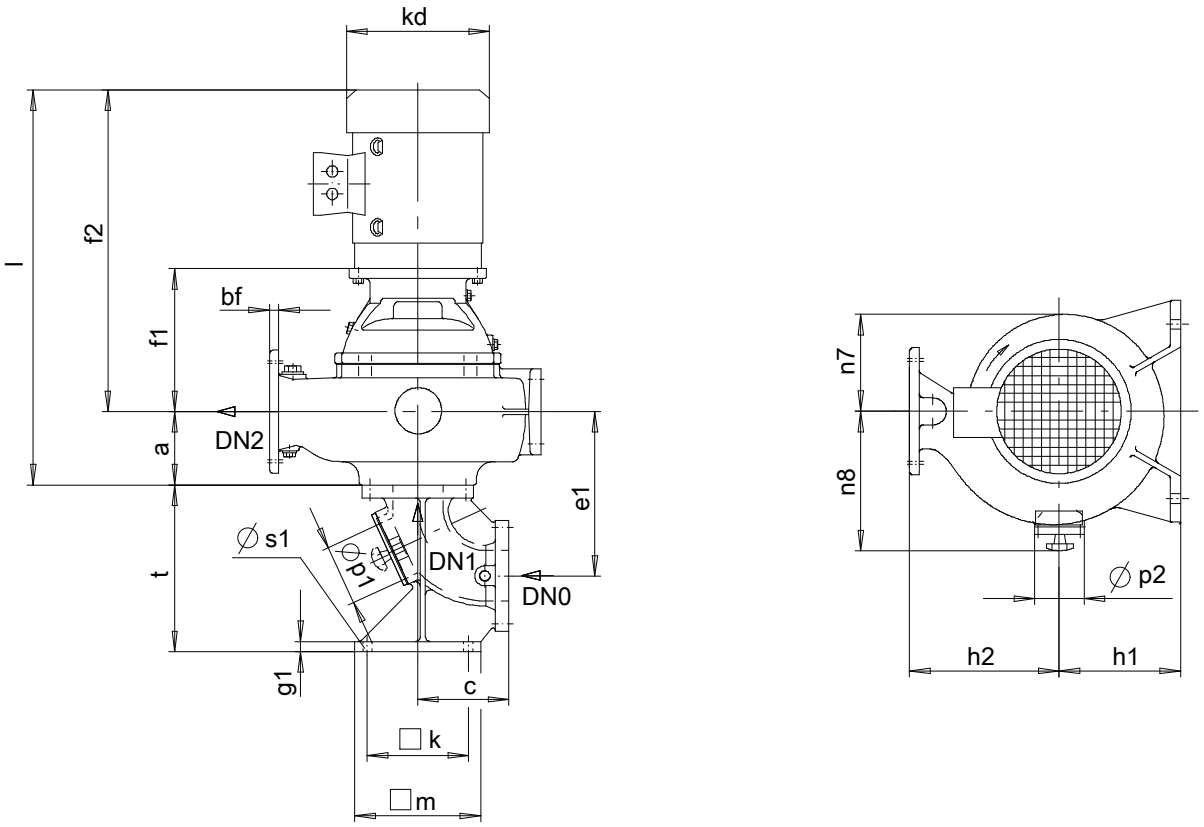

Fig. 11: General arrangement drawing Sewabloc BLOC-VF

1) The suction elbow can be supplied as an accessory.
Sewabloc BLOC-VF dimensions: (⇨ Page 124)
Motor dimensions: (⇨ Page 132)
Flange connection dimensions: (⇨ Page 133)
Dimensions of auxiliary connections: (⇨ Page 134)

2580.36/05-EN-US

Dimensions and weights

Symbols key

Table 3: Symbols key

Symbol	Description
Ⓐ	Dimensions for KSB standard motor
Ⓑ	Dimensions for KSB standard motor Motor flange dimensions and shaft dimensions to DIN 42677
Ⓒ	Dimension for orientation
Ⓓ	Weight without flanged spacer, with motor
Ⓔ	Weight of pump with motor and baseplate, without flanged spacer
Ⓕ	Weight without flanged spacer
Ⓖ	Not including weight of coupling
Ⓗ	Not including weight of belt drive, countershaft and coupling
Ⓘ	Weight without suction elbow, with soleplate
Ⓙ	Weight without suction elbow, with motor
Ⓚ	Weight without suction elbow and without motor
Ⓛ	Weight without suction elbow, with motor and soleplate
Ⓜ	Weight without suction elbow, universal-joint shaft, motor, motor soleplate
Ⓝ	An inspection hole in the pump casing cannot be provided.
Ⓞ	The inspection hole in the pump casing is situated on the opposite side.
Ⓟ	Tapped holes are drilled during installation. Channel section with welded anchor
Ⓠ	Observe max. permissible rotational speed and bearing bracket size.
Ⓡ	P2 = 160/200 kW
Ⓢ	P2 = 250/315 kW
Ⓣ	r = 450
Ⓤ	r = 500
Ⓥ	Siemens 1LE5
Ⓦ	Fixed speed only / On request only
Ⓨ	h_3 = 300 up to motor 280 M
Ⓩ	h_3 = 300 up to motor 280 M; h_3 = 550 from motor 315 S
ⓐ	h_3 = 300 up to motor 445T
ⓑ	h_3 = 300 up to motor 445T; h_3 = 550 from motor 447T
-	No comment

Installation type Figure 0

Table 4: Figure 0 (bare-shaft pump) [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange		Pump										Flanged spacer		Shaft stub				Pump feet																		Clearance for removal	[kg] Ⓟ	Comment
				DN_1	DN_2	a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	lw	t	u	g_1	g_2	m_1	m_2	m_3	n_1	n_2	n_3	n_4	n_5	s_1	s_2	i	i_1	v	w	x		
50-215	F	S01	12	65	50	97	65	20	494,5	170	222	591,5	135	150	-	302	80	32	110	34,2	10	14	4	125	95	48	320	250	160	110	-	16	14	47,5	20	168	326,5	72	72	Ⓝ
50-216	F	S01	12	65	50	97	65	20	494,5	170	222	591,5	135	150	-	302	80	32	110	34,2	10	14	4	125	95	48	320	250	160	110	-	16	14	47,5	20	168	326,5	92	72	Ⓝ
50-250	K	S01	12	65	50	97	65	20	493	170	222	590,0	155	155	-	302	80	32	110	34,2	10	14	4	125	95	48	320	250	160	110	-	15	14	47,5	20	168	325	140	74	Ⓝ
50-251	K	S02	12	65	50	97	65	20	493	170	222	590,0	155	155	-	302	80	48	110	51,2	14	14	4	125	95	48	320	250	160	110	-	15	14	47,5	20	168	325	140	76	Ⓝ
65-215	F	S01	12	80	65	97	65	20	513,5	225	237	610,5	130	155	-	362	80	32	110	34,2	10	14	6	125	95	48	320	250	160	110	-	16	14	47,5	20	166	347,5	81	78	Ⓝ
65-216	E	S02	12	80	65	97	65	22	511,3	225	237	608,3	155	190	-	362	80	48	110	51,2	14	14	6	125	95	48	320	250	160	110	-	16	14	50,2	20	167	344,3	148	90	Ⓝ
65-217	F	S01	12	80	65	97	65	20	492,5	225	237	589,5	130	155	-	362	80	32	110	34,2	10	14	6	125	95	48	320	250	160	110	-	16	14	47,5	20	166	325	81	78	Ⓝ
65-250	K	S01	12	80	65	97	65	20	515	225	237	612,0	160	200	-	302	80	32	110	34,2	10	14	6	125	95	48	320	250	160	110	-	15	14	47,5	20	166	347	180	86	Ⓝ
80-215	F	S01	12	100	80	123	65	22	498,5	225	247	621,5	151	151	-	377	120	32	110	34,2	10	14	6	125	95	48	320	250	160	110	-	16	14	47,5	20	166	360,5	92	76	Ⓝ
80-216	F	S01	12	100	80	123	65	22	526,5	225	247	649,5	130	165	-	377	120	32	110	34,2	10	14	6	125	95	48	320	250	160	110	-	16	14	47,5	20	166	360,5	92	76	Ⓝ
80-216	E	S02	12	100	80	123	65	22	518,8	225	247	641,8	165	200	-	377	120	48	110	51,2	14	14	6	125	95	48	320	250	160	110	-	14	14	47,5	20	167	351,7	169	101	Ⓝ
80-217	F	S01	12	100	80	123	65	22	498,5	225	247	621,5	151	151	-	377	120	32	110	34,2	10	14	6	125	95	48	320	250	160	110	-	16	14	40	20	166	332,5	92	76	Ⓝ
80-250	K	S01	12	100	80	107	65	20	517	225	247	624,0	160	175	-	362	120	32	110	34,2	10	14	6	125	95	48	320	250	160	110	-	15	14	47,5	20	168	349	165	90	Ⓝ
80-252	F	S01	12	100	80	107	65	20	517	225	247	624,0	160	175	-	362	120	32	110	34,2	10	14	6	125	95	48	320	250	160	110	-	15	14	47,5	20	168	349	130	90	Ⓝ
80-253	F	S02	12	100	80	121	65	20	531	225	247	652,0	160	175	-	362	120	48	110	51,2	14	14	6	125	95	48	320	250	160	110	-	15	14	47,5	20	167	363	130	99	Ⓝ
80-253	E	S02	12	100	80	121	65	20	531	225	247	652,0	160	175	-	362	120	48	110	51,2	14	14	6	125	95	48	320	250	160	110	-	15	14	47,5	20	167	363	195	109	Ⓝ
80-315	K	S03	12	100	80	107	80	20	595	225	247	702,0	180	180	-	362	120	60	110	63,2	18	18	4	160	120	48	400	315	160	110	-	19	14	60	20	168	427	180	132	Ⓝ
80-315	D	S03	12	100	80	187	90	22	593	280	257	780,0	180	205	-	442	120	60	110	63,2	18	6	6	220	150	48	500	400	160	110	-	19	14	103	20	168	425	230	184	Ⓝ
80-315	D	S05	12	100	80	187	90	22	741	280	257	928,0	180	205	-	442	120	60	140	63,2	18	35	12	220	150	80	500	400	215	140	-	19	18	123	39	220	520	230	259	Ⓝ
80-316	D	S03	12	125	80	207	70	22	593	280	297	800,0	195	225	-	462	120	60	110	63,2	18	35	6	220	150	48	500	400	160	110	-	19	14	123	20	168	425	250	184	Ⓝ
80-317	D	S03	12	100	80	172	90	22	599	280	257	771,0	181	201	-	442	120	60	110	63,2	18	6	6	220	150	48	500	400	160	110	-	19	14	125	20	221	378	250	186	Ⓝ
80-317	F	S03	12	100	80	107	80	20	595	225	247	702,0	180	180	-	362	120	60	110	63,2	18	18	4	160	120	48	400	315	160	110	-	19	14	60	20	168	427	180	132	Ⓝ
100-215	F	S01	12	100	100	137	80	27	535,5	225	277	672,5	205	240	100	392	120	32	110	34,2	10	18	6	160	120	48	400	315	160	110	-	20	14	60	20	166	369,5	92	88	-
100-250	E	S01	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	32	110	34,2	10	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	96	-
100-251	F	S02	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	48	110	51,2	14	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	103	-
100-252	F	S01	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	32	110	34,2	10	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	96	-
100-253	F	S02	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	48	110	51,2	14	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	103	-
100-253	E	S02	12	100	100	137	80	27	532,8	225	277	669,8	205	285	90	392	120	48	110	51,2	14	18	6	160	120	48	400	315	160	110	-	20	14	60	20	167	365,8	195	118	-
100-253	K	S02	12	100	100	137	80	27	532,8	225	277	669,8	205	282	90	392	120	48	110	51,2	14	18	6	160	120	48	400	315	160	110	-	20	14	60	20	167	365,8	194	119	-
100-253	D	S02	12	150	100	205	70	27	531	280	380	736,0	205	330	100	457	150	48	110	51,2	14	35	6	250	150	48	500	400	160	110	-	19	14	116	20	168	363	250	185	-
100-254	F, K	S01	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	32	110	34,2	10	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	96	-
100-255	E	S02	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	48	110	51,2	14	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	103	-
100-255	K	S02	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	48	110	51,2	14	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	103	-
100-315	D	S05	12	125	100	173	70	27	754	280	340	927,0	205	250	100	425	120	60	140	63,2	18	35	12	200	150	80	500	400	160	140	-	19	18	109	39	220	534	220	280	-
100-316	D	S03	12	150	100	240	70	27	605	280	340	845,0	210	305	100	492	150	60	110	63,2	18	35	6	200	150	48	500	400	160	110	-	19	14	89	20	168	437	250	220	-
100-253	D	S02	12	150	100	202	70	27	531	280	380	733,0	205	330	100	457	150	48	110	51,2	14	35	6	250	150	48	500	400	160	110	-	19	14	116	20	168	363	250	185	-
100-254	F	S01	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	32	110	34,2	10	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	96	-
100-254	K	S01	12	100	100	137	80	27	530	225	277	667,0	180	280	118	392	120	32	110	34,2	10	18	6	160	120	48	400	315	160	110	-	19	14	60	20	168	362	200	96	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Pump										Flanged spacer		Shaft stub				Pump feet																		Clearance for removal	[kg] Ⓟ	Comment
				DN_1	DN_2	a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	lw	t	u	g_1	g_2	m_1	m_2	m_3	n_1	n_2	n_3	n_4	n_5	s_1	s_2	i	i_1	v	w	x		
100-315	D	S05	12	125	100	170	70	27	754	280	337	924,0	205	250	100	425	120	60	140	63,2	18	35	12	200	150	80	500	400	160	140	-	19	18	109	39	220	534	220	280	-
100-316	D	S03	12	150	100	237	70	27	605	280	337	842,0	210	305	100	492	150	60	110	63,2	18	35	6	200	150	48	500	400	160	110	-	19	14	89	20	168	437	250	220	-
100-316	F	S03	12	150	100	137	80	25	604	280	312	741,0	200	290	90	418	150	60	110	63,2	18	18	6	175	120	48	400	315	160	110	-	19	14	60	20	181	423	200	170	-
100-316	K	S03	12	150	100	137	80	25	604	280	312	741,0	200	290	90	418	150	60	110	63,2	18	18	6	175	120	48	400	315	160	110	-	19	14	60	20	181	423	200	170	-
100-317	E	S03	12	125	100	137	80	27	616,5	225	322	753,5	205	290	85	392	120	60	110	63,2	18	18	6	175	120	48	400	315	160	110	-	19	14	38	20	170,5	446	206	175	-
100-400	K	S04	12	150	100	147	112	24	746	315	397	893,0	305	370	100	402	150	60	140	63,2	18	17	6	200	150	80	507	400	215	140	-	23	18	69	20	220	526	230	350	-
100-400	K	S05	12	150	100	147	112	24	746	315	397	893,0	305	370	100	402	150	60	140	63,2	18	17	12	200	150	80	507	400	215	140	-	23	18	69	39	220	526	230	350	-
100-401	F	S04	12	125	100	157	185	27	740	315	397	897,0	270	370	120	412	120	60	140	63,2	18	32	6	210	150	80	550	450	215	140	-	23	18	85	20	220	520	230	310	-
100-401	E	S04	12	125	100	157	185	27	740	315	397	897,0	270	370	120	412	120	60	140	63,2	18	32	6	210	150	80	550	450	215	140	-	23	18	85	20	220	520	230	310	-
100-401	K	S04	12	125	100	157	185	27	740	315	397	897,0	270	370	120	412	120	60	140	63,2	18	32	6	210	150	80	550	450	215	140	-	23	18	85	20	220	520	230	310	-
100-401	F	S05	12	125	100	157	185	27	740	315	397	897,0	270	370	120	412	120	60	140	63,2	18	32	12	210	150	80	550	450	215	140	-	23	18	85	39	220	520	230	310	-
100-401	K	S05	12	125	100	157	185	27	740	315	397	897,0	270	370	120	412	120	60	140	63,2	18	32	12	210	150	80	550	450	215	140	-	23	18	85	39	220	520	230	310	-
100-403	D	S04	12	200	100	147	145	24	726	315	397	873,0	305	370	100	402	150	60	140	63,2	18	20	6	210	150	80	500	400	215	140	-	23	18	85	20	220	517	230	350	-
100-403	D	S05	12	200	100	147	145	24	726	315	397	873,0	305	370	100	402	150	60	140	63,2	18	20	12	210	150	80	500	400	215	140	-	23	18	85	39	220	517	230	350	-
150-253	D	S02	12	150	150	163	150	29	573,5	280	397	736,5	219	340	120	418	150	48	110	51,2	14	25	6	220	150	48	500	400	160	110	-	19	14	73	20	168	405,5	270	163	-
150-315	F	S03	12	150	150	163	100	29	641	280	397	804,0	250	345	118	418	150	60	110	63,2	18	18	6	200	150	48	500	400	160	110	-	19	14	75	20	168	473	250	180	-
150-315	K	S03	12	150	150	163	100	29	641	280	397	804,0	250	345	118	418	150	60	110	63,2	18	18	6	200	150	48	500	400	160	110	-	19	14	75	20	168	473	250	180	-
150-315	D	S03	12	150	150	217	150	29	617	315	397	834,0	250	385	120	472	150	60	110	63,2	18	22	6	200	150	48	500	400	160	110	-	19	14	75	20	168	448	270	250	-
150-317	E	S03	12	150	150	163	100	29	641	280	367	804,0	250	345	118	418	150	60	110	63,2	18	18	6	200	150	48	500	400	160	110	-	19	14	75	20	168	473	250	180	-
150-317	K	S03	12	150	150	97	100	29	617,5	280	367	714,5	250	350	100	352	150	60	110	63,2	18	18	6	200	150	48	500	400	160	110	-	20	14	75	20	168,5	449	182	197	-
150-317	K	S05	12	150	150	97	100	29	740,7	280	367	837,7	250	350	100	352	150	60	140	63,2	18	18	6	200	150	48	500	400	160	110	-	20	14	75	20	220	520,7	182	288	-
150-317	D	S03	12	200	150	97	100	29	617,5	280	367	714,5	250	350	100	452	150	60	110	63,2	18	18	6	200	150	48	500	400	160	110	-	20	14	75	20	168,5	449	182	206	-
150-400	D	S05	12	200	150	267	185	28	725	315	397	992,0	254	365	100	622	200	60	140	63,2	18	32	12	210	150	80	550	450	215	140	-	24	18	101	39	220	504	250	485	-
150-400	K	S04	12	200	150	167	100	28	721	355	497	888,0	300	390	100	522	200	60	140	63,2	18	24	6	200	150	80	550	450	215	140	-	23	18	75	20	220	501	280	465	-
150-400	K	S05	12	200	150	167	100	28	721	355	497	888,0	300	390	100	522	200	60	140	63,2	18	24	12	200	150	80	550	450	215	140	-	23	18	75	39	220	501	280	465	-
150-401	F	S04	12	150	150	177	100	28	750	355	497	927,0	325	360	120	432	150	60	140	63,2	18	24	6	200	150	80	550	450	215	140	-	23	18	75	20	220	530	280	395	◎
150-401	K	S04	12	150	150	177	100	28	750	355	497	927,0	325	360	120	432	150	60	140	63,2	18	24	6	200	150	80	550	450	215	140	-	23	18	75	20	220	530	280	395	◎
150-401	F	S05	12	150	150	177	100	28	750	355	497	927,0	325	360	120	432	150	60	140	63,2	18	24	12	200	150	80	550	450	215	140	-	23	18	75	39	220	530	280	395	◎
150-401	K	S05	12	150	150	177	100	28	750	355	497	927,0	325	360	120	432	150	60	140	63,2	18	24	12	200	150	80	550	450	215	140	-	23	18	75	39	220	530	280	395	◎
150-401	D	S06	12	250	150	324	185	28	968	355	472	1292,0	280	420	120	729	200	75	195	79,7	20	32	12	210	150	80	550	450	215	140	-	24	18	80	39	250	718	300	710	-
150-403	K	S04	12	200	150	167	100	28	721	355	497	888,0	300	390	100	522	200	60	140	63,2	18	24	6	200	150	80	550	450	215	140	-	23	18	75	20	220	501	280	465	-
150-403	K	S05	12	200	150	167	100	28	721	355	497	888,0	300	390	100	522	200	60	140	63,2	18	24	12	200	150	80	550	450	215	140	-	23	18	75	39	220	501	280	465	-
150-403	D	S04	12	200	150	167	100	28	721	355	497	888,0	300	390	100	522	200	60	140	63,2	18	24	6	200	150	80	550	450	215	140	-	23	18	75	20	220	501	280	465	-
150-403	D	S05	12	200	150	167	100	28	721	355	497	888,0	300	390	100	522	200	60	140	63,2	18	24	12	200	150	80	550	450	215	140	-	23	18	75	39	220	501	280	465	-
151-401	K	S05	12	150	150	180	100	30	750	355	500	930,0	320	360	118	430	150	60	140	63,2	18	24	18	200	150	80	550	450	215	140	-	25	18	75	39	220	530	280	430	◎
151-403	K	S04	12	200	150	167	100	28	721	355	497	888,0	300	390	100	522	200	60	140	63,2	18	24	6	200	150	80	550	450	215	140	-	23	18	75	20	220	501	280	465	-
151-403	K	S05	12	200	150	167	100	28	721	355	497	888,0	300	390	100	522	200	60	140	63,2	18	24	12	200	150	80	550	450	215	140	-	23	18	75	39	220	501	280	465	-
150-503	K	S06	12	150	150	157	100	28	1003	375	497	1160,0	305	380	118	410	150	75	195	79,7	20	24	18	200	150	80	550	450	215	140	-	25	18	75	39	250	733	280	670	-
150-503	K	S07	12	150	150	157	100	28	1148	375	497	1305,0	305	380	118	410	150	95	220	100,2	25	24	16	200	150	80	550	450	215	140	-	25	18	75	39	285	843	280	785	-
150-503	D	S06	12	200	150	157	100	28	1003	375	497	1160,0	305	380	118	510	150	75	195	79,7	20	24	18	200	150	80	550	450	215	140	-	25	18	75	39	250	733	280	686	-
150-503	D	S07	12	200	150	157	100	28	1148	375	497	1305,0	305	380	118	510	150	95	220	100,2	25	24	16	200	150	80	550	450	215	140	-	25	18	75	39	285	843	280	805	-
200-315	K	S03	12	200	200	180	100	30	620	315	447	800,0	240	435	118	532	200	60	110	63,2	18	18	6	200	150	48	500	400	160	110	-	19	14	75	20	168	452	250	232	-
200-315	D	S03	12	200	200	220	185	30	666	375	497	886,0	290	450	143	572	200	60	110	63,2	18	30	6	210	150	48	550	450	160	110	-	19	14	50	20	168	498	320	300	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Pump										Flanged spacer		Shaft stub				Pump feet																		Clearance for removal	[kg] Ⓟ	Comment
				DN_1	DN_2	a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	lw	t	u	g_1	g_2	m_1	m_2	m_3	n_1	n_2	n_3	n_4	n_5	s_1	s_2	i	i_1	v	w	x		
200-316	K	S03	12	200	200	180	100	30	620	315	447	800,0	240	435	118	532	200	60	110	63,2	18	18	6	200	150	48	500	400	160	110	-	19	14	75	20	168	452	250	232	-
200-317	K	S03	12	200	200	147	100	29	615,5	315	447	762,5	260	410	118	502	200	60	110	63,2	18	18	6	210	150	48	500	400	160	110	-	19	14	80	20	168,5	447	210	249	-
200-318	K	S03	12	200	200	147	100	29	615,5	315	447	762,5	260	407	118	502	200	60	110	63,2	18	18	6	210	150	48	500	400	160	110	-	19	14	80	20	168,5	447	237	245	-
200-330	K	S04	12	250	200	177	185	30	755	355	497	932,0	300	425	118	582	200	60	140	63,2	18	32	6	210	150	80	550	450	215	140	-	24	18	69	20	220	536	250	410	-
200-330	K	S05	12	250	200	177	185	30	755	355	497	932,0	300	425	118	582	200	60	140	63,2	18	32	12	210	150	80	550	450	215	140	-	24	18	69	39	220	536	250	410	-
200-400	D	S06	12	250	200	302	180	30	985	450	517	1287,0	320	550	125	706	200	75	195	79,7	20	40	12	295	190	80	750	670	215	140	-	26	18	90	39	250	735	380	725	-
200-401	K	S04	12	200	200	222	100	30	800	355	497	1022,0	350	370	200	577	200	60	140	63,2	18	24	6	200	150	80	550	450	215	140	-	23	18	75	20	220	580	345	405	◎
200-401	K	S05	12	200	200	222	100	30	800	355	497	1022,0	350	370	200	577	200	60	140	63,2	18	24	12	200	150	80	550	450	215	140	-	23	18	75	39	220	580	345	405	◎
200-402	K	S04	12	200	200	157	105	30	723	375	497	880,0	325	440	140	512	200	60	140	63,2	18	24	6	200	152	80	550	450	215	140	-	25	18	76	20	220	503	345	405	-
200-402	K	S05	12	200	200	157	105	30	723	375	497	880,0	325	440	140	512	200	60	140	63,2	18	24	12	200	152	80	550	450	215	140	-	25	18	76	39	220	503	345	405	-
200-402	K	S06	12	200	200	157	105	30	953	375	497	1110,0	325	440	140	512	200	75	195	79,7	20	24	12	200	152	80	550	450	215	140	-	25	18	76	39	250	703	345	460	-
200-402	D	S04	12	250	200	222	105	30	723	375	497	945,0	325	440	140	512	200	60	140	63,2	18	24	6	200	152	80	550	450	215	140	-	25	18	76	20	220	503	345	405	-
200-402	D	S05	12	250	200	222	105	30	723	375	497	945,0	325	440	140	512	200	60	140	63,2	18	24	12	200	152	80	550	450	215	140	-	25	18	76	39	220	503	345	405	-
200-402	D	S06	12	250	200	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	195	79,7	20	24	12	200	152	80	550	450	215	140	-	25	18	76	39	250	703	345	460	-
200-403	K	S04	12	200	200	157	105	30	723	375	497	880,0	325	440	140	512	200	60	140	63,2	18	24	6	200	152	80	550	450	215	140	-	25	18	76	20	220	503	345	405	-
200-403	K	S05	12	200	200	157	105	30	723	375	497	880,0	325	440	140	512	200	60	140	63,2	18	24	12	200	152	80	550	450	215	140	-	25	18	76	39	220	503	345	405	-
200-403	K	S06	12	200	200	157	105	30	953	375	497	1110,0	325	440	140	512	200	75	195	79,7	20	24	12	200	152	80	550	450	215	140	-	25	18	76	39	250	703	345	460	-
200-405	D	S04	12	250	200	222	105	30	723	375	497	945,0	325	440	140	512	200	60	140	63,2	18	24	6	200	152	80	550	450	215	140	-	25	18	76	20	220	503	345	405	-
200-405	D	S05	12	250	200	222	105	30	723	375	497	945,0	325	440	140	512	200	60	140	63,2	18	24	12	200	152	80	550	450	215	140	-	25	18	76	39	220	503	345	405	-
200-405	D	S06	12	250	200	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	195	79,7	20	24	12	200	152	80	550	450	215	140	-	25	18	76	39	250	703	345	460	-
200-501	K	S06	12	250	200	197	180	30	1020	420	557	1217,0	330	460	118	600	200	75	195	79,7	20	40	62	295	190	80	750	670	215	140	-	26	18	115	26	260	760	315	890	-
200-502	K	S06	12	200	200	197	120	30	1015	375	557	1212,0	335	470	118	550	200	75	195	79,7	20	24	16	200	150	80	700	560	215	140	-	23	18	75	39	265	750	250	790	-
200-502	K	S07	12	200	200	197	120	30	1160	375	557	1357,0	335	470	118	550	200	95	220	100,2	25	24	16	200	150	80	700	560	350	270	-	23	18	75	39	300	860	250	905	-
200-503	K	S06	12	200	200	197	120	30	1015	375	557	1212,0	335	470	118	550	200	75	195	79,7	20	24	16	200	150	80	700	560	215	140	-	23	18	75	39	265	750	250	790	-
200-503	K	S07	12	200	200	197	120	30	1160	375	557	1357,0	335	470	118	550	200	95	220	100,2	25	24	16	200	150	80	700	560	350	270	-	23	18	75	39	300	860	250	905	-
200-503	D	S06	12	250	200	197	120	30	1015	375	557	1212,0	335	470	118	600	200	75	195	79,7	20	24	16	200	150	80	700	560	215	140	-	23	18	75	39	265	750	250	780	-
200-503	D	S07	12	250	200	197	120	30	1160	375	557	1357,0	335	470	118	600	200	95	220	100,2	25	24	16	200	150	80	700	560	350	270	-	23	18	75	39	300	860	250	895	-
200-504	K	S06	12	250	200	197	120	30	1015	375	557	1212,0	335	470	118	550	200	75	195	79,7	20	24	16	200	150	80	700	560	215	140	-	23	18	75	39	265	750	250	790	-
200-504	K	S07	12	250	200	197	120	30	1160	375	557	1357,0	335	470	118	550	200	95	220	100,2	25	24	16	200	150	80	700	560	350	270	-	23	18	75	39	300	860	250	905	-
200-505	K	S06	12	250	200	197	120	30	1015	375	557	1212,0	335	470	118	550	200	75	195	79,7	20	24	16	200	150	80	700	560	215	140	-	23	18	75	39	265	750	250	790	-
200-505	K	S07	12	250	200	197	120	30	1160	375	557	1357,0	335	470	118	550	200	95	220	100,2	25	24	16	200	150	80	700	560	350	270	-	23	18	75	39	300	860	250	905	-
200-631	K	S07	12	250	200	230	150	30	1171	500	650	1401,0	420	570	143	630	200	95	220	100,2	25	32	18	350	250	80	900	750	350	270	-	28	18	125	28	300	871	340	1205	-
200-631	K	S08	12	250	200	230	150	30	1171	500	650	1401,0	420	570	143	630	200	110	220	116,2	28	32	18	350	250	80	900	750	350	270	-	28	18	125	28	300	871	340	1215	-
250-400	K	S04	12	250	250	177	180	33	730	425	597	907,0	310	500	143	582	200	60	140	63,2	18	40	6	295	190	80	750	670	215	140	-	26	18	115	20	220	510	225	470	-
250-400	K	S05	12	250	250	177	180	33	730	425	597	907,0	310	500	143	582	200	60	140	63,2	18	40	12	295	190	80	750	670	215	140	-	26	18	115	39	220	510	225	470	-
250-400	D	S05	12	250	250	247	180	33	815	455	597	1062,0	340	550	143	652	200	60	140	63,2	18	40	12	295	190	80	750	670	215	140	-	26	18	30	39	220	595	380	585	-
250-400	D	S06	12	250	250	247	180	33	1045	455	597	1292,0	340	550	143	652	200	75	195	79,7	20	40	12	295	190	80	750	670	215	140	-	26	18	30	39	250	795	380	745	-
250-401	K	S04	12	250	250	177	180	33	730	425	597	907,0	310	500	143	582	200	60	140	63,2	18	40	6	295	190	80	750	670	215	140	-	26	18	115	20	220	510	225	470	-
250-401	K	S05	12	250	250	177	180	33	730	425	597	907,0	310	500	143	582	200	60	140	63,2	18	40	12	295	190	80	750	670	215	140	-	26	18	115	39	220	510	225	470	-
250-401	K	S06	12	250	250	177	180	33	960	425	597	1137,0	310	500	143	582	200	75	195	79,7	20	40	12	295	190	80	750	670	215	140	-	26	18	115	39	250	710	225	535	-
250-402	D	S04	12	250	250	177	180	33	737	425	597	914,0	310	500	143	582	200	60	140	63,2	18	40	6	295	190	80	750	670	215	140	-	26	18	108	20	220	517	225	470	-
250-402	D	S05	12	250	250	177	180	33	737	425	597	914,0	310	500	143	582	200	60	140	63,2	18	40	12	295	190	80	750	670	215	140	-	26	18	108	39	220	517	225	470	-
250-402	D	S06	12	250	250	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	195	79,7	20	40	12	295	190	80	750	670	215	140	-	26	18	108	39	250	716	225	535	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Pump										Flanged spacer		Shaft stub				Pump feet																			Clearance for removal	[kg] ⑮	Comment
				DN_1	DN_2	a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	lw	t	u	g_1	g_2	m_1	m_2	m_3	n_1	n_2	n_3	n_4	n_5	s_1	s_2	i	i_1	v	w	x		
250-403	K	S04	12	250	250	177	180	33	730	425	597	907,0	310	500	143	582	200	60	140	63,2	18	40	6	295	190	80	750	670	215	140	-	26	18	115	20	220	510	225	470	-
250-403	K	S05	12	250	250	177	180	33	730	425	597	907,0	310	500	143	582	200	60	140	63,2	18	40	12	295	190	80	750	670	215	140	-	26	18	115	39	220	510	225	470	-
250-403	K	S06	12	250	250	177	180	33	960	425	597	1137,0	310	500	143	582	200	75	195	79,7	20	40	12	295	190	80	750	670	215	140	-	26	18	115	39	250	710	225	535	-
250-630	K	S07	12	250	250	197	150	33	1190	500	697	1387,0	425	590	143	600	200	95	220	100,2	25	32	16	260	190	80	900	750	350	270	-	28	18	95	39	300	890	315	1080	-
250-630	K	S08	12	250	250	197	150	33	1190	500	697	1387,0	425	590	143	600	200	110	220	116,2	28	32	16	260	190	80	900	750	350	270	-	28	18	95	39	300	890	315	1110	-
250-632	K	S07	12	250	250	197	150	33	1190	500	697	1387,0	425	590	143	600	200	95	220	100,2	25	32	16	260	190	80	900	750	350	270	-	28	18	95	39	300	890	315	1080	-
250-632	K	S08	12	250	250	197	150	33	1190	500	697	1387,0	425	590	143	600	200	110	220	116,2	28	32	16	260	190	80	900	750	350	270	-	28	18	95	39	300	890	315	1110	-
250-900	K	S09	12	350	250	300	250	32	1237	670	900	1537,0	580	670	100	700	200	120	210	127,2	32	30	20	400	300	150	1150	980	400	300	-	39	20	150	60	367	870	330	2385	-
300-400	K	S04	12	300	300	212	180	28	750	450	622	962,0	355	590	143	617	200	60	140	63,2	18	26	6	260	190	80	750	670	215	140	-	28	18	95	20	220	530	300	630	-
300-400	K	S05	12	300	300	212	180	28	750	450	622	962,0	355	590	143	617	200	60	140	63,2	18	26	12	260	190	80	750	670	215	140	-	28	18	95	39	220	530	300	630	-
300-400	D	S05	12	300	300	312	180	32	752	450	622	1064,0	360	610	143	722	200	60	140	63,2	18	40	12	295	190	80	750	670	215	140	-	26	18	93	39	220	532	400	740	-
300-400	D	S06	12	300	300	312	180	32	980	450	622	1292,0	360	610	143	722	200	75	195	79,7	20	40	12	295	190	80	750	670	215	140	-	26	18	93	39	250	730	400	900	-
300-401	K	S04	12	300	300	212	180	28	750	450	622	962,0	355	590	143	617	200	60	140	63,2	18	26	6	260	190	80	750	670	215	140	-	28	18	95	20	220	530	300	630	-
300-401	K	S05	12	300	300	212	180	28	750	450	622	962,0	355	590	143	617	200	60	140	63,2	18	26	12	260	190	80	750	670	215	140	-	28	18	95	39	220	530	300	630	-
300-402	D	S04	12	300	300	212	180	28	750	450	622	962,0	355	590	143	617	200	60	140	63,2	18	26	6	260	190	80	750	670	215	140	-	28	18	95	20	220	530	300	630	-
300-402	D	S05	12	300	300	212	180	28	750	450	622	962,0	355	590	143	617	200	60	140	63,2	18	26	12	260	190	80	750	670	215	140	-	28	18	95	39	220	530	300	630	-
300-402	D	S06	12	300	300	212	180	28	980	450	622	1192,0	355	590	143	617	200	75	195	79,7	20	26	12	260	190	80	750	670	215	140	-	28	18	95	39	250	729	300	695	-
300-403	K	S05	12	300	300	212	180	28	750	450	622	962,0	355	590	143	617	200	60	140	63,2	18	26	12	260	190	80	750	670	215	140	-	28	18	95	39	220	530	300	630	-
300-500	K	S06	12	300	300	207	130	32	1045	450	597	1252,0	345	530	143	610	200	75	195	79,7	20	26	16	260	190	80	800	670	215	140	-	28	18	95	39	265	780	315	745	-
300-500	K	S07	12	300	300	207	130	32	1190	450	597	1397,0	345	530	143	610	200	95	220	100,2	25	26	16	260	190	80	800	670	350	270	-	28	18	95	39	300	890	315	825	-
300-502	D	S06	12	300	300	207	130	32	1045	450	597	1252,0	345	530	143	610	200	75	195	79,7	20	26	16	260	190	80	800	670	215	140	-	28	18	95	39	265	780	315	780	-
300-502	D	S07	12	300	300	207	130	32	1190	450	597	1397,0	345	530	143	610	200	95	220	100,2	25	26	16	260	190	80	800	670	350	270	-	28	18	95	39	300	890	315	860	-
300-505	K	S06	12	300	300	207	130	32	1045	450	597	1252,0	345	530	143	610	200	75	195	79,7	20	26	16	260	190	80	800	670	215	140	-	28	18	95	39	265	780	315	746	-
300-505	K	S07	12	300	300	207	130	32	1190	450	597	1397,0	345	530	143	610	200	95	220	100,2	25	26	16	260	190	80	800	670	350	270	-	28	18	95	39	300	890	315	826	-
300-505	D	S06	12	300	300	207	130	32	1045	450	597	1252,0	345	530	143	610	200	75	195	79,7	20	26	16	260	190	80	800	670	215	140	-	28	18	95	39	265	780	315	788	-
300-505	D	S07	12	300	300	207	130	32	1190	450	597	1397,0	345	530	143	610	200	95	220	100,2	25	26	16	260	190	80	800	670	350	270	-	28	18	95	39	300	890	315	868	-
350-500	K	S06	12	350	350	287	225	35	1045	560	682	1332,0	400	590	143	690	200	75	195	79,7	20	32	16	400	300	80	730	650	215	140	400	28	18	150	39	265	780	315	940	-
350-500	K	S07	12	350	350	287	225	35	1190	560	682	1477,0	400	590	143	690	200	95	220	100,2	25	32	16	400	300	80	730	650	350	270	400	28	18	150	39	300	890	315	1020	-
350-501	K	S06	12	350	350	287	225	35	1045	560	682	1332,0	400	590	143	690	200	75	195	79,7	20	32	16	400	300	80	730	650	215	140	400	28	18	150	39	265	780	400	940	-
350-501	K	S07	12	350	350	287	225	35	1190	560	682	1477,0	400	590	143	690	200	95	220	100,2	25	32	16	400	300	80	730	650	350	270	400	28	18	150	39	300	890	400	1020	-
350-502	D	S06	12	350	350	287	225	35	1045	560	682	1332,0	400	590	143	690	200	75	195	79,7	20	32	16	400	300	80	730	650	215	140	400	28	18	150	39	265	780	400	990	-
350-502	D	S07	12	350	350	287	225	35	1190	560	682	1477,0	400	590	143	690	200	95	220	100,2	25	32	16	400	300	80	730	650	350	270	400	28	18	150	39	300	890	400	1070	-
350-503	K	S06	12	350	350	287	225	35	1045	560	682	1332,0	400	590	143	690	200	75	195	79,7	20	32	16	400	300	80	730	650	215	140	400	28	18	150	39	265	780	315	940	-
350-503	K	S07	12	350	350	287	225	35	1190	560	682	1477,0	400	590	143	690	200	95	220	100,2	25	32	16	400	300	80	730	650	350	270	400	28	18	150	39	300	890	315	1020	-
350-503	D	S06	12	350	350	287	225	35	1045	560	682	1332,0	400	590	143	690	200	75	195	79,7	20	32	16	400	300	80	730	650	215	140	400	28	18	150	39	265	780	315	990	-
350-503	D	S07	12	350	350	287	225	35	1190	560	682	1477,0	400	590	143	690	200	95	220	100,2	25	32	16	400	300	80	730	650	350	270	400	28	18	150	39	300	890	315	1070	-
350-632	K	S07	12	350	350	247	150	30	1190	560	817	1437,0	470	655	143	650	200	95	220	100,2	25	32	16	360	250	80	900	750	350	270	-	28	18	125	39	300	890	350	1070	-
350-632	K	S08	12	350	350	247	150	30	1190	560	817	1437,0	470	655	143	650	200	110	220	116,2	28	32	16	360	250	80	900	750	350	270	-	28	18	125	39	300	890	350	1110	-
350-633	K	S07	12	350	350	247	150	30	1190	560	817	1437,0	470	655	143	650	200	95	220	100,2	25	32	16	360	250	80	900	750	350	270	-	28	18	125	39	300	890	350	1070	-
350-633	K	S08	12	350	350	247	150	30	1190	560	817	1437,0	470	655	143	650	200	110	220	116,2	28	32	16	360	250	80	900	750	350	270	-	28	18	125	39	300	890	350	1110	-
350-710	K	S08	12	350	350	272	300	36	1175	560	817	1447,0	570	550	143	675	200	110	220	116,2	28	32	18	360	260	80	1150	950	350	270	-	33	18	130	39	300	875	360	1580	◎
350-713	K	S08	12	350	350	287	360	36	1183	600	817	1470,0	570	550	143	675	200	110	220	116,2	28	32	18	360	260	80	1150	950	350	270	-	33	18	130	39	300	875	360	1580	◎
350-713	K	S09	12	350	350	290	360	36	1280	600	820	1570,0	570	550	143	675	200	120	210	127,2	32	32	20	360	260	150	1150	950	400	300	-	33	20	130	60	362	914	360	2150	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Pump										Flanged spacer		Shaft stub				Pump feet																		Clearance for removal	[kg] Ⓟ	Comment
				DN_1	DN_2	a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	lw	t	u	g_1	g_2	m_1	m_2	m_3	n_1	n_2	n_3	n_4	n_5	s_1	s_2	i	i_1	v	w	x		
400-500	K	S06	12	400	400	297	250	41	1056	670	832	1353,0	480	770	200	900	200	75	195	79,7	20	40	18	400	300	80	1150	950	215	140	-	33	18	150	33	265	791	440	1400	-
400-500	K	S07	12	400	400	297	250	41	1202	670	832	1499,0	480	770	200	900	200	95	220	100,2	25	40	18	400	300	80	1150	950	350	270	-	33	18	150	33	300	902	440	1470	-
400-632	K	S08	12	500	400	342	250	38	1211	670	997	1553,0	510	790	200	945	200	110	220	116,2	28	40	18	400	300	80	1150	980	350	270	-	39	18	150	39	300	911	440	1710	-
400-710	K	S09	12	400	400	350	250	38	1309	750	1000	1659,0	675	750	150	950	200	120	210	127,2	32	40	20	400	300	150	1180	950	400	300	-	35	20	150	60	362	948	415	2815	◎
400-713	K	S09	12	400	400	350	250	38	1309	750	1000	1659,0	675	750	150	950	200	120	210	127,2	32	40	20	400	300	150	1180	950	400	300	-	35	20	150	60	362	948	415	2815	◎
400-900	K	S09	12	500	400	350	400	38	1242	750	1000	1592,0	600	750	150	950	200	120	210	127,2	32	40	20	400	300	150	1150	950	400	300	-	35	20	150	60	362	880	355	2050	-
500-632	K	S08	12	500	500	352	250	43	1221	750	997	1573,0	640	815	200	955	200	110	220	116,2	28	40	16	400	300	80	1150	950	350	270	-	39	18	150	39	285	936	350	2520	◎
500-634	K	S07	12	500	500	352	250	43	1221	750	997	1573,0	640	815	200	955	200	95	220	100,2	25	40	16	400	300	80	1150	950	350	270	-	39	18	150	39	285	936	400	2150	◎
500-634	K	S08	12	500	500	352	250	43	1221	750	997	1573,0	640	815	200	955	200	110	220	116,2	28	40	16	400	300	80	1150	950	350	270	-	39	18	150	39	285	936	400	2520	◎
500-710	K	S09	12	500	500	336	250	43	1314	850	1150	1650,0	850	700	200	936	200	120	210	127,2	32	40	20	400	300	150	1400	1050	400	300	-	39	20	150	60	362	1098	440	3435	◎
500-900	K	S09	12	500	500	400	250	44	1292	950	1200	1692,0	740	940	200	1000	200	120	210	127,2	32	40	20	400	300	150	1600	1350	400	300	-	39	20	150	60	362	926	490	4050	◎
500-900	K	S10	12	500	500	400	250	44	1683	950	1200	2083,0	740	940	200	1000	200	145	280	153,3	36	40	20	400	300	150	1600	1350	400	300	-	39	20	150	60	484	1198	490	4450	◎
600-520	K	S07	12	500	600	397	250	36	1372	800	1057	1769,0	605	960	200	1000	200	95	220	100,2	25	40	18	400	300	80	1400	1290	350	270	1050	38	18	150	38	285	1097	450	2340	-
600-710	K	S08	12	600	600	490	250	48	1247	900	1182	1737,0	750	945	200	1090	200	110	220	116,2	28	40	18	400	300	80	1600	1350	350	270	-	39	18	150	39	285	962	510	3100	◎
600-900	K	S10	12	700	600	438	310	48	1698	1100	1350	2135,5	805	1145	200	1138	200	145	280	153,3	36	45	20	400	300	150	1915	1600	400	300	-	39	20	180	60	484	1214	470	5200	◎
700-902	K	S08	12	750	750	490	300	50	1287	1100	1720	1777,0	1150	995	200	1090	200	110	220	116,2	28	45	18	450	250	80	1900	1600	350	270	-	39	18	125	39	280	1007	465	3600	◎
700-902	K	S09	12	750	750	490	300	50	1371	1100	1720	1861	1150	995	200	1090	200	120	210	127,2	32	45	20	400	300	150	1900	1600	400	300	-	39	20	150	60	362	1010	465	5120	◎

Installation type 3EN

Table 5: Installation type 3EN [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
50-215	F	S01	13	65	50	182 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	28,6	69,9	358,6	175	Ⓝ
50-215	F	S01	13	65	50	184 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	28,6	69,9	383,6	182	Ⓝ
50-215	F	S01	13	65	50	213 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	34,9	85,9	454,3	195	Ⓝ
50-215	F	S01	13	65	50	215 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	34,9	85,9	482,3	210	Ⓝ
50-215	F	S01	13	65	50	254 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	41,3	101,6	566,3	250	Ⓝ
50-215	F	S01	13	65	50	256 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	41,3	101,6	612,3	270	Ⓝ
50-216	F	S01	13	65	50	182 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	28,6	69,9	358,6	175	Ⓝ
50-216	F	S01	13	65	50	184 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	28,6	69,9	383,6	182	Ⓝ
50-216	F	S01	13	65	50	213 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	34,9	85,9	454,3	195	Ⓝ
50-216	F	S01	13	65	50	215 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	34,9	85,9	482,3	210	Ⓝ
50-216	F	S01	13	65	50	254 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	41,3	101,6	566,3	250	Ⓝ
50-216	F	S01	13	65	50	256 T	11A1	97	65	20	494,5	170	222	597,5	135	150	-	302	80	32	270	200	41,3	101,6	612,3	270	Ⓝ
50-250	K	S01	13	65	50	182 T	11A1	97	65	20	493	170	222	596	155	155	-	302	80	32	270	200	28,6	69,9	358,6	177	Ⓝ
50-250	K	S01	13	65	50	184 T	11A1	97	65	20	493	170	222	596	155	155	-	302	80	32	270	200	28,6	69,9	383,6	184	Ⓝ
50-250	K	S01	13	65	50	213 T	11A1	97	65	20	493	170	222	596	155	155	-	302	80	32	270	200	34,9	85,9	454,3	197	Ⓝ
50-250	K	S01	13	65	50	215 T	11A1	97	65	20	493	170	222	596	155	155	-	302	80	32	270	200	34,9	85,9	482,3	212	Ⓝ
50-251	K	S02	13	65	50	182 T	11A1	97	65	20	493	170	222	596	155	155	-	302	80	48	270	200	28,6	69,9	358,6	179	Ⓝ
50-251	K	S02	13	65	50	184 T	11A1	97	65	20	493	170	222	596	155	155	-	302	80	48	270	200	28,6	69,9	383,6	186	Ⓝ
50-251	K	S02	13	65	50	213 T	11A1	97	65	20	493	170	222	596	155	155	-	302	80	48	270	200	34,9	85,9	454,3	199	Ⓝ
50-251	K	S02	13	65	50	215 T	11A1	97	65	20	493	170	222	596	155	155	-	302	80	48	270	200	34,9	85,9	482,3	214	Ⓝ
65-215	F	S01	13	80	65	182 T	11A1	97	65	20	514	225	237	616,5	130	155	-	362	80	32	325	178	28,6	69,9	358,6	181	Ⓝ
65-215	F	S01	13	80	65	184 T	11A1	97	65	20	514	225	237	616,5	130	155	-	362	80	32	325	178	28,6	69,9	383,6	188	Ⓝ
65-215	F	S01	13	80	65	213 T	11A1	97	65	20	514	225	237	616,5	130	155	-	362	80	32	325	178	34,9	85,9	454,3	201	Ⓝ
65-215	F	S01	13	80	65	215 T	11A1	97	65	20	514	225	237	616,5	130	155	-	362	80	32	325	178	34,9	85,9	482,3	216	Ⓝ
65-215	F	S01	13	80	65	254 T	11A1	97	65	20	514	225	237	616,5	130	155	-	362	80	32	325	178	41,3	101,6	566,3	256	Ⓝ
65-215	F	S01	13	80	65	256 T	11A1	97	65	20	514	225	237	616,5	130	155	-	362	80	32	325	178	41,3	101,6	612,3	276	Ⓝ
65-216	E	S02	13	80	65	182 T	11A1	97	65	22	511	225	237	614,3	155	190	-	362	80	48	325	180	28,6	69,9	358,6	193	Ⓝ
65-216	E	S02	13	80	65	184 T	11A1	97	65	22	511	225	237	614,3	155	190	-	362	80	48	325	180	28,6	69,9	383,6	200	Ⓝ
65-216	E	S02	13	80	65	213 T	11A1	97	65	22	511	225	237	614,3	155	190	-	362	80	48	325	180	34,9	85,9	454,3	213	Ⓝ
65-216	E	S02	13	80	65	215 T	11A1	97	65	22	511	225	237	614,3	155	190	-	362	80	48	325	180	34,9	85,9	482,3	228	Ⓝ
65-216	E	S02	13	80	65	254 T	11A1	97	65	22	511	225	237	614,3	155	190	-	362	80	48	325	180	41,3	101,6	566,3	268	Ⓝ
65-216	E	S02	13	80	65	256 T	11A1	97	65	22	511	225	237	614,3	155	190	-	362	80	48	325	180	41,3	101,6	612,3	288	Ⓝ
65-217	F	S01	13	80	65	182 T	11A1	97	65	20	493	225	237	595,5	130	155	-	362	80	32	325	200	28,6	69,9	358,6	181	Ⓝ
65-217	F	S01	13	80	65	184 T	11A1	97	65	20	493	225	237	595,5	130	155	-	362	80	32	325	200	28,6	69,9	383,6	188	Ⓝ
65-217	F	S01	13	80	65	213 T	11A1	97	65	20	493	225	237	595,5	130	155	-	362	80	32	325	200	34,9	85,9	454,3	201	Ⓝ
65-217	F	S01	13	80	65	215 T	11A1	97	65	20	493	225	237	595,5	130	155	-	362	80	32	325	200	34,9	85,9	482,3	216	Ⓝ
65-217	F	S01	13	80	65	254 T	11A1	97	65	20	493	225	237	595,5	130	155	-	362	80	32	325	200	41,3	101,6	566,3	256	Ⓝ
65-217	F	S01	13	80	65	256 T	11A1	97	65	20	493	225	237	595,5	130	155	-	362	80	32	325	200	41,3	101,6	612,3	276	Ⓝ
65-250	K	S01	13	80	65	182 T	11A1	97	65	20	515	225	237	618	160	200	-	302	80	32	325	178	28,6	69,9	358,6	189	Ⓝ
65-250	K	S01	13	80	65	184 T	11A1	97	65	20	515	225	237	618	160	200	-	302	80	32	325	178	28,6	69,9	383,6	196	Ⓝ
65-250	K	S01	13	80	65	213 T	11A1	97	65	20	515	225	237	618	160	200	-	302	80	32	325	178	34,9	85,9	454,3	209	Ⓝ

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
65-250	K	S01	13	80	65	215 T	11A1	97	65	20	515	225	237	618	160	200	-	302	80	32	325	178	34,9	85,9	482,3	224	Ⓝ
80-216	F	S01	13	100	80	182 T	11A1	123	65	22	527	225	247	655,5	130	165	-	377	120	32	325	164,5	28,6	69,9	358,6	195	Ⓝ
80-216	F	S01	13	100	80	184 T	11A1	123	65	22	527	225	247	655,5	130	165	-	377	120	32	325	164,5	28,6	69,9	383,6	202	Ⓝ
80-216	F	S01	13	100	80	213 T	11A1	123	65	22	527	225	247	655,5	130	165	-	377	120	32	325	164,5	34,9	85,9	454,3	215	Ⓝ
80-216	F	S01	13	100	80	215 T	11A1	123	65	22	527	225	247	655,5	130	165	-	377	120	32	325	164,5	34,9	85,9	482,3	230	Ⓝ
80-216	E	S02	13	100	80	182 T	11A1	123	65	22	519	225	247	647,8	165	200	-	377	120	48	325	191	28,6	69,9	358,6	204	Ⓝ
80-216	E	S02	13	100	80	184 T	11A1	123	65	22	519	225	247	647,8	165	200	-	377	120	48	325	191	28,6	69,9	383,6	211	Ⓝ
80-216	E	S02	13	100	80	213 T	11A1	123	65	22	519	225	247	647,8	165	200	-	377	120	48	325	191	34,9	85,9	454,3	224	Ⓝ
80-216	E	S02	13	100	80	215 T	11A1	123	65	22	519	225	247	647,8	165	200	-	377	120	48	325	191	34,9	85,9	482,3	239	Ⓝ
80-216	E	S02	13	100	80	254 T	11A1	123	65	22	519	225	247	647,8	165	200	-	377	120	48	325	191	41,3	101,6	566,3	279	Ⓝ
80-216	E	S02	13	100	80	256 T	11A1	123	65	22	519	225	247	647,8	165	200	-	377	120	48	325	191	41,3	101,6	612,3	299	Ⓝ
80-216	E	S02	13	100	80	284 T	11A1	123	65	22	519	225	247	647,8	165	200	-	377	120	48	325	191	47,6	117,6	731,3	338	Ⓝ
80-217	F	S01	13	100	80	182 T	11A1	123	65	22	499	225	247	627,5	151	151	-	377	120	32	325	192,5	28,6	69,9	358,6	179	Ⓝ
80-217	F	S01	13	100	80	184 T	11A1	123	65	22	499	225	247	627,5	151	151	-	377	120	32	325	192,5	28,6	69,9	383,6	186	Ⓝ
80-217	F	S01	13	100	80	213 T	11A1	123	65	22	499	225	247	627,5	151	151	-	377	120	32	325	192,5	34,9	85,9	454,3	199	Ⓝ
80-217	F	S01	13	100	80	215 T	11A1	123	65	22	499	225	247	627,5	151	151	-	377	120	32	325	192,5	34,9	85,9	482,3	214	Ⓝ
80-217	F	S01	13	100	80	254 T	11A1	123	65	22	499	225	247	627,5	151	151	-	377	120	32	325	192,5	41,3	101,6	566,3	254	Ⓝ
80-217	F	S01	13	100	80	256 T	11A1	123	65	22	499	225	247	627,5	151	151	-	377	120	32	325	192,5	41,3	101,6	612,3	290	Ⓝ
80-217	F	S01	13	100	80	284 T	11A1	123	65	22	499	225	247	627,5	151	151	-	377	120	32	325	192,5	47,6	117,6	731,3	329	Ⓝ
80-250	K	S01	13	100	80	182 T	11A1	107	65	20	517	225	247	630	160	175	-	362	120	32	100	178	28,6	69,9	358,6	103	Ⓝ
80-250	K	S01	13	100	80	184 T	11A1	107	65	20	517	225	247	630	160	175	-	362	120	32	100	178	28,6	69,9	383,6	110	Ⓝ
80-250	K	S01	13	100	80	213 T	11A1	107	65	20	517	225	247	630	160	175	-	362	120	32	100	178	34,9	85,9	454,3	123	Ⓝ
80-250	K	S01	13	100	80	215 T	11A1	107	65	20	517	225	247	630	160	175	-	362	120	32	100	178	34,9	85,9	482,3	138	Ⓝ
80-252	F	S01	13	100	80	182 T	11A1	107	65	20	517	225	247	630	160	175	-	362	120	32	325	178	28,6	69,9	358,6	193	Ⓝ
80-252	F	S01	13	100	80	184 T	11A1	107	65	20	517	225	247	630	160	175	-	362	120	32	325	178	28,6	69,9	383,6	200	Ⓝ
80-252	F	S01	13	100	80	213 T	11A1	107	65	20	517	225	247	630	160	175	-	362	120	32	325	178	34,9	85,9	454,3	213	Ⓝ
80-252	F	S01	13	100	80	215 T	11A1	107	65	20	517	225	247	630	160	175	-	362	120	32	325	178	34,9	85,9	482,3	228	Ⓝ
80-253	F	S02	13	100	80	182 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	28,6	69,9	358,6	218	Ⓝ
80-253	F	S02	13	100	80	184 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	28,6	69,9	383,6	225	Ⓝ
80-253	F	S02	13	100	80	213 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	105,0	34,9	85,9	454,3	238	Ⓝ
80-253	F	S02	13	100	80	215 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	105,0	34,9	85,9	482,3	253	Ⓝ
80-253	F	S02	13	100	80	254 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	105,0	41,3	101,6	566,3	293	Ⓝ
80-253	F	S02	13	100	80	256 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	105,0	41,3	101,6	612,3	313	Ⓝ
80-253	F	S02	13	100	80	284 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	105,0	47,6	117,6	731,3	352	Ⓝ
80-253	F	S02	13	100	80	286 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	105,0	47,6	117,6	731,3	383	Ⓝ
80-253	E	S02	13	100	80	182 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	28,6	69,9	358,6	228	Ⓝ
80-253	E	S02	13	100	80	184 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	28,6	69,9	383,6	235	Ⓝ
80-253	E	S02	13	100	80	213 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	34,9	85,9	454,3	248	Ⓝ
80-253	E	S02	13	100	80	215 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	34,9	85,9	482,3	263	Ⓝ
80-253	E	S02	13	100	80	254 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	41,3	101,6	566,3	303	Ⓝ
80-253	E	S02	13	100	80	256 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	41,3	101,6	612,3	323	Ⓝ
80-253	E	S02	13	100	80	284 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	47,6	117,6	731,3	362	Ⓝ
80-253	E	S02	13	100	80	286 T	11A1	121	65	20	531	225	247	658	160	175	-	362	120	48	325	178,0	47,6	117,6	731,3	393	Ⓝ
80-315	K	S03	13	100	80	213 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	34,9	85,9	454,3	271	Ⓝ

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
80-315	K	S03	13	100	80	215 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	34,9	85,9	482,3	286	Ⓝ
80-315	K	S03	13	100	80	254 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	41,3	101,6	566,3	326	Ⓝ
80-315	K	S03	13	100	80	256 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	41,3	101,6	612,3	346	Ⓝ
80-315	K	S03	13	100	80	284 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	47,6	117,6	731,3	385	Ⓝ
80-315	K	S03	13	100	80	286 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	47,6	117,6	731,3	416	Ⓝ
80-317	F	S03	13	100	80	213 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	34,9	85,9	454,3	271	Ⓝ
80-317	F	S03	13	100	80	215 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	34,9	85,9	482,3	286	Ⓝ
80-317	F	S03	13	100	80	254 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	41,3	101,6	566,3	326	Ⓝ
80-317	F	S03	13	100	80	256 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	41,3	101,6	612,3	346	Ⓝ
80-317	F	S03	13	100	80	284 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	47,6	117,6	731,3	385	Ⓝ
80-317	F	S03	13	100	80	286 T	11A1	107	80	20	595	225	247	708	180	180	-	362	120	60	325	102	47,6	117,6	731,3	416	Ⓝ
80-315	D	S03	13	100	80	215 T	12A1	187	90	22	593	280	257	786	180	205	-	442	120	60	380	165	34,9	85,9	482,3	338	Ⓝ
80-315	D	S03	13	100	80	254 T	12A1	187	90	22	593	280	257	786	180	205	-	442	120	60	380	165	41,3	101,6	566,3	378	Ⓝ
80-315	D	S03	13	100	80	256 T	12A1	187	90	22	593	280	257	786	180	205	-	442	120	60	380	165	41,3	101,6	612,3	398	Ⓝ
80-315	D	S03	13	100	80	284 T	12A1	187	90	22	593	280	257	786	180	205	-	442	120	60	380	165	47,6	117,6	731,3	437	Ⓝ
80-316	D	S03	13	125	80	215 T	12A1	207	70	22	593	280	297	806	195	225	-	462	120	60	380	185	34,9	85,9	482,3	338	Ⓝ
80-316	D	S03	13	125	80	254 T	12A1	207	70	22	593	280	297	806	195	225	-	462	120	60	380	185	41,3	101,6	566,3	378	Ⓝ
80-316	D	S03	13	125	80	256 T	12A1	207	70	22	593	280	297	806	195	225	-	462	120	60	380	185	41,3	101,6	612,3	398	Ⓝ
80-316	D	S03	13	125	80	284 T	12A1	207	70	22	593	280	297	806	195	225	-	462	120	60	380	185	47,6	117,6	731,3	437	Ⓝ
80-317	D	S03	13	100	80	213 T	12A1	172	90	22	599	280	257	777	181	201	-	442	120	60	380	142	34,9	85,9	454,3	325	Ⓝ
80-317	D	S03	13	100	80	215 T	12A1	172	90	22	599	280	257	777	181	201	-	442	120	60	380	142	34,9	85,9	482,3	340	Ⓝ
80-317	D	S03	13	100	80	254 T	12A1	172	90	22	599	280	257	777	181	201	-	442	120	60	380	142	41,3	101,6	566,3	380	Ⓝ
100-215	F	S01	13	100	100	182 T	11A2	137	80	27	536	225	277	678,5	205	240	100	392	120	32	325	155,5	28,6	69,9	358,6	207	-
100-215	F	S01	13	100	100	184 T	11A2	137	80	27	536	225	277	678,5	205	240	100	392	120	32	325	155,5	28,6	69,9	383,6	214	-
100-215	F	S01	13	100	100	213 T	11A2	137	80	27	536	225	277	678,5	205	240	100	392	120	32	325	155,5	34,9	85,9	454,3	227	-
100-215	F	S01	13	100	100	215 T	11A2	137	80	27	536	225	277	678,5	205	240	100	392	120	32	325	155,5	34,9	85,9	482,3	242	-
100-250	E	S01	13	100	100	213 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	34,9	85,9	454,3	219	-
100-250	E	S01	13	100	100	215 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	34,9	85,9	482,3	234	-
100-251	F	S02	13	100	100	213 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	34,9	85,9	454,3	226	-
100-251	F	S02	13	100	100	215 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	34,9	85,9	482,3	241	-
100-251	F	S02	13	100	100	254 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	41,3	101,6	566,3	281	-
100-251	F	S02	13	100	100	256 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	41,3	101,6	612,3	301	-
100-251	F	S02	13	100	100	284 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	47,6	117,6	731,3	340	-
100-251	F	S02	13	100	100	286 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	47,6	117,6	731,3	371	-
100-252	F	S01	13	100	100	213 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	34,9	85,9	454,3	219	-
100-252	F	S01	13	100	100	215 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	34,9	85,9	482,3	234	-
100-253	F	S02	13	100	100	213 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	34,9	85,9	454,3	226	-
100-253	F	S02	13	100	100	215 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	34,9	85,9	482,3	241	-
100-253	F	S02	13	100	100	254 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	41,3	101,6	566,3	281	-
100-253	F	S02	13	100	100	256 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	41,3	101,6	612,3	301	-
100-253	F	S02	13	100	100	284 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	47,6	117,6	731,3	340	-
100-253	F	S02	13	100	100	286 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	48	325	163	47,6	117,6	731,3	371	-
100-253	K	S02	13	100	100	213 T	11A1	137	80	27	533	225	277	675,8	205	282	90	392	120	48	325	163	34,9	85,9	454,3	242	-
100-253	K	S02	13	100	100	215 T	11A1	137	80	27	533	225	277	675,8	205	282	90	392	120	48	325	163	34,9	85,9	482,3	257	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
100-253	K	S02	13	100	100	254 T	11A1	137	80	27	533	225	277	675,8	205	282	90	392	120	48	325	163	41,3	101,6	566,3	297	-
100-253	K	S02	13	100	100	256 T	11A1	137	80	27	533	225	277	675,8	205	282	90	392	120	48	325	163	41,3	101,6	612,3	317	-
100-253	K	S02	13	100	100	284 T	11A1	137	80	27	533	225	277	675,8	205	282	90	392	120	48	325	163	47,6	117,6	731,3	372	-
100-253	K	S02	13	100	100	286 T	11A1	137	80	27	533	225	277	675,8	205	282	90	392	120	48	325	163	47,6	117,6	731,3	403	-
100-253	D	S02	13	150	100	213 T	12A1	202	70	27	531	280	380	739	205	330	100	457	150	48	380	227	34,9	85,9	454,3	324	-
100-253	D	S02	13	150	100	215 T	12A1	202	70	27	531	280	380	739	205	330	100	457	150	48	380	227	34,9	85,9	482,3	339	-
100-253	D	S02	13	150	100	254 T	12A1	202	70	27	531	280	380	739	205	330	100	457	150	48	380	227	41,3	101,6	566,3	379	-
100-253	D	S02	13	150	100	256 T	12A1	202	70	27	531	280	380	739	205	330	100	457	150	48	380	227	41,3	101,6	612,3	399	-
100-253	E	S02	13	100	100	213 T	11A1	137	80	27	533	225	277	675,8	205	285	90	392	120	48	325	163	34,9	85,9	454,3	241	-
100-253	E	S02	13	100	100	215 T	11A1	137	80	27	533	225	277	675,8	205	285	90	392	120	48	325	163	34,9	85,9	482,3	256	-
100-253	E	S02	13	100	100	254 T	11A1	137	80	27	533	225	277	675,8	205	285	90	392	120	48	325	163	41,3	101,6	566,3	312	-
100-253	E	S02	13	100	100	256 T	11A1	137	80	27	533	225	277	675,8	205	285	90	392	120	48	325	163	41,3	101,6	612,3	332	-
100-253	E	S02	13	100	100	284 T	11A1	137	80	27	533	225	277	675,8	205	285	90	392	120	48	325	163	47,6	117,6	731,3	371	-
100-253	E	S02	13	100	100	286 T	11A1	137	80	27	533	225	277	675,8	205	285	90	392	120	48	325	163	47,6	117,6	731,3	402	-
100-254	F	S01	13	100	100	213 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	34,9	85,9	454,3	219	-
100-254	F	S01	13	100	100	215 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	34,9	85,9	482,3	234	-
100-254	K	S01	13	100	100	213 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	34,9	85,9	454,3	219	-
100-254	K	S01	13	100	100	215 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	34,9	85,9	482,3	234	-
100-254	K	S01	13	100	100	254 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	41,3	101,6	566,3	274	-
100-254	K	S01	13	100	100	256 T	11A1	137	80	27	530	225	277	673	180	280	118	392	120	32	325	163	41,3	101,6	612,3	294	-
100-316	F	S03	13	150	100	213 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	34,9	85,9	454,3	298	-
100-316	F	S03	13	150	100	215 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	34,9	85,9	482,3	313	-
100-316	F	S03	13	150	100	254 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	41,3	101,6	566,3	353	-
100-316	F	S03	13	150	100	256 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	41,3	101,6	612,3	373	-
100-316	F	S03	13	150	100	284 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	47,6	117,6	731,3	428	-
100-316	F	S03	13	150	100	286 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	47,6	117,6	731,3	459	-
100-316	F	S03	13	150	100	324 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	54	133,4	812,5	512	-
100-316	F	S03	13	150	100	326 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	54	133,4	812,5	528	-
100-316	K	S03	13	150	100	213 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	34,9	85,9	454,3	298	-
100-316	K	S03	13	150	100	215 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	34,9	85,9	482,3	313	-
100-316	K	S03	13	150	100	254 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	41,3	101,6	566,3	353	-
100-316	K	S03	13	150	100	256 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	41,3	101,6	612,3	373	-
100-316	K	S03	13	150	100	284 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	47,6	117,6	731,3	428	-
100-316	K	S03	13	150	100	286 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	47,6	117,6	731,3	459	-
100-316	K	S03	13	150	100	324 T	11A1	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	54	133,4	812,5	512	-
100-316	K	S03	13	150	100	326 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	54	133,4	812,5	528	-
100-316	D	S03	13	150	100	254 T	12A1	237	70	27	605	280	337	848	210	305	100	492	150	60	380	156	41,3	101,6	566,3	414	-
100-316	D	S03	13	150	100	256 T	12A1	237	70	27	605	280	337	848	210	305	100	492	150	60	380	156	41,3	101,6	612,3	434	-
100-316	D	S03	13	150	100	284 T	12A1	237	70	27	605	280	337	848	210	305	100	492	150	60	380	156	47,6	117,6	731,3	473	-
100-316	D	S03	13	150	100	286 T	12A1	237	70	27	605	280	337	848	210	305	100	492	150	60	380	156	47,6	117,6	731,3	504	-
100-317	E	S03	13	125	100	213 T	11A1	137	80	27	617	225	322	759,5	205	290	85	392	120	60	325	80	34,9	85,9	454,3	298	-
100-317	E	S03	13	125	100	215 T	11A1	137	80	27	617	225	322	759,5	205	290	85	392	120	60	325	80	34,9	85,9	482,3	313	-
100-317	E	S03	13	125	100	254 T	11A1	137	80	27	617	225	322	759,5	205	290	85	392	120	60	325	80	41,3	101,6	566,3	353	-
100-317	E	S03	13	125	100	256 T	11A1	137	80	27	617	225	322	759,5	205	290	85	392	120	60	325	80	41,3	101,6	612,3	373	-
100-317	E	S03	13	125	100	284 T	11A1	137	80	27	617	225	322	759,5	205	290	85	392	120	60	325	80	47,6	117,6	731,3	428	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
100-317	E	S03	13	125	100	286 T	11A1	137	80	27	617	225	322	759,5	205	290	85	392	120	60	325	80	47,6	117,6	731,3	459	-
100-317	E	S03	13	125	100	324 T	11A1	137	80	27	617	225	322	759,5	205	290	85	392	120	60	325	80	54	133,4	812,5	512	-
100-317	E	S03	13	125	100	326 T	12A2	137	80	27	617	225	322	759,5	205	290	85	392	120	60	325	80	54	133,4	812,5	528	-
150-253	D	S02	13	150	150	215 T	12A1	163	150	29	574	280	397	742,5	219	340	120	418	150	48	380	195,0	34,9	85,9	482,3	317	-
150-253	D	S02	13	150	150	254 T	12A1	163	150	29	574	280	397	742,5	219	340	120	418	150	48	380	195,0	41,3	101,6	566,3	357	-
150-253	D	S02	13	150	150	256 T	12A1	163	150	29	574	280	397	742,5	219	340	120	418	150	48	380	195,0	41,3	101,6	612,3	377	-
150-315	F	S03	13	150	150	213 T	12A1	163	100	29	641	280	397	810	250	345	118	418	150	60	380	117	34,9	85,9	454,3	319	-
150-315	F	S03	13	150	150	215 T	12A1	163	100	29	641	280	397	810	250	345	118	418	150	60	380	117	34,9	85,9	482,3	334	-
150-315	F	S03	13	150	150	254 T	12A1	163	100	29	641	280	397	810	250	345	118	418	150	60	380	117	41,3	101,6	566,3	374	-
150-315	F	S03	13	150	150	256 T	12A1	163	100	29	641	280	397	810	250	345	118	418	150	60	380	117	41,3	101,6	612,3	394	-
150-315	F	S03	13	150	150	284 T	12A1	163	100	29	641	280	397	810	250	345	118	418	150	60	380	117	47,6	117,6	731,3	433	-
150-315	F	S03	13	150	150	286 T	12A1	163	100	29	641	280	397	810	250	345	118	418	150	60	380	117	47,6	117,6	731,3	464	-
150-315	F	S03	13	150	150	324 T	12A1	163	100	29	641	280	397	810	250	345	118	418	150	60	380	117	54	133,4	812,5	517	-
150-315	F	S03	13	150	150	326 T	12A1	163	100	29	641	280	397	810	250	345	118	418	150	60	380	117	54	133,4	812,5	533	-
150-315	D	S03	13	150	150	254 T	12A1	217	150	29	617	315	397	840	250	385	120	472	150	60	415	142	41,3	101,6	566,3	444	-
150-315	D	S03	13	150	150	256 T	12A1	217	150	29	617	315	397	840	250	385	120	472	150	60	415	142	41,3	101,6	612,3	464	-
150-315	D	S03	13	150	150	284 T	12A1	217	150	29	617	315	397	840	250	385	120	472	150	60	415	142	47,6	117,6	731,3	503	-
150-315	D	S03	13	150	150	286 T	12A1	217	150	29	617	315	397	840	250	385	120	472	150	60	415	142	47,6	117,6	731,3	534	-
150-317	E	S03	13	150	150	213 T	12A1	163	100	29	641	280	367	810	250	345	118	418	150	60	380	117	34,9	85,9	454,3	319	-
150-317	E	S03	13	150	150	215 T	12A1	163	100	29	641	280	367	810	250	345	118	418	150	60	380	117	34,9	85,9	482,3	334	-
150-317	E	S03	13	150	150	254 T	12A1	163	100	29	641	280	367	810	250	345	118	418	150	60	380	117	41,3	101,6	566,3	374	-
150-317	E	S03	13	150	150	256 T	12A1	163	100	29	641	280	367	810	250	345	118	418	150	60	380	117	41,3	101,6	612,3	394	-
150-317	E	S03	13	150	150	284 T	12A1	163	100	29	641	280	367	810	250	345	118	418	150	60	380	117	47,6	117,6	731,3	433	-
150-317	E	S03	13	150	150	286 T	12A1	163	100	29	641	280	367	810	250	345	118	418	150	60	380	117	47,6	117,6	731,3	464	-
150-317	E	S03	13	150	150	324 T	12A1	163	100	29	641	280	367	810	250	345	118	418	150	60	380	117	54	133,4	812,5	517	-
150-317	E	S03	13	150	150	326 T	12A1	163	100	29	641	280	367	810	250	345	118	418	150	60	380	117	54	133,4	812,5	533	-
150-317	K	S03	13	150	150	213 T	12A1	97	100	29	618	280	367	720,5	250	350	100	352	150	60	380	142	34,9	85,9	454,3	336	-
150-317	K	S03	13	150	150	215 T	12A1	97	100	29	618	280	367	720,5	250	350	100	352	150	60	380	142	34,9	85,9	482,3	351	-
150-317	K	S03	13	150	150	254 T	12A1	97	100	29	618	280	367	720,5	250	350	100	352	150	60	380	142	41,3	101,6	566,3	391	-
150-317	K	S03	13	150	150	256 T	12A1	97	100	29	618	280	367	720,5	250	350	100	352	150	60	380	142	41,3	101,6	612,3	411	-
150-317	K	S03	13	150	150	284 T	12A1	97	100	29	618	280	367	720,5	250	350	100	352	150	60	380	142	47,6	117,6	731,3	450	-
150-317	K	S03	13	150	150	286 T	12A1	97	100	29	618	280	367	720,5	250	350	100	352	150	60	380	142	47,6	117,6	731,3	481	-
150-317	K	S03	13	150	150	324 T	12A1	97	100	29	618	280	367	720,5	250	350	100	352	150	60	380	142	54	133,4	812,5	534	-
150-317	K	S03	13	150	150	326 T	12A1	97	100	29	618	280	367	720,5	250	350	100	352	150	60	380	142	54	133,4	812,5	550	-
150-317	K	S05	13	150	150	364 T	61	97	100	29	741	280	367	843,7	250	350	100	352	150	60	423	178	60,3	142,7	869	855	-
150-317	K	S05	13	150	150	365 T	61	97	100	29	741	280	367	843,7	250	350	100	352	150	60	423	178	60,3	142,7	869	855	-
150-317	D	S03	13	200	150	213 T	12A1	97	100	29	618	280	367	720,5	250	350	100	452	200	60	380	142	34,9	85,9	454,3	336	-
150-317	D	S03	13	200	150	215 T	12A1	97	100	29	618	280	367	720,5	250	350	100	452	200	60	380	142	34,9	85,9	482,3	351	-
150-317	D	S03	13	200	150	254 T	12A1	97	100	29	618	280	367	720,5	250	350	100	452	200	60	380	142	41,3	101,6	566,3	391	-
150-317	D	S03	13	200	150	256 T	12A1	97	100	29	618	280	367	720,5	250	350	100	452	200	60	380	142	41,3	101,6	612,3	411	-
150-317	D	S03	13	200	150	284 T	12A1	97	100	29	618	280	367	720,5	250	350	100	452	200	60	380	142	47,6	117,6	731,3	450	-
150-317	D	S03	13	200	150	286 T	12A1	97	100	29	618	280	367	720,5	250	350	100	452	200	60	380	142	47,6	117,6	731,3	481	-
150-317	D	S03	13	200	150	324 T	12A1	97	100	29	618	280	367	720,5	250	350	100	452	200	60	380	142	54	133,4	812,5	534	-
150-317	D	S03	13	200	150	326 T	12A1	97	100	29	618	280	367	720,5	250	350	100	452	200	60	380	142	54	133,4	812,5	550	-
200-315	K	S03	13	200	200	254 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	41,3	101,6	566,3	426	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-315	K	S03	13	200	200	256 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	41,3	101,6	612,3	446	-
200-315	K	S03	13	200	200	284 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	47,6	117,6	731,3	485	-
200-315	K	S03	13	200	200	286 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	47,6	117,6	731,3	516	-
200-315	K	S03	13	200	200	324 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	54	133,4	812,5	569	-
200-315	K	S03	13	200	200	326 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	54	133,4	812,5	585	-
200-315	D	S03	13	200	200	254 T	13A1	220	185	30	666	375	497	892	290	450	143	572	200	60	475	92	41,3	101,6	566,3	502	-
200-315	D	S03	13	200	200	256 T	13A1	220	185	30	666	375	497	892	290	450	143	572	200	60	475	92	41,3	101,6	612,3	522	-
200-315	D	S03	13	200	200	284 T	13A1	220	185	30	666	375	497	892	290	450	143	572	200	60	475	92	47,6	117,6	731,3	561	-
200-315	D	S03	13	200	200	286 T	13A1	220	185	30	666	375	497	892	290	450	143	572	200	60	475	92	47,6	117,6	731,3	592	-
200-315	D	S03	13	200	200	324 T	13A1	220	185	30	666	375	497	892	290	450	143	572	200	60	475	92	54	133,4	812,5	645	-
200-316	K	S03	13	200	200	254 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	41,3	101,6	566,3	426	-
200-316	K	S03	13	200	200	256 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	41,3	101,6	612,3	446	-
200-316	K	S03	13	200	200	284 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	47,6	117,6	731,3	485	-
200-316	K	S03	13	200	200	286 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	47,6	117,6	731,3	516	-
200-316	K	S03	13	200	200	324 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	54	133,4	812,5	569	-
200-316	K	S03	13	200	200	326 T	12A1	180	100	30	620	315	447	806	240	435	118	532	200	60	415	142	54	133,4	812,5	585	-
200-317	K	S03	13	200	200	213 T	12A1	147	100	29	616	315	447	768,5	260	410	118	502	200	60	415	147	34,9	85,9	454,3	388	-
200-317	K	S03	13	200	200	215 T	12A1	147	100	29	616	315	447	768,5	260	410	118	502	200	60	415	147	34,9	85,9	482,3	403	-
200-317	K	S03	13	200	200	254 T	12A1	147	100	29	616	315	447	768,5	260	410	118	502	200	60	415	147	41,3	101,6	566,3	443	-
200-317	K	S03	13	200	200	256 T	12A1	147	100	29	616	315	447	768,5	260	410	118	502	200	60	415	147	41,3	101,6	612,3	463	-
200-317	K	S03	13	200	200	284 T	12A1	147	100	29	616	315	447	768,5	260	410	118	502	200	60	415	147	47,6	117,6	731,3	502	-
200-317	K	S03	13	200	200	286 T	12A1	147	100	29	616	315	447	768,5	260	410	118	502	200	60	415	147	47,6	117,6	731,3	533	-
200-317	K	S03	13	200	200	324 T	12A1	147	100	29	616	315	447	768,5	260	410	118	502	200	60	415	147	54	133,4	812,5	586	-
200-317	K	S03	13	200	200	326 T	12A1	147	100	29	616	315	447	768,5	260	410	118	502	200	60	415	147	54	133,4	812,5	602	-
200-318	K	S03	13	200	200	213 T	12A1	147	100	29	616	315	447	768,5	260	407	118	502	200	60	415	147	34,9	85,9	454,3	384	-
200-318	K	S03	13	200	200	215 T	12A1	147	100	29	616	315	447	768,5	260	407	118	502	200	60	415	147	34,9	85,9	482,3	399	-
200-318	K	S03	13	200	200	254 T	12A1	147	100	29	616	315	447	768,5	260	407	118	502	200	60	415	147	41,3	101,6	566,3	439	-
200-318	K	S03	13	200	200	256 T	12A1	147	100	29	616	315	447	768,5	260	407	118	502	200	60	415	147	41,3	101,6	612,3	459	-
200-318	K	S03	13	200	200	284 T	12A1	147	100	29	616	315	447	768,5	260	407	118	502	200	60	415	147	47,6	117,6	731,3	498	-
200-318	K	S03	13	200	200	286 T	12A1	147	100	29	616	315	447	768,5	260	407	118	502	200	60	415	147	47,6	117,6	731,3	529	-
200-318	K	S03	13	200	200	324 T	12A1	147	100	29	616	315	447	768,5	260	407	118	502	200	60	415	147	54	133,4	812,5	582	-
200-318	K	S03	13	200	200	326 T	12A1	147	100	29	616	315	447	768,5	260	407	118	502	200	60	415	147	54	133,4	812,5	598	-
100-400	K	S04	14	150	100	254 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	458	144	41,3	101,6	566,3	634	-
100-400	K	S04	14	150	100	256 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	458	144	41,3	101,6	612,3	654	-
100-400	K	S04	14	150	100	284 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	458	144	47,6	117,6	731,3	693	-
100-400	K	S04	14	150	100	286 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	458	144	47,6	117,6	731,3	724	-
100-400	K	S04	14	150	100	324 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	458	144	54	133,4	812,5	777	-
100-400	K	S04	14	150	100	326 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	458	144	54	133,4	812,5	793	-
100-400	K	S05	14	150	100	254 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	415	144	41,3	101,6	566,3	544	-
100-400	K	S05	14	150	100	256 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	415	144	41,3	101,6	612,3	564	-
100-400	K	S05	14	150	100	284 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	415	144	47,6	117,6	731,3	603	-
100-400	K	S05	14	150	100	286 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	415	144	47,6	117,6	731,3	634	-
100-400	K	S05	14	150	100	324 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	415	144	54	133,4	812,5	687	-
100-400	K	S05	14	150	100	326 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	415	144	54	133,4	812,5	703	-
100-400	K	S05	14	150	100	364 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	415	144	60,3	142,7	869	827	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
100-400	K	S05	14	150	100	365 T	67	147	112	24	746	315	397	899	305	370	100	402	150	60	415	144	60,3	142,7	869	827	-
100-401	F	S04	14	125	100	254 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	41,3	101,6	566,3	594	-
100-401	F	S04	14	125	100	256 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	41,3	101,6	612,3	614	-
100-401	F	S04	14	125	100	284 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	47,6	117,6	731,3	653	-
100-401	F	S04	14	125	100	286 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	47,6	117,6	731,3	684	-
100-401	F	S04	14	125	100	324 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	54	133,4	812,5	737	-
100-401	F	S04	14	125	100	326 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	54	133,4	812,5	753	-
100-401	F	S05	14	125	100	254 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	41,3	101,6	566,3	594	-
100-401	F	S05	14	125	100	256 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	41,3	101,6	612,3	614	-
100-401	F	S05	14	125	100	284 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	47,6	117,6	731,3	653	-
100-401	F	S05	14	125	100	286 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	47,6	117,6	731,3	684	-
100-401	F	S05	14	125	100	324 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	54	133,4	812,5	737	-
100-401	F	S05	14	125	100	326 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	54	133,4	812,5	753	-
100-401	K	S04	14	125	100	254 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	41,3	101,6	566,3	594	-
100-401	K	S04	14	125	100	256 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	41,3	101,6	612,3	614	-
100-401	K	S04	14	125	100	284 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	47,6	117,6	731,3	653	-
100-401	K	S04	14	125	100	286 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	47,6	117,6	731,3	684	-
100-401	K	S04	14	125	100	324 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	54	133,4	812,5	737	-
100-401	K	S04	14	125	100	326 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	54	133,4	812,5	753	-
100-401	K	S05	14	125	100	254 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	41,3	101,6	566,3	594	-
100-401	K	S05	14	125	100	256 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	41,3	101,6	612,3	614	-
100-401	K	S05	14	125	100	284 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	47,6	117,6	731,3	653	-
100-401	K	S05	14	125	100	286 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	47,6	117,6	731,3	684	-
100-401	K	S05	14	125	100	324 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	54	133,4	812,5	737	-
100-401	K	S05	14	125	100	326 T	24	157	185	27	740	315	397	903	270	370	120	412	120	60	458	180	54	133,4	812,5	753	-
100-403	D	S04	14	200	100	254 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	41,3	101,6	566,3	634	-
100-403	D	S04	14	200	100	256 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	41,3	101,6	612,3	654	-
100-403	D	S04	14	200	100	284 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	47,6	117,6	731,3	693	-
100-403	D	S04	14	200	100	286 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	47,6	117,6	731,3	724	-
100-403	D	S04	14	200	100	324 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	54	133,4	812,5	777	-
100-403	D	S04	14	200	100	326 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	54	133,4	812,5	793	-
100-403	D	S05	14	200	100	254 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	41,3	101,6	566,3	544	-
100-403	D	S05	14	200	100	256 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	41,3	101,6	612,3	564	-
100-403	D	S05	14	200	100	284 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	47,6	117,6	731,3	603	-
100-403	D	S05	14	200	100	286 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	47,6	117,6	731,3	634	-
100-403	D	S05	14	200	100	324 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	54	133,4	812,5	687	-
100-403	D	S05	14	200	100	326 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	54	133,4	812,5	703	-
100-403	D	S05	14	200	100	364 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	60,3	142,7	869	827	-
100-403	D	S05	14	200	100	365 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	60,3	142,7	869	827	-
150-400	D	S05	14	200	150	284 T	24	267	185	28	725	315	397	998	254	365	100	622	200	60	458	196	47,6	117,6	731,3	828	-
150-400	D	S05	14	200	150	286 T	24	267	185	28	725	315	397	998	254	365	100	622	200	60	458	196	47,6	117,6	731,3	859	-
150-400	D	S05	14	200	150	324 T	24	267	185	28	725	315	397	998	254	365	100	622	200	60	458	196	54	133,4	812,5	912	-
150-400	D	S05	14	200	150	326 T	24	267	185	28	725	315	397	998	254	365	100	622	200	60	458	196	54	133,4	812,5	928	-
150-400	D	S05	14	200	150	364 T	24	267	185	28	725	315	397	998	254	365	100	622	200	60	458	196	60,3	142,7	869	1052	-
150-400	K	S04	14	200	150	254 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	41,3	101,6	566,3	749	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
150-400	K	S04	14	200	150	256 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	41,3	101,6	612,3	769	-
150-400	K	S04	14	200	150	284 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	808	-
150-400	K	S04	14	200	150	286 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	839	-
150-400	K	S04	14	200	150	324 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	892	-
150-400	K	S04	14	200	150	326 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	908	-
150-400	K	S05	14	200	150	284 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	808	-
150-400	K	S05	14	200	150	286 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	839	-
150-400	K	S05	14	200	150	324 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	892	-
150-400	K	S05	14	200	150	326 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	908	-
150-400	K	S05	14	200	150	364 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	60,3	142,7	869	1032	-
150-400	K	S05	14	200	150	365 T	67	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	60,3	142,7	869	1032	-
150-400	K	S05	14	200	150	404 T	66	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	73	177,8	1003	1200	-
150-400	K	S05	14	200	150	405 T	66	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	73	177,8	1003	1200	-
150-401	F	S04	14	150	150	254 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	41,3	101,6	566,3	679	◎
150-401	F	S04	14	150	150	256 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	41,3	101,6	612,3	699	◎
150-401	F	S04	14	150	150	284 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	47,6	117,6	731,3	738	◎
150-401	F	S04	14	150	150	286 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	47,6	117,6	731,3	769	◎
150-401	F	S04	14	150	150	324 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	54	133,4	812,5	822	◎
150-401	F	S04	14	150	150	326 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	54	133,4	812,5	838	◎
150-401	F	S05	14	150	150	254 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	41,3	101,6	566,3	679	◎◎
150-401	F	S05	14	150	150	256 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	41,3	101,6	612,3	699	◎◎
150-401	F	S05	14	150	150	284 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	47,6	117,6	731,3	738	◎◎
150-401	F	S05	14	150	150	286 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	47,6	117,6	731,3	769	◎◎
150-401	F	S05	14	150	150	324 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	54	133,4	812,5	822	◎◎
150-401	F	S05	14	150	150	326 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	54	133,4	812,5	838	◎◎
150-401	F	S05	14	150	150	364 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	60,3	142,7	869	962	◎◎
150-401	F	S05	14	150	150	365 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	60,3	142,7	869	962	◎◎
150-401	K	S04	14	150	150	254 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	41,3	101,6	566,3	679	◎
150-401	K	S04	14	150	150	256 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	41,3	101,6	612,3	699	◎
150-401	K	S04	14	150	150	284 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	47,6	117,6	731,3	738	◎
150-401	K	S04	14	150	150	286 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	47,6	117,6	731,3	769	◎
150-401	K	S04	14	150	150	324 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	54	133,4	812,5	822	◎
150-401	K	S04	14	150	150	326 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	54	133,4	812,5	838	◎
150-401	K	S05	14	150	150	254 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	41,3	101,6	566,3	679	◎◎
150-401	K	S05	14	150	150	256 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	41,3	101,6	612,3	699	◎◎
150-401	K	S05	14	150	150	284 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	47,6	117,6	731,3	738	◎◎
150-401	K	S05	14	150	150	286 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	47,6	117,6	731,3	769	◎◎
150-401	K	S05	14	150	150	324 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	54	133,4	812,5	822	◎◎
150-401	K	S05	14	150	150	326 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	54	133,4	812,5	838	◎◎
150-401	K	S05	14	150	150	364 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	60,3	142,7	869	962	◎◎
150-401	K	S05	14	150	150	365 T	24	177	100	28	750	355	497	933	325	360	120	432	150	60	498	170	60,3	142,7	869	962	◎◎
150-401	K	S05	14	150	150	404 T	25	177	100	28	750	355	497	933	325	360	120	432	150	60	495	170	73	177,8	1003	1130	-
150-401	K	S05	14	150	150	405 T	25	177	100	28	750	355	497	933	325	360	120	432	150	60	495	170	73	177,8	1003	1130	-
150-401	K	S05	14	150	150	444 T	25	177	100	28	750	355	497	933	325	360	120	432	150	60	495	170	85,7	209,6	1158	1381	-
150-401	K	S05	14	150	150	445 T	25	177	100	28	750	355	497	933	325	360	120	432	150	60	495	170	85,7	209,6	1158	1381	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
150-401	K	S05	14	150	150	447 T	25	177	100	28	750	355	497	933	325	360	120	432	150	60	495	170	85,7	209,6	1247	1586	-
150-401	D	S06	14	250	150	326 T	40	324	185	28	968	355	472	1298	280	420	120	729	200	75	495	175	54	133,4	812,5	1208	-
150-401	D	S06	14	250	150	364 T	40	324	185	28	968	355	472	1298	280	420	120	729	200	75	495	175	60,3	142,7	869	1332	-
150-401	D	S06	14	250	150	365 T	40	324	185	28	968	355	472	1298	280	420	120	729	200	75	495	175	60,3	142,7	869	1332	-
150-401	D	S06	14	250	150	404 T	40	324	185	28	968	355	472	1298	280	420	120	729	200	75	495	175	73	177,8	1003	1405	-
150-401	D	S06	14	250	150	405 T	40	324	185	28	968	355	472	1298	280	420	120	729	200	75	495	175	73	177,8	1003	1405	-
150-403	K	S04	14	200	150	254 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	41,3	101,6	566,3	749	-
150-403	K	S04	14	200	150	256 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	41,3	101,6	612,3	769	-
150-403	K	S04	14	200	150	284 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	808	-
150-403	K	S04	14	200	150	286 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	839	-
150-403	K	S04	14	200	150	324 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	892	-
150-403	K	S04	14	200	150	326 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	908	-
150-403	K	S05	14	200	150	284 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	808	-
150-403	K	S05	14	200	150	286 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	839	-
150-403	K	S05	14	200	150	324 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	892	-
150-403	K	S05	14	200	150	326 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	908	-
150-403	K	S05	14	200	150	364 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	60,3	142,7	869	1032	-
150-403	K	S05	14	200	150	365 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	60,3	142,7	869	1032	-
150-403	K	S05	14	200	150	404 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	73	177,8	1003	1200	-
150-403	K	S05	14	200	150	405 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	73	177,8	1003	1200	-
150-403	K	S05	14	200	150	444 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	85,7	209,6	1158	1451	-
150-403	K	S05	14	200	150	445 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	85,7	209,6	1158	1451	-
150-403	K	S05	14	200	150	447 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	85,7	209,6	1247	1656	-
150-403	D	S04	14	200	150	254 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	41,3	101,6	566,3	749	-
150-403	D	S04	14	200	150	256 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	41,3	101,6	612,3	769	-
150-403	D	S04	14	200	150	284 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	47,6	117,6	731,3	808	-
150-403	D	S04	14	200	150	286 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	47,6	117,6	731,3	839	-
150-403	D	S04	14	200	150	324 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	54	133,4	812,5	892	-
150-403	D	S04	14	200	150	326 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	54	133,4	812,5	908	-
150-403	D	S05	14	200	150	284 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	47,6	117,6	731,3	808	-
150-403	D	S05	14	200	150	286 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	47,6	117,6	731,3	839	-
150-403	D	S05	14	200	150	324 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	54	133,4	812,5	892	-
150-403	D	S05	14	200	150	326 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	54	133,4	812,5	908	-
150-403	D	S05	14	200	150	364 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	60,3	142,7	869	1032	-
150-403	D	S05	14	200	150	365 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	60,3	142,7	869	1032	-
150-403	D	S05	14	200	150	404 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	73	177,8	1003	1200	-
150-403	D	S05	14	200	150	405 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	73	177,8	1003	1200	-
150-403	D	S05	14	200	150	444 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	85,7	209,6	1158	1451	-
150-403	D	S05	14	200	150	445 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	85,7	209,6	1158	1451	-
150-403	D	S05	14	200	150	447 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	85,7	209,6	1247	1656	-
151-403	K	S04	14	200	150	254 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	41,3	101,6	566,3	749	-
151-403	K	S04	14	200	150	256 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	41,3	101,6	612,3	769	-
151-403	K	S04	14	200	150	284 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	808	-
151-403	K	S04	14	200	150	286 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	839	-
151-403	K	S04	14	200	150	324 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	892	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
151-403	K	S04	14	200	150	326 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	908	-
151-403	K	S05	14	200	150	284 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	808	-
151-403	K	S05	14	200	150	286 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	47,6	117,6	731,3	839	-
151-403	K	S05	14	200	150	324 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	892	-
151-403	K	S05	14	200	150	326 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	54	133,4	812,5	908	-
151-403	K	S05	14	200	150	364 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	60,3	142,7	869	1032	-
151-403	K	S05	14	200	150	365 T	50	167	100	28	721	355	497	894	300	390	100	522	200	60	498	199	60,3	142,7	869	1032	-
151-403	K	S05	14	200	150	404 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	73	177,8	1003	1200	-
151-403	K	S05	14	200	150	405 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	73	177,8	1003	1200	-
151-403	K	S05	14	200	150	444 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	85,7	209,6	1158	1451	-
151-403	K	S05	14	200	150	445 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	85,7	209,6	1158	1451	-
151-403	K	S05	14	200	150	447 T	51	167	100	28	721	355	497	894	300	390	100	522	200	60	495	199	85,7	209,6	1247	1656	-
150-503	K	S06	14	150	150	404 T	27	157	100	28	1003	375	497	1166	305	380	118	410	150	75	535	410	73	177,8	1003	1350	-
150-503	K	S06	14	150	150	405 T	27	157	100	28	1003	375	497	1166	305	380	118	410	150	75	535	410	73	177,8	1003	1350	-
150-503	K	S06	14	150	150	444 T	27	157	100	28	1003	375	497	1166	305	380	118	410	150	75	535	410	85,7	209,6	1158	1601	-
150-503	K	S06	14	150	150	445 T	27	157	100	28	1003	375	497	1166	305	380	118	410	150	75	535	410	85,7	209,6	1158	1601	-
150-503	K	S06	14	150	150	447 T	27	157	100	28	1003	375	497	1166	305	380	118	410	150	75	535	410	85,7	209,6	1247	1806	-
150-503	K	S07	14	150	150	447 T	59	157	100	28	1148	375	497	1311	305	380	118	410	150	95	535	410	85,7	209,6	1396	1981	-
150-503	K	S07	14	150	150	449 T	59	157	100	28	1148	375	497	1311	305	380	118	410	150	95	535	410	85,7	209,6	1396	1981	-
150-503	D	S06	14	200	150	404 T	27	157	100	28	1003	375	497	1166	305	380	118	510	200	75	535	410	73	177,8	1003	1350	-
150-503	D	S06	14	200	150	405 T	27	157	100	28	1003	375	497	1166	305	380	118	510	200	75	535	410	73	177,8	1003	1350	-
150-503	D	S06	14	200	150	444 T	27	157	100	28	1003	375	497	1166	305	380	118	510	200	75	535	410	85,7	209,6	1158	1601	-
150-503	D	S06	14	200	150	445 T	27	157	100	28	1003	375	497	1166	305	380	118	510	200	75	535	410	85,7	209,6	1158	1601	-
150-503	D	S06	14	200	150	447 T	27	157	100	28	1003	375	497	1166	305	380	118	510	200	75	535	410	85,7	209,6	1247	1806	-
150-503	D	S07	14	200	150	447 T	59	157	100	28	1148	375	497	1311	305	380	118	510	200	95	535	410	85,7	209,6	1396	1981	-
150-503	D	S07	14	200	150	449 T	59	157	100	28	1148	375	497	1311	305	380	118	510	200	95	535	410	85,7	209,6	1396	1981	-
200-330	K	S04	14	250	200	254 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	41,3	101,6	566,3	694	-
200-330	K	S04	14	250	200	256 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	41,3	101,6	612,3	714	-
200-330	K	S04	14	250	200	284 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	47,6	117,6	731,3	753	-
200-330	K	S04	14	250	200	286 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	47,6	117,6	731,3	784	-
200-330	K	S04	14	250	200	324 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	54	133,4	812,5	837	-
200-330	K	S04	14	250	200	326 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	54	133,4	812,5	853	-
200-330	K	S05	14	250	200	254 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	41,3	101,6	566,3	694	-
200-330	K	S05	14	250	200	256 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	41,3	101,6	612,3	714	-
200-330	K	S05	14	250	200	284 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	47,6	117,6	731,3	753	-
200-330	K	S05	14	250	200	286 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	47,6	117,6	731,3	784	-
200-330	K	S05	14	250	200	324 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	54	133,4	812,5	837	-
200-330	K	S05	14	250	200	326 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	54	133,4	812,5	853	-
200-330	K	S05	14	250	200	364 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	60,3	142,7	869	977	-
200-330	K	S05	14	250	200	365 T	24	177	185	30	755	355	497	938	300	425	118	582	200	60	498	165	60,3	142,7	869	977	-
200-400	D	S06	14	250	200	326 T	44	302	180	30	985	450	517	1293	320	550	125	706	200	75	590	145	54	133,4	812,5	1238	-
200-400	D	S06	14	250	200	364 T	44	302	180	30	985	450	517	1293	320	550	125	706	200	75	590	145	60,3	142,7	869	1362	-
200-400	D	S06	14	250	200	365 T	44	302	180	30	985	450	517	1293	320	550	125	706	200	75	590	145	60,3	142,7	869	1362	-
200-400	D	S06	14	250	200	404 T	44	302	180	30	985	450	517	1293	320	550	125	706	200	75	590	145	73	177,8	1003	1435	-
200-401	K	S04	14	200	200	284 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	47,6	117,6	731,3	748	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-401	K	S04	14	200	200	286 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	47,6	117,6	731,3	779	-
200-401	K	S04	14	200	200	324 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	54	133,4	812,5	832	-
200-401	K	S04	14	200	200	326 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	54	133,4	812,5	848	-
200-401	K	S05	14	200	200	284 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	47,6	117,6	731,3	748	◎◎
200-401	K	S05	14	200	200	286 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	47,6	117,6	731,3	779	-
200-401	K	S05	14	200	200	324 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	54	133,4	812,5	832	-
200-401	K	S05	14	200	200	326 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	54	133,4	812,5	848	-
200-401	K	S05	14	200	200	364 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	60,3	142,7	869	972	-
200-401	K	S05	14	200	200	365 T	24	222	100	30	800	355	497	1028	350	370	200	577	200	60	498	120	60,3	142,7	869	972	-
200-401	K	S05	14	200	200	404 T	25	222	100	30	800	355	497	1028	350	370	200	577	200	60	495	120	73	177,8	1003	1140	-
200-401	K	S05	14	200	200	405 T	25	222	100	30	800	355	497	1028	350	370	200	577	200	60	495	120	73	177,8	1003	1140	-
200-401	K	S05	14	200	200	444 T	25	222	100	30	800	355	497	1028	350	370	200	577	200	60	495	120	85,7	209,6	1158	1391	-
200-402	K	S04	14	200	200	284 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	47,6	117,6	731,3	748	-
200-402	K	S04	14	200	200	286 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	47,6	117,6	731,3	779	-
200-402	K	S04	14	200	200	324 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	54	133,4	812,5	832	-
200-402	K	S04	14	200	200	326 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	54	133,4	812,5	848	-
200-402	K	S05	14	200	200	284 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	47,6	117,6	731,3	748	-
200-402	K	S05	14	200	200	286 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	47,6	117,6	731,3	779	-
200-402	K	S05	14	200	200	324 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	54	133,4	812,5	832	-
200-402	K	S05	14	200	200	326 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	54	133,4	812,5	848	-
200-402	K	S05	14	200	200	364 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	60,3	142,7	869	972	-
200-402	K	S05	14	200	200	365 T	67	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	60,3	142,7	869	972	-
200-402	K	S05	14	200	200	404 T	66	157	105	30	723	375	497	886	325	440	140	512	200	60	515	167	73	177,8	1003	1140	-
200-402	K	S05	14	200	200	405 T	66	157	105	30	723	375	497	886	325	440	140	512	200	60	515	167	73	177,8	1003	1140	-
200-402	K	S05	14	200	200	444 T	66	157	105	30	723	375	497	886	325	440	140	512	200	60	515	167	85,7	209,6	1158	1391	-
200-402	K	S05	14	200	200	445 T	66	157	105	30	723	375	497	886	325	440	140	512	200	60	515	167	85,7	209,6	1158	1391	-
200-402	K	S06	14	200	200	444 T	27	157	105	30	953	375	497	1116	325	440	140	512	200	75	535	167	85,7	209,6	1158	1421	-
200-402	K	S06	14	200	200	445 T	27	157	105	30	953	375	497	1116	325	440	140	512	200	75	535	167	85,7	209,6	1158	1421	-
200-402	D	S04	14	250	200	284 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	47,6	117,6	731,3	748	-
200-402	D	S04	14	250	200	286 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	47,6	117,6	731,3	779	-
200-402	D	S04	14	250	200	324 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	54	133,4	812,5	832	-
200-402	D	S04	14	250	200	326 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	54	133,4	812,5	848	-
200-402	D	S05	14	250	200	284 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	47,6	117,6	731,3	748	-
200-402	D	S05	14	250	200	286 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	47,6	117,6	731,3	779	-
200-402	D	S05	14	250	200	324 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	54	133,4	812,5	832	-
200-402	D	S05	14	250	200	326 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	54	133,4	812,5	848	-
200-402	D	S05	14	250	200	364 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	60,3	142,7	869	972	-
200-402	D	S05	14	250	200	365 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	60,3	142,7	869	972	-
200-402	D	S05	14	250	200	404 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	73	177,8	1003	1140	-
200-402	D	S05	14	250	200	405 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	73	177,8	1003	1140	-
200-402	D	S05	14	250	200	444 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	85,7	209,6	1158	1391	-
200-402	D	S05	14	250	200	445 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	85,7	209,6	1158	1391	-
200-402	D	S06	14	250	200	444 T	27	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	85,7	209,6	1158	1421	-
200-402	D	S06	14	250	200	445 T	27	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	85,7	209,6	1158	1421	-
200-403	K	S04	14	200	200	284 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	47,6	117,6	731,3	748	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-403	K	S04	14	200	200	286 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	47,6	117,6	731,3	779	-
200-403	K	S04	14	200	200	324 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	54	133,4	812,5	832	-
200-403	K	S04	14	200	200	326 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	54	133,4	812,5	848	-
200-403	K	S05	14	200	200	284 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	47,6	117,6	731,3	748	◎
200-403	K	S05	14	200	200	286 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	47,6	117,6	731,3	779	-
200-403	K	S05	14	200	200	324 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	54	133,4	812,5	832	-
200-403	K	S05	14	200	200	326 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	54	133,4	812,5	848	-
200-403	K	S05	14	200	200	364 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	60,3	142,7	869	972	-
200-403	K	S05	14	200	200	365 T	50	157	105	30	723	375	497	886	325	440	140	512	200	60	518	167	60,3	142,7	869	972	-
200-403	K	S05	14	200	200	404 T	51	157	105	30	723	375	497	886	325	440	140	512	200	60	515	167	73	177,8	1003	1140	-
200-403	K	S05	14	200	200	405 T	51	157	105	30	723	375	497	886	325	440	140	512	200	60	515	167	73	177,8	1003	1140	-
200-403	K	S05	14	200	200	444 T	51	157	105	30	723	375	497	886	325	440	140	512	200	60	515	167	85,7	209,6	1158	1391	-
200-403	K	S05	14	200	200	445 T	51	157	105	30	723	375	497	886	325	440	140	512	200	60	515	167	85,7	209,6	1158	1391	-
200-403	K	S06	14	200	200	444 T	27	157	105	30	953	375	497	1116	325	440	140	512	200	75	535	167	85,7	209,6	1158	1421	-
200-403	K	S06	14	200	200	445 T	27	157	105	30	953	375	497	1116	325	440	140	512	200	75	535	167	85,7	209,6	1158	1421	-
200-403	K	S06	14	200	200	447 T	27	157	105	30	953	375	497	1116	325	440	140	512	200	75	535	167	85,7	209,6	1247	1626	-
200-403	K	S06	14	200	200	449 T	27	157	105	30	953	375	497	1116	325	440	140	512	200	75	535	167	85,7	209,6	1396	1626	-
200-405	D	S04	14	250	200	284 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	47,6	117,6	731,3	748	-
200-405	D	S04	14	250	200	286 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	47,6	117,6	731,3	779	-
200-405	D	S04	14	250	200	324 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	54	133,4	812,5	832	-
200-405	D	S04	14	250	200	326 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	54	133,4	812,5	848	-
200-405	D	S05	14	250	200	284 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	47,6	117,6	731,3	748	◎
200-405	D	S05	14	250	200	286 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	47,6	117,6	731,3	779	-
200-405	D	S05	14	250	200	324 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	54	133,4	812,5	832	-
200-405	D	S05	14	250	200	326 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	54	133,4	812,5	848	-
200-405	D	S05	14	250	200	364 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	60,3	142,7	869	972	-
200-405	D	S05	14	250	200	365 T	50	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	60,3	142,7	869	972	-
200-405	D	S05	14	250	200	404 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	73	177,8	1003	1140	-
200-405	D	S05	14	250	200	405 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	73	177,8	1003	1140	-
200-405	D	S05	14	250	200	444 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	85,7	209,6	1158	1391	-
200-405	D	S05	14	250	200	445 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	85,7	209,6	1158	1391	-
200-405	D	S06	14	250	200	444 T	27	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	85,7	209,6	1158	1421	-
200-405	D	S06	14	250	200	445 T	27	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	85,7	209,6	1158	1421	-
200-405	D	S06	14	250	200	447 T	27	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	85,7	209,6	1247	1626	-
200-405	D	S06	14	250	200	449 T	27	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	85,7	209,6	1396	1626	-
200-502	K	S06	14	200	200	364 T	27	197	120	30	1015	375	557	1218	335	470	118	550	200	75	535	115	60,3	142,7	869	1417	-
200-502	K	S06	14	200	200	365 T	27	197	120	30	1015	375	557	1218	335	470	118	550	200	75	535	115	60,3	142,7	869	1417	-
200-502	K	S06	14	200	200	404 T	27	197	120	30	1015	375	557	1218	335	470	118	550	200	75	535	115	73	177,8	1003	1490	-
200-502	K	S06	14	200	200	405 T	27	197	120	30	1015	375	557	1218	335	470	118	550	200	75	535	115	73	177,8	1003	1490	-
200-502	K	S07	14	200	200	364 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	60,3	142,7	869	1722	®
200-502	K	S07	14	200	200	365 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	60,3	142,7	869	1722	-
200-502	K	S07	14	200	200	404 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	73	177,8	1003	1795	-
200-502	K	S07	14	200	200	405 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	73	177,8	1003	1795	-
200-502	K	S07	14	200	200	444 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	85,7	209,6	1158	2046	-
200-502	K	S07	14	200	200	445 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	85,7	209,6	1158	2046	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-502	K	S07	14	200	200	447 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	85,7	209,6	1247	2251	-
200-503	K	S06	14	200	200	364 T	27	197	120	30	1015	375	557	1218	335	470	118	550	200	75	535	115	60,3	142,7	869	1417	-
200-503	K	S06	14	200	200	365 T	27	197	120	30	1015	375	557	1218	335	470	118	550	200	75	535	115	60,3	142,7	869	1417	-
200-503	K	S06	14	200	200	404 T	27	197	120	30	1015	375	557	1218	335	470	118	550	200	75	535	115	73	177,8	1003	1490	-
200-503	K	S06	14	200	200	405 T	27	197	120	30	1015	375	557	1218	335	470	118	550	200	75	535	115	73	177,8	1003	1490	-
200-503	K	S07	14	200	200	364 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	60,3	142,7	869	1722	®
200-503	K	S07	14	200	200	365 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	60,3	142,7	869	1722	-
200-503	K	S07	14	200	200	404 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	73	177,8	1003	1795	-
200-503	K	S07	14	200	200	405 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	73	177,8	1003	1795	-
200-503	K	S07	14	200	200	444 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	85,7	209,6	1158	2046	-
200-503	K	S07	14	200	200	445 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	85,7	209,6	1158	2046	-
200-503	K	S07	14	200	200	447 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	85,7	209,6	1247	2251	-
200-503	K	S07	14	200	200	449 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	85,7	209,6	1396	2251	-
200-503	K	S07	14	200	200	504 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	92,1	263,5	1256	2345	-
200-503	K	S07	14	200	200	505 T	29	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	92,1	263,5	1256	2345	-
200-503	K	S07	14	200	200	586 T	30	197	120	30	1160	375	557	1363	335	470	118	550	200	95	600	225	98,4	288,9	1551	3120	-
200-503	D	S06	14	250	200	364 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	60,3	142,7	869	1417	-
200-503	D	S06	14	250	200	365 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	60,3	142,7	869	1417	-
200-503	D	S06	14	250	200	404 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	73	177,8	1003	1490	-
200-503	D	S06	14	250	200	405 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	73	177,8	1003	1490	-
200-503	D	S07	14	250	200	364 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	60,3	142,7	869	1722	®
200-503	D	S07	14	250	200	365 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	60,3	142,7	869	1722	-
200-503	D	S07	14	250	200	404 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	73	177,8	1003	1795	-
200-503	D	S07	14	250	200	405 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	73	177,8	1003	1795	-
200-503	D	S07	14	250	200	444 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1158	2046	-
200-503	D	S07	14	250	200	445 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1158	2046	-
200-503	D	S07	14	250	200	447 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1247	2251	-
200-503	D	S07	14	250	200	449 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1396	2251	-
200-503	D	S07	14	250	200	504 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	92,1	263,5	1256	2345	-
200-503	D	S07	14	250	200	505 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	92,1	263,5	1256	2345	-
200-503	D	S07	14	250	200	586 T	30	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	98,4	288,9	1551	3120	-
200-504	K	S06	14	250	200	364 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	60,3	142,7	869	1417	-
200-504	K	S06	14	250	200	365 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	60,3	142,7	869	1417	-
200-504	K	S06	14	250	200	404 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	73	177,8	1003	1490	-
200-504	K	S06	14	250	200	405 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	73	177,8	1003	1490	-
200-504	K	S07	14	250	200	364 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	60,3	142,7	869	1722	®
200-504	K	S07	14	250	200	365 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	60,3	142,7	869	1722	-
200-504	K	S07	14	250	200	404 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	73	177,8	1003	1795	-
200-504	K	S07	14	250	200	405 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	73	177,8	1003	1795	-
200-504	K	S07	14	250	200	444 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1158	2046	-
200-504	K	S07	14	250	200	445 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1158	2046	-
200-504	K	S07	14	250	200	447 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1247	2251	-
200-505	K	S06	14	250	200	364 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	60,3	142,7	869	1417	-
200-505	K	S06	14	250	200	365 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	60,3	142,7	869	1417	-
200-505	K	S06	14	250	200	404 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	73	177,8	1003	1490	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-505	K	S06	14	250	200	405 T	27	197	120	30	1015	375	557	1218	335	470	118	600	200	75	535	115	73	177,8	1003	1490	-
200-505	K	S07	14	250	200	364 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	60,3	142,7	869	1722	®
200-505	K	S07	14	250	200	365 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	60,3	142,7	869	1722	-
200-505	K	S07	14	250	200	404 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	73	177,8	1003	1795	-
200-505	K	S07	14	250	200	405 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	73	177,8	1003	1795	-
200-505	K	S07	14	250	200	444 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1158	2046	-
200-505	K	S07	14	250	200	445 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1158	2046	-
200-505	K	S07	14	250	200	447 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1247	2251	-
200-505	K	S07	14	250	200	449 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	85,7	209,6	1396	2251	-
200-505	K	S07	14	250	200	504 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	92,1	263,5	1256	2345	-
200-505	K	S07	14	250	200	505 T	29	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	92,1	263,5	1256	2345	-
200-505	K	S07	14	250	200	586 T	30	197	120	30	1160	375	557	1363	335	470	118	600	200	95	600	225	98,4	288,9	1551	3120	-
250-400	K	S04	14	250	250	284 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	908	-
250-400	K	S04	14	250	250	286 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	939	-
250-400	K	S04	14	250	250	324 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	992	-
250-400	K	S04	14	250	250	326 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	1008	-
250-400	K	S05	14	250	250	284 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	908	-
250-400	K	S05	14	250	250	286 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	939	-
250-400	K	S05	14	250	250	324 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	992	-
250-400	K	S05	14	250	250	326 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	1008	-
250-400	K	S05	14	250	250	364 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	60,3	142,7	869	1132	-
250-400	K	S05	14	250	250	365 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	60,3	142,7	869	1132	-
250-400	K	S05	14	250	250	404 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	73	177,8	1003	1205	-
250-400	K	S05	14	250	250	405 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	73	177,8	1003	1205	-
250-400	K	S05	14	250	250	444 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	85,7	209,6	1158	1456	-
250-400	K	S05	14	250	250	445 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	85,7	209,6	1158	1456	-
250-400	D	S05	14	250	250	284 T	25	247	180	33	815	455	597	1068	340	550	143	652	200	60	595	105	47,6	117,6	731,3	1023	-
250-400	D	S05	14	250	250	286 T	25	247	180	33	815	455	597	1068	340	550	143	652	200	60	595	105	47,6	117,6	731,3	1054	-
250-400	D	S05	14	250	250	324 T	25	247	180	33	815	455	597	1068	340	550	143	652	200	60	595	105	54	133,4	812,5	1107	-
250-400	D	S05	14	250	250	326 T	25	247	180	33	815	455	597	1068	340	550	143	652	200	60	595	105	54	133,4	812,5	1123	-
250-400	D	S06	14	250	250	364 T	44	247	180	33	1045	455	597	1298	340	550	143	652	200	75	595	85	60,3	142,7	869	1382	-
250-400	D	S06	14	250	250	365 T	44	247	180	33	1045	455	597	1298	340	550	143	652	200	75	595	85	60,3	142,7	869	1382	-
250-401	K	S04	14	250	250	284 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	908	-
250-401	K	S04	14	250	250	286 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	939	-
250-401	K	S04	14	250	250	324 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	992	-
250-401	K	S04	14	250	250	326 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	1008	-
250-401	K	S05	14	250	250	284 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	908	-
250-401	K	S05	14	250	250	286 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	939	-
250-401	K	S05	14	250	250	324 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	992	-
250-401	K	S05	14	250	250	326 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	1008	-
250-401	K	S05	14	250	250	364 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	60,3	142,7	869	1132	-
250-401	K	S05	14	250	250	365 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	60,3	142,7	869	1132	-
250-401	K	S05	14	250	250	404 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	73	177,8	1003	1205	-
250-401	K	S05	14	250	250	405 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	73	177,8	1003	1205	-
250-401	K	S05	14	250	250	444 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	85,7	209,6	1158	1456	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
250-401	K	S06	14	250	250	444 T	44	177	180	33	960	425	597	1143	310	500	143	582	200	75	565	190	85,7	209,6	1158	1496	-
250-401	K	S06	14	250	250	445 T	44	177	180	33	960	425	597	1143	310	500	143	582	200	75	565	190	85,7	209,6	1158	1496	-
250-403	K	S04	14	250	250	284 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	908	-
250-403	K	S04	14	250	250	286 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	939	-
250-403	K	S04	14	250	250	324 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	992	-
250-403	K	S04	14	250	250	326 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	1008	-
250-403	K	S05	14	250	250	284 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	908	-
250-403	K	S05	14	250	250	286 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	47,6	117,6	731,3	939	-
250-403	K	S05	14	250	250	324 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	992	-
250-403	K	S05	14	250	250	326 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	54	133,4	812,5	1008	-
250-403	K	S05	14	250	250	364 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	60,3	142,7	869	1132	-
250-403	K	S05	14	250	250	365 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	60,3	142,7	869	1132	-
250-403	K	S05	14	250	250	404 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	73	177,8	1003	1205	-
250-403	K	S05	14	250	250	405 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	73	177,8	1003	1205	-
250-403	K	S05	14	250	250	444 T	25	177	180	33	730	425	597	913	310	500	143	582	200	60	565	190	85,7	209,6	1158	1456	-
250-403	K	S06	14	250	250	405 T	44	177	180	33	960	425	597	1143	310	500	143	582	200	75	565	190	73	177,8	1003	1245	-
250-403	K	S06	14	250	250	444 T	44	177	180	33	960	425	597	1143	310	500	143	582	200	75	565	190	85,7	209,6	1158	1496	-
250-403	K	S06	14	250	250	445 T	44	177	180	33	960	425	597	1143	310	500	143	582	200	75	565	190	85,7	209,6	1158	1496	-
250-403	K	S06	14	250	250	447 T	44	177	180	33	960	425	597	1143	310	500	143	582	200	75	565	190	85,7	209,6	1247	1701	-
250-403	K	S06	14	250	250	449 T	44	177	180	33	960	425	597	1143	310	500	143	582	200	75	565	190	85,7	209,6	1396	1701	-
250-402	D	S04	14	250	250	284 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	47,6	117,6	731,3	908	-
250-402	D	S04	14	250	250	286 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	47,6	117,6	731,3	939	-
250-402	D	S04	14	250	250	324 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	54	133,4	812,5	992	-
250-402	D	S04	14	250	250	326 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	54	133,4	812,5	1008	-
250-402	D	S05	14	250	250	284 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	47,6	117,6	731,3	908	-
250-402	D	S05	14	250	250	286 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	47,6	117,6	731,3	939	-
250-402	D	S05	14	250	250	324 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	54	133,4	812,5	992	-
250-402	D	S05	14	250	250	326 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	54	133,4	812,5	1008	-
250-402	D	S05	14	250	250	364 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	60,3	142,7	869	1132	-
250-402	D	S05	14	250	250	365 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	60,3	142,7	869	1132	-
250-402	D	S05	14	250	250	404 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	73	177,8	1003	1205	-
250-402	D	S05	14	250	250	405 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	73	177,8	1003	1205	-
250-402	D	S05	14	250	250	444 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	85,7	209,6	1158	1456	-
250-402	D	S06	14	250	250	405 T	44	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	73	177,8	1003	1245	-
250-402	D	S06	14	250	250	444 T	44	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	85,7	209,6	1158	1496	-
250-402	D	S06	14	250	250	445 T	44	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	85,7	209,6	1158	1496	-
250-402	D	S06	14	250	250	447 T	44	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	85,7	209,6	1247	1701	-
250-402	D	S06	14	250	250	449 T	44	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	85,7	209,6	1396	1701	-
250-630	K	S07	14	250	250	444 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	85,7	209,6	1158	2231	-
250-630	K	S07	14	250	250	445 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	85,7	209,6	1158	2231	-
250-630	K	S07	14	250	250	447 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	85,7	209,6	1247	2436	-
250-630	K	S07	14	250	250	449 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	85,7	209,6	1396	2436	-
250-630	K	S07	14	250	250	504 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	92,1	263,5	1256	2530	-
250-630	K	S07	14	250	250	505 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	92,1	263,5	1256	2530	-
250-630	K	S07	14	250	250	586 T	30	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	98,4	288,9	1551	3305	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
250-630	K	S07	14	250	250	587 T	30	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	98,4	288,9	1551	3305	-
250-632	K	S07	14	250	250	444 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	85,7	209,6	1158	2231	-
250-632	K	S07	14	250	250	445 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	85,7	209,6	1158	2231	-
250-632	K	S07	14	250	250	447 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	85,7	209,6	1247	2436	-
250-632	K	S07	14	250	250	449 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	85,7	209,6	1396	2436	-
250-632	K	S07	14	250	250	504 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	92,1	263,5	1256	2530	-
250-632	K	S07	14	250	250	505 T	29	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	92,1	263,5	1256	2530	-
250-632	K	S07	14	250	250	586 T	30	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	98,4	288,9	1551	3305	-
250-632	K	S07	14	250	250	587 T	30	197	150	33	1190	500	697	1393	425	590	143	600	200	95	725	200	98,4	288,9	1551	3305	-
300-400	K	S04	14	300	300	284 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1068	-
300-400	K	S04	14	300	300	286 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1099	-
300-400	K	S04	14	300	300	324 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1152	-
300-400	K	S04	14	300	300	326 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1168	-
300-400	K	S05	14	300	300	284 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1068	-
300-400	K	S05	14	300	300	286 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1099	-
300-400	K	S05	14	300	300	324 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1152	-
300-400	K	S05	14	300	300	326 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1168	-
300-400	K	S05	14	300	300	364 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	60,3	142,7	869	1292	-
300-400	K	S05	14	300	300	365 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	60,3	142,7	869	1292	-
300-400	K	S05	14	300	300	404 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	73	177,8	1003	1365	-
300-400	K	S05	14	300	300	405 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	73	177,8	1003	1365	-
300-400	K	S05	14	300	300	444 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	85,7	209,6	1158	1616	-
300-400	K	S05	14	300	300	445 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	85,7	209,6	1158	1616	-
300-400	D	S05	14	300	300	324 T	25	312	180	32	752	450	622	1070	360	610	143	722	200	60	590	168	54	133,4	812,5	1262	-
300-400	D	S05	14	300	300	326 T	25	312	180	32	752	450	622	1070	360	610	143	722	200	60	590	168	54	133,4	812,5	1278	-
300-400	D	S05	14	300	300	364 T	25	312	180	32	752	450	622	1070	360	610	143	722	200	60	590	168	60,3	142,7	869	1402	-
300-400	D	S05	14	300	300	365 T	25	312	180	32	752	450	622	1070	360	610	143	722	200	60	590	168	60,3	142,7	869	1402	-
300-400	D	S06	14	300	300	364 T	44	312	180	32	980	450	622	1298	360	610	143	722	200	75	590	150	60,3	142,7	869	1537	-
300-400	D	S06	14	300	300	365 T	44	312	180	32	980	450	622	1298	360	610	143	722	200	75	590	150	60,3	142,7	869	1537	-
300-400	D	S06	14	300	300	404 T	44	312	180	32	980	450	622	1298	360	610	143	722	200	75	590	150	73	177,8	1003	1610	-
300-400	D	S06	14	300	300	405 T	44	312	180	32	980	450	622	1298	360	610	143	722	200	75	590	150	73	177,8	1003	1610	-
300-400	D	S06	14	300	300	444 T	44	312	180	32	980	450	622	1298	360	610	143	722	200	75	590	150	85,7	209,6	1158	1861	-
300-401	K	S04	14	300	300	284 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1068	-
300-401	K	S04	14	300	300	286 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1099	-
300-401	K	S04	14	300	300	324 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1152	-
300-401	K	S04	14	300	300	326 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1168	-
300-401	K	S05	14	300	300	284 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1068	-
300-401	K	S05	14	300	300	286 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1099	-
300-401	K	S05	14	300	300	324 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1152	-
300-401	K	S05	14	300	300	326 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1168	-
300-401	K	S05	14	300	300	364 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	60,3	142,7	869	1292	-
300-401	K	S05	14	300	300	365 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	60,3	142,7	869	1292	-
300-401	K	S05	14	300	300	404 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	73	177,8	1003	1365	-
300-401	K	S05	14	300	300	405 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	73	177,8	1003	1365	-
300-401	K	S05	14	300	300	444 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	85,7	209,6	1158	1616	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
300-401	K	S05	14	300	300	445 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	85,7	209,6	1158	1616	-
300-402	D	S04	14	300	300	284 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1068	-
300-402	D	S04	14	300	300	286 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1099	-
300-402	D	S04	14	300	300	324 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	54	133,4	812,5	1152	-
300-402	D	S04	14	300	300	326 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	54	133,4	812,5	1168	-
300-402	D	S05	14	300	300	284 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1068	-
300-402	D	S05	14	300	300	286 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1099	-
300-402	D	S05	14	300	300	324 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	54	133,4	812,5	1152	-
300-402	D	S05	14	300	300	326 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	54	133,4	812,5	1168	-
300-402	D	S05	14	300	300	364 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	60,3	142,7	869	1292	-
300-402	D	S05	14	300	300	365 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	60,3	142,7	869	1292	-
300-402	D	S05	14	300	300	404 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	73	177,8	1003	1365	-
300-402	D	S05	14	300	300	405 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	73	177,8	1003	1365	-
300-402	D	S05	14	300	300	444 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	85,7	209,6	1158	1616	-
300-402	D	S05	14	300	300	445 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	85,7	209,6	1158	1616	-
300-403	K	S05	14	300	300	284 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1068	-
300-403	K	S05	14	300	300	286 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	47,6	117,6	731,3	1099	-
300-403	K	S05	14	300	300	324 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1152	-
300-403	K	S05	14	300	300	326 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	54	133,4	812,5	1168	-
300-403	K	S05	14	300	300	364 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	60,3	142,7	869	1292	-
300-403	K	S05	14	300	300	365 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	60,3	142,7	869	1292	-
300-403	K	S05	14	300	300	404 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	73	177,8	1003	1365	-
300-403	K	S05	14	300	300	405 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	73	177,8	1003	1365	-
300-403	K	S05	14	300	300	444 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	85,7	209,6	1158	1616	-
300-403	K	S05	14	300	300	445 T	25	212	180	28	750	450	622	968	355	590	143	617	200	60	590	170	85,7	209,6	1158	1616	-
300-500	K	S06	14	300	300	324 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	54	133,4	812,5	1417	-
300-500	K	S06	14	300	300	326 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	54	133,4	812,5	1433	-
300-500	K	S06	14	300	300	364 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	60,3	142,7	869	1557	-
300-500	K	S06	14	300	300	365 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	60,3	142,7	869	1557	-
300-500	K	S06	14	300	300	404 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	73	177,8	1003	1630	-
300-500	K	S06	14	300	300	405 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	73	177,8	1003	1630	-
300-500	K	S07	14	300	300	365 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	60,3	142,7	869	1637	-
300-500	K	S07	14	300	300	404 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	73	177,8	1003	1710	-
300-500	K	S07	14	300	300	405 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	73	177,8	1003	1710	-
300-500	K	S07	14	300	300	444 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1158	1961	-
300-500	K	S07	14	300	300	445 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1158	1961	-
300-500	K	S07	14	300	300	447 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1247	2166	-
300-502	D	S06	14	300	300	324 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	54	133,4	812,5	1417	-
300-502	D	S06	14	300	300	326 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	54	133,4	812,5	1433	-
300-502	D	S06	14	300	300	364 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	60,3	142,7	869	1557	-
300-502	D	S06	14	300	300	365 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	60,3	142,7	869	1557	-
300-502	D	S06	14	300	300	404 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	73	177,8	1003	1630	-
300-502	D	S06	14	300	300	405 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	73	177,8	1003	1630	-
300-502	D	S07	14	300	300	365 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	60,3	142,7	869	1637	-
300-502	D	S07	14	300	300	404 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	73	177,8	1003	1710	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
300-502	D	S07	14	300	300	405 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	73	177,8	1003	1710	-
300-502	D	S07	14	300	300	444 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1158	1961	-
300-502	D	S07	14	300	300	445 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1158	1961	-
300-502	D	S07	14	300	300	447 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1247	2166	-
300-505	K	S06	14	300	300	324 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	54	133,4	812,5	1417	-
300-505	K	S06	14	300	300	326 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	54	133,4	812,5	1433	-
300-505	K	S06	14	300	300	364 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	60,3	142,7	869	1557	-
300-505	K	S06	14	300	300	365 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	60,3	142,7	869	1557	-
300-505	K	S06	14	300	300	404 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	73	177,8	1003	1630	-
300-505	K	S06	14	300	300	405 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	73	177,8	1003	1630	-
300-505	K	S07	14	300	300	365 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	60,3	142,7	869	1637	-
300-505	K	S07	14	300	300	404 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	73	177,8	1003	1710	-
300-505	K	S07	14	300	300	405 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	73	177,8	1003	1710	-
300-505	K	S07	14	300	300	444 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1158	1961	-
300-505	K	S07	14	300	300	445 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1158	1961	-
300-505	K	S07	14	300	300	447 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1247	2166	-
300-505	K	S07	14	300	300	449 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1396	2166	-
300-505	K	S07	14	300	300	504 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	92,1	263,5	1256	2260	-
300-505	K	S07	14	300	300	505 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	92,1	263,5	1256	2260	-
300-505	K	S07	14	300	300	586 T	63	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	98,4	288,9	1551	3045	-
300-505	D	S06	14	300	300	324 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	54	133,4	812,5	1417	-
300-505	D	S06	14	300	300	326 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	54	133,4	812,5	1433	-
300-505	D	S06	14	300	300	364 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	60,3	142,7	869	1557	-
300-505	D	S06	14	300	300	365 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	60,3	142,7	869	1557	-
300-505	D	S06	14	300	300	404 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	73	177,8	1003	1630	-
300-505	D	S06	14	300	300	405 T	37	207	130	32	1045	450	597	1258	345	530	143	610	200	75	675	340	73	177,8	1003	1630	-
300-505	D	S07	14	300	300	365 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	60,3	142,7	869	1637	-
300-505	D	S07	14	300	300	404 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	73	177,8	1003	1710	-
300-505	D	S07	14	300	300	405 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	73	177,8	1003	1710	-
300-505	D	S07	14	300	300	444 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1158	1961	-
300-505	D	S07	14	300	300	445 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1158	1961	-
300-505	D	S07	14	300	300	447 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1247	2166	-
300-505	D	S07	14	300	300	449 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	85,7	209,6	1396	2166	-
300-505	D	S07	14	300	300	504 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	92,1	263,5	1256	2260	-
300-505	D	S07	14	300	300	505 T	37	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	92,1	263,5	1256	2260	-
300-505	D	S07	14	300	300	586 T	63	207	130	32	1190	450	597	1403	345	530	143	610	200	95	675	340	98,4	288,9	1551	3045	-
350-500	K	S06	14	350	350	364 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	60,3	142,7	869	1557	-
350-500	K	S06	14	350	350	365 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	60,3	142,7	869	1557	-
350-500	K	S07	14	350	350	404 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	73	177,8	1003	1910	-
350-500	K	S07	14	350	350	405 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	73	177,8	1003	1910	-
350-500	K	S07	14	350	350	444 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1158	2161	-
350-500	K	S07	14	350	350	445 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1158	2161	-
350-500	K	S07	14	350	350	447 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1247	2366	-
350-500	K	S07	14	350	350	449 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1396	2366	-
350-501	K	S06	14	350	350	324 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	54	133,4	812,5	1617	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
350-501	K	S06	14	350	350	326 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	54	133,4	812,5	1633	-
350-501	K	S06	14	350	350	364 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	60,3	142,7	869	1757	-
350-501	K	S06	14	350	350	365 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	60,3	142,7	869	1757	-
350-501	K	S06	14	350	350	404 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	73	177,8	1003	1830	-
350-501	K	S06	14	350	350	405 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	73	177,8	1003	1830	-
350-501	K	S06	14	350	350	444 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	85,7	209,6	1158	2081	-
350-501	K	S06	14	350	350	445 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	85,7	209,6	1158	2081	-
350-501	K	S07	14	350	350	447 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1247	2366	-
350-502	D	S06	14	350	350	364 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	60,3	142,7	869	1557	-
350-502	D	S06	14	350	350	365 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	60,3	142,7	869	1557	-
350-502	D	S07	14	350	350	404 T	37	287	225	35	1190	560	682	1338	400	590	143	690	200	95	785	340	73	177,8	1003	1830	-
350-502	D	S07	14	350	350	405 T	37	287	225	35	1190	560	682	1338	400	590	143	690	200	95	785	340	73	177,8	1003	1830	-
350-502	D	S07	14	350	350	404 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	73	177,8	1003	1910	-
350-502	D	S07	14	350	350	405 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	73	177,8	1003	1910	-
350-502	D	S07	14	350	350	444 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1158	2161	-
350-502	D	S07	14	350	350	445 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1158	2161	-
350-502	D	S07	14	350	350	447 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1247	2366	-
350-502	D	S07	14	350	350	449 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1396	2366	-
350-503	K	S06	14	350	350	404 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	73	177,8	1003	1830	-
350-503	K	S06	14	350	350	405 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	73	177,8	1003	1830	-
350-503	K	S07	14	350	350	444 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1158	2161	-
350-503	K	S07	14	350	350	445 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1158	2161	-
350-503	K	S07	14	350	350	447 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1247	2366	-
350-503	K	S07	14	350	350	449 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1396	2366	-
350-503	D	S06	14	350	350	404 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	73	177,8	1003	1830	-
350-503	D	S06	14	350	350	405 T	37	287	225	35	1045	560	682	1338	400	590	143	690	200	75	785	340	73	177,8	1003	1830	-
350-503	D	S07	14	350	350	444 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1158	2161	-
350-503	D	S07	14	350	350	445 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1158	2161	-
350-503	D	S07	14	350	350	447 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1247	2366	-
350-503	D	S07	14	350	350	449 T	37	287	225	35	1190	560	682	1483	400	590	143	690	200	95	785	340	85,7	209,6	1396	2366	-
350-632	K	S07	14	350	350	444 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	85,7	209,6	1158	2711	◎
350-632	K	S07	14	350	350	445 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	85,7	209,6	1158	2711	-
350-632	K	S07	14	350	350	447 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	85,7	209,6	1247	2916	-
350-632	K	S07	14	350	350	449 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	85,7	209,6	1396	2916	-
350-632	K	S07	14	350	350	504 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	92,1	263,5	1256	3010	-
350-632	K	S07	14	350	350	505 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	92,1	263,5	1256	3010	-
350-632	K	S07	14	350	350	586 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	98,4	288,9	1551	3645	-
350-632	K	S08	14	350	350	587 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	110	850	207	98,4	288,9	1551	3685	-
350-633	K	S07	14	350	350	444 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	85,7	209,6	1158	2711	◎
350-633	K	S07	14	350	350	445 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	85,7	209,6	1158	2711	-
350-633	K	S07	14	350	350	447 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	85,7	209,6	1247	2916	-
350-633	K	S07	14	350	350	449 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	85,7	209,6	1396	2916	-
350-633	K	S07	14	350	350	504 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	92,1	263,5	1256	3010	-
350-633	K	S07	14	350	350	505 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	92,1	263,5	1256	3010	-
350-633	K	S07	14	350	350	586 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	95	850	207	98,4	288,9	1551	3645	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Motor			[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	bf	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
350-633	K	S08	14	350	350	587 T	35	247	150	30	1190	560	817	1443	470	655	143	650	200	110	850	207	98,4	288,9	1551	3685	-
350-710	K	S08	14	350	350	444 T	33	272	300	36	1175	560	817	1453	570	550	143	675	200	110	850	207	85,7	209,6	1158	2991	-
350-710	K	S08	14	350	350	445 T	33	272	300	36	1175	560	817	1453	570	550	143	675	200	110	850	207	85,7	209,6	1158	2991	-
350-710	K	S08	14	350	350	447 T	33	272	300	36	1175	560	817	1453	570	550	143	675	200	110	850	207	85,7	209,6	1247	3196	-
350-710	K	S08	14	350	350	449 T	33	272	300	36	1175	560	817	1453	570	550	143	675	200	110	850	207	85,7	209,6	1396	3196	-
350-710	K	S08	14	350	350	504 T	33	272	300	36	1175	560	817	1453	570	550	143	675	200	110	850	207	92,1	263,5	1256	3290	-
350-710	K	S08	14	350	350	505 T	33	272	300	36	1175	560	817	1453	570	550	143	675	200	110	850	207	92,1	263,5	1256	3290	-
350-710	K	S08	14	350	350	586 T	33	272	300	36	1175	560	817	1453	570	550	143	675	200	110	850	207	98,4	288,9	1551	3925	-
350-710	K	S08	14	350	350	587 T	33	272	300	36	1175	560	817	1453	570	550	143	675	200	110	850	207	98,4	288,9	1551	3925	-
350-713	K	S08	14	350	350	504 T	33	287	300	36	1183	600	817	1476	570	550	143	675	200	110	890	207	92,1	263,5	1256	3290	-
350-713	K	S08	14	350	350	505 T	33	287	300	36	1183	600	817	1476	570	550	143	675	200	110	890	207	92,1	263,5	1256	3290	-
350-713	K	S08	14	350	350	586 T	33	287	300	36	1183	600	817	1476	570	550	143	675	200	110	890	207	98,4	288,9	1551	3925	-
350-713	K	S08	14	350	350	587 T	33	287	300	36	1183	600	817	1476	570	550	143	675	200	110	890	207	98,4	288,9	1551	3925	-
350-713	K	S08	14	350	350	588 T	34	287	300	36	1183	600	817	1476	570	550	143	675	200	110	890	207	98,4	288,9	1551	2445	-
350-713	K	S08	14	350	350	589 T	34	287	300	36	1183	600	817	1476	570	550	143	675	200	110	890	207	98,4	288,9	1551	2445	-
400-632	K	S08	14	500	400	444 T	33	342	250	38	1211	670	997	1559	510	790	200	945	200	110	960	207	85,7	209,6	1158	3121	-
400-632	K	S08	14	500	400	445 T	33	342	250	38	1211	670	997	1559	510	790	200	945	200	110	960	207	85,7	209,6	1158	3121	-
400-632	K	S08	14	500	400	447 T	33	342	250	38	1211	670	997	1559	510	790	200	945	200	110	960	207	85,7	209,6	1247	3326	-
400-632	K	S08	14	500	400	449 T	33	342	250	38	1211	670	997	1559	510	790	200	945	200	110	960	207	85,7	209,6	1396	3326	-
400-632	K	S08	14	500	400	504 T	33	342	250	38	1211	670	997	1559	510	790	200	945	200	110	960	207	92,1	263,5	1256	3420	-
400-632	K	S08	14	500	400	505 T	33	342	250	38	1211	670	997	1559	510	790	200	945	200	110	960	207	92,1	263,5	1256	3420	-
400-632	K	S08	14	500	400	586 T	34	342	250	38	1211	670	997	1559	510	790	200	945	200	110	960	207	98,4	288,9	1551	4230	-
400-632	K	S08	14	500	400	587 T	34	342	250	38	1211	670	997	1559	510	790	200	945	200	110	960	207	98,4	288,9	1551	4230	-
500-632	K	S08	14	500	500	444 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	85,7	209,6	1158	3931	ⓄⓇ
500-632	K	S08	14	500	500	445 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	85,7	209,6	1158	3931	-
500-632	K	S08	14	500	500	447 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	85,7	209,6	1247	4136	-
500-632	K	S08	14	500	500	449 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	85,7	209,6	1396	4136	-
500-632	K	S08	14	500	500	504 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	92,1	263,5	1256	4230	-
500-632	K	S08	14	500	500	505 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	92,1	263,5	1256	4230	-
500-632	K	S08	14	500	500	586 T	34	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	98,4	288,9	1551	5040	-
500-632	K	S08	14	500	500	587 T	34	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	98,4	288,9	1551	5040	-
500-634	K	S08	14	500	500	444 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	85,7	209,6	1158	3931	-
500-634	K	S08	14	500	500	445 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	85,7	209,6	1158	3931	-
500-634	K	S08	14	500	500	447 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	85,7	209,6	1247	4136	-
500-634	K	S08	14	500	500	449 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	85,7	209,6	1396	4136	-
500-634	K	S08	14	500	500	504 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	92,1	263,5	1256	4230	-
500-634	K	S08	14	500	500	505 T	33	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	92,1	263,5	1256	4230	-
500-634	K	S08	14	500	500	586 T	34	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	98,4	288,9	1551	5040	-
500-634	K	S08	14	500	500	587 T	34	352	250	43	1221	750	997	1579	640	815	200	955	200	110	1040	207	98,4	288,9	1551	5040	-

Installation type 3ENH

Table 6: Installation type 3ENH [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
50-215	F	S01	15	65	50	182 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	28,6	69,9	358,6	175	Ⓝ
50-215	F	S01	15	65	50	184 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	28,6	69,9	383,6	182	Ⓝ
50-215	F	S01	15	65	50	213 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	34,9	85,9	454,3	195	Ⓝ
50-215	F	S01	15	65	50	215 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	34,9	85,9	482,3	210	Ⓝ
50-215	F	S01	15	65	50	254 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	41,3	101,6	566,3	250	Ⓝ
50-215	F	S01	15	65	50	256 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	41,3	101,6	612,3	270	Ⓝ
50-216	F	S01	15	65	50	182 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	28,6	69,9	358,6	175	Ⓝ
50-216	F	S01	15	65	50	184 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	28,6	69,9	383,6	182	Ⓝ
50-216	F	S01	15	65	50	213 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	34,9	85,9	454,3	195	Ⓝ
50-216	F	S01	15	65	50	215 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	34,9	85,9	482,3	210	Ⓝ
50-216	F	S01	15	65	50	254 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	41,3	101,6	566,3	250	Ⓝ
50-216	F	S01	15	65	50	256 T	11A1	97	65	20	494,5	170	222	731,5	135	150	-	302	80	32	270	105	140	41,3	101,6	612,3	270	Ⓝ
50-250	K	S01	15	65	50	182 T	11A1	97	65	20	493	170	222	730	155	155	-	302	80	32	270	105	140	28,6	69,9	358,6	177	Ⓝ
50-250	K	S01	15	65	50	184 T	11A1	97	65	20	493	170	222	730	155	155	-	302	80	32	270	105	140	28,6	69,9	383,6	184	Ⓝ
50-250	K	S01	15	65	50	213 T	11A1	97	65	20	493	170	222	730	155	155	-	302	80	32	270	105	140	34,9	85,9	454,3	197	Ⓝ
50-250	K	S01	15	65	50	215 T	11A1	97	65	20	493	170	222	730	155	155	-	302	80	32	270	105	140	34,9	85,9	482,3	212	Ⓝ
50-251	K	S02	15	65	50	182 T	11A1	97	65	20	493	170	222	730	155	155	-	302	80	48	270	105	140	28,6	69,9	358,6	179	Ⓝ
50-251	K	S02	15	65	50	184 T	11A1	97	65	20	493	170	222	730	155	155	-	302	80	48	270	105	140	28,6	69,9	383,6	186	Ⓝ
50-251	K	S02	15	65	50	213 T	11A1	97	65	20	493	170	222	730	155	155	-	302	80	48	270	105	140	34,9	85,9	454,3	199	Ⓝ
50-251	K	S02	15	65	50	215 T	11A1	97	65	20	493	170	222	730	155	155	-	302	80	48	270	105	140	34,9	85,9	482,3	214	Ⓝ
65-215	F	S01	15	80	65	182 T	11A1	97	65	20	514	225	237	750,5	130	155	-	362	80	32	325	83	140	28,6	69,9	358,6	181	Ⓝ
65-215	F	S01	15	80	65	184 T	11A1	97	65	20	514	225	237	750,5	130	155	-	362	80	32	325	83	140	28,6	69,9	383,6	188	Ⓝ
65-215	F	S01	15	80	65	213 T	11A1	97	65	20	514	225	237	750,5	130	155	-	362	80	32	325	83	140	34,9	85,9	454,3	201	Ⓝ
65-215	F	S01	15	80	65	215 T	11A1	97	65	20	514	225	237	750,5	130	155	-	362	80	32	325	83	140	34,9	85,9	482,3	216	Ⓝ
65-215	F	S01	15	80	65	254 T	11A1	97	65	20	514	225	237	750,5	130	155	-	362	80	32	325	83	140	41,3	101,6	566,3	256	Ⓝ
65-215	F	S01	15	80	65	256 T	11A1	97	65	20	514	225	237	750,5	130	155	-	362	80	32	325	83	140	41,3	101,6	612,3	276	Ⓝ
65-216	E	S02	15	80	65	182 T	11A1	97	65	22	511	225	237	748,3	155	190	-	362	80	48	325	86	140	28,6	69,9	358,6	193	Ⓝ
65-216	E	S02	15	80	65	184 T	11A1	97	65	22	511	225	237	748,3	155	190	-	362	80	48	325	86	140	28,6	69,9	383,6	200	Ⓝ
65-216	E	S02	15	80	65	213 T	11A1	97	65	22	511	225	237	748,3	155	190	-	362	80	48	325	86	140	34,9	85,9	454,3	213	Ⓝ
65-216	E	S02	15	80	65	215 T	11A1	97	65	22	511	225	237	748,3	155	190	-	362	80	48	325	86	140	34,9	85,9	482,3	228	Ⓝ
65-216	E	S02	15	80	65	254 T	11A1	97	65	22	511	225	237	748,3	155	190	-	362	80	48	325	86	140	41,3	101,6	566,3	268	Ⓝ
65-216	E	S02	15	80	65	256 T	11A1	97	65	22	511	225	237	748,3	155	190	-	362	80	48	325	86	140	41,3	101,6	612,3	288	Ⓝ
65-217	F	S01	15	80	65	182 T	11A1	97	65	20	493	225	237	729,5	130	155	-	362	80	32	325	105	140	28,6	69,9	358,6	181	Ⓝ
65-217	F	S01	15	80	65	184 T	11A1	97	65	20	493	225	237	729,5	130	155	-	362	80	32	325	105	140	28,6	69,9	383,6	188	Ⓝ
65-217	F	S01	15	80	65	213 T	11A1	97	65	20	493	225	237	729,5	130	155	-	362	80	32	325	105	140	34,9	85,9	454,3	201	Ⓝ
65-217	F	S01	15	80	65	215 T	11A1	97	65	20	493	225	237	729,5	130	155	-	362	80	32	325	105	140	34,9	85,9	482,3	216	Ⓝ
65-217	F	S01	15	80	65	254 T	11A1	97	65	20	493	225	237	729,5	130	155	-	362	80	32	325	105	140	41,3	101,6	566,3	256	Ⓝ
65-217	F	S01	15	80	65	256 T	11A1	97	65	20	493	225	237	729,5	130	155	-	362	80	32	325	105	140	41,3	101,6	612,3	276	Ⓝ
65-250	K	S01	15	80	65	182 T	11A1	97	65	20	515	225	237	792	160	200	-	302	80	32	325	83	180	28,6	69,9	358,6	189	Ⓝ
65-250	K	S01	15	80	65	184 T	11A1	97	65	20	515	225	237	792	160	200	-	302	80	32	325	83	180	28,6	69,9	383,6	196	Ⓝ
65-250	K	S01	15	80	65	213 T	11A1	97	65	20	515	225	237	792	160	200	-	302	80	32	325	83	180	34,9	85,9	454,3	209	Ⓝ

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
65-250	K	S01	15	80	65	215 T	11A1	97	65	20	515	225	237	792	160	200	-	302	80	32	325	83	180	34,9	85,9	482,3	224	Ⓝ
80-216	F	S01	15	100	80	182 T	11A1	123	65	22	527	225	247	789,5	130	165	-	377	120	32	325	105,0	140	28,6	69,9	358,6	195	Ⓝ
80-216	F	S01	15	100	80	184 T	11A1	123	65	22	527	225	247	789,5	130	165	-	377	120	32	325	105,0	140	28,6	69,9	383,6	202	Ⓝ
80-216	F	S01	15	100	80	213 T	11A1	123	65	22	527	225	247	789,5	130	165	-	377	120	32	325	105,0	140	34,9	85,9	454,3	215	Ⓝ
80-216	F	S01	15	100	80	215 T	11A1	123	65	22	527	225	247	789,5	130	165	-	377	120	32	325	105,0	140	34,9	85,9	482,3	230	Ⓝ
80-216	E	S02	15	100	80	182 T	11A1	123	65	22	519	225	247	821,8	165	200	-	377	120	48	325	83	180	28,6	69,9	358,6	204	Ⓝ
80-216	E	S02	15	100	80	184 T	11A1	123	65	22	519	225	247	821,8	165	200	-	377	120	48	325	83	180	28,6	69,9	383,6	211	Ⓝ
80-216	E	S02	15	100	80	213 T	11A1	123	65	22	519	225	247	821,8	165	200	-	377	120	48	325	83	180	34,9	85,9	454,3	224	Ⓝ
80-216	E	S02	15	100	80	215 T	11A1	123	65	22	519	225	247	821,8	165	200	-	377	120	48	325	83	180	34,9	85,9	482,3	239	Ⓝ
80-216	E	S02	15	100	80	254 T	11A1	123	65	22	519	225	247	821,8	165	200	-	377	120	48	325	83	180	41,3	101,6	566,3	279	Ⓝ
80-216	E	S02	15	100	80	256 T	11A1	123	65	22	519	225	247	821,8	165	200	-	377	120	48	325	83	180	41,3	101,6	612,3	299	Ⓝ
80-216	E	S02	15	100	80	284 T	11A1	123	65	22	519	225	247	821,8	165	200	-	377	120	48	325	83	180	47,6	117,6	731,3	354	Ⓝ
80-217	F	S01	15	100	80	182 T	11A1	123	65	22	499	225	247	761,5	151	151	-	377	120	32	325	97,5	140	28,6	69,9	358,6	179	Ⓝ
80-217	F	S01	15	100	80	184 T	11A1	123	65	22	499	225	247	761,5	151	151	-	377	120	32	325	97,5	140	28,6	69,9	383,6	186	Ⓝ
80-217	F	S01	15	100	80	213 T	11A1	123	65	22	499	225	247	761,5	151	151	-	377	120	32	325	97,5	140	34,9	85,9	454,3	199	Ⓝ
80-217	F	S01	15	100	80	215 T	11A1	123	65	22	499	225	247	761,5	151	151	-	377	120	32	325	97,5	140	34,9	85,9	482,3	214	Ⓝ
80-217	F	S01	15	100	80	254 T	11A1	123	65	22	499	225	247	761,5	151	151	-	377	120	32	325	97,5	140	41,3	101,6	566,3	254	Ⓝ
80-217	F	S01	15	100	80	256 T	11A1	123	65	22	499	225	247	761,5	151	151	-	377	120	32	325	97,5	140	41,3	101,6	612,3	274	Ⓝ
80-217	F	S01	15	100	80	284 T	11A1	123	65	22	499	225	247	761,5	151	151	-	377	120	32	325	97,5	140	47,6	117,6	731,3	329	Ⓝ
80-250	K	S01	15	100	80	182 T	11A1	107	65	20	517	225	247	804	160	175	-	362	120	32	100	81	180	28,6	69,9	358,6	103	Ⓝ
80-250	K	S01	15	100	80	184 T	11A1	107	65	20	517	225	247	804	160	175	-	362	120	32	100	81	180	28,6	69,9	383,6	110	Ⓝ
80-250	K	S01	15	100	80	213 T	11A1	107	65	20	517	225	247	804	160	175	-	362	120	32	100	81	180	34,9	85,9	454,3	123	Ⓝ
80-250	K	S01	15	100	80	215 T	11A1	107	65	20	517	225	247	804	160	175	-	362	120	32	100	81	180	34,9	85,9	482,3	138	Ⓝ
80-252	F	S01	15	100	80	182 T	11A1	107	65	20	517	225	247	804	160	175	-	362	120	32	325	81	180	28,6	69,9	358,6	193	Ⓝ
80-252	F	S01	15	100	80	184 T	11A1	107	65	20	517	225	247	764	160	175	-	362	120	32	325	81	180	28,6	69,9	383,6	200	Ⓝ
80-252	F	S01	15	100	80	213 T	11A1	107	65	20	517	225	247	764	160	175	-	362	120	32	325	81	180	34,9	85,9	454,3	213	Ⓝ
80-252	F	S01	15	100	80	215 T	11A1	107	65	20	517	225	247	764	160	175	-	362	120	32	325	81	180	34,9	85,9	482,3	228	Ⓝ
80-253	F	S02	15	100	80	182 T	11A1	121	65	20	531	225	247	792	160	175	-	362	120	48	325	105,5	140	28,6	69,9	358,6	218	Ⓝ
80-253	F	S02	15	100	80	184 T	11A1	121	65	20	531	225	247	792	160	175	-	362	120	48	325	105,5	140	28,6	69,9	383,6	225	Ⓝ
80-253	F	S02	15	100	80	213 T	11A1	121	65	20	531	225	247	792	160	175	-	362	120	48	325	105,5	140	34,9	85,9	454,3	238	Ⓝ
80-253	F	S02	15	100	80	215 T	11A1	121	65	20	531	225	247	792	160	175	-	362	120	48	325	105,5	140	34,9	85,9	482,3	253	Ⓝ
80-253	F	S02	15	100	80	254 T	11A1	121	65	20	531	225	247	792	160	175	-	362	120	48	325	105,5	140	41,3	101,6	566,3	293	Ⓝ
80-253	F	S02	15	100	80	256 T	11A1	121	65	20	531	225	247	792	160	175	-	362	120	48	325	105,5	140	41,3	101,6	612,3	313	Ⓝ
80-253	F	S02	15	100	80	284 T	11A1	121	65	20	531	225	247	792	160	175	-	362	120	48	325	105,5	140	47,6	117,6	731,3	352	Ⓝ
80-253	F	S02	15	100	80	286 T	11A2	121	65	20	531	225	247	792	160	175	-	362	120	48	325	105,5	140	47,6	117,6	731,3	383	Ⓝ
80-253	E	S02	15	100	80	182 T	11A1	121	65	20	531	225	247	852	160	175	-	362	120	48	325	105,5	200	28,6	69,9	358,6	228	Ⓝ
80-253	E	S02	15	100	80	184 T	11A1	121	65	20	531	225	247	852	160	175	-	362	120	48	325	105,5	200	28,6	69,9	383,6	235	Ⓝ
80-253	E	S02	15	100	80	213 T	11A1	121	65	20	531	225	247	852	160	175	-	362	120	48	325	105,5	200	34,9	85,9	454,3	248	Ⓝ
80-253	E	S02	15	100	80	215 T	11A1	121	65	20	531	225	247	852	160	175	-	362	120	48	325	105,5	200	34,9	85,9	482,3	263	Ⓝ
80-253	E	S02	15	100	80	254 T	11A1	121	65	20	531	225	247	852	160	175	-	362	120	48	325	105,5	200	41,3	101,6	566,3	303	Ⓝ
80-253	E	S02	15	100	80	256 T	11A2	121	65	20	531	225	247	852	160	175	-	362	120	48	325	105,5	200	41,3	101,6	612,3	323	Ⓝ
80-253	E	S02	15	100	80	284 T	11A2	121	65	20	531	225	247	852	160	175	-	362	120	48	325	105,5	200	47,6	117,6	731,3	362	Ⓝ
80-253	E	S02	15	100	80	286 T	11A2	121	65	20	531	225	247	852	160	175	-	362	120	48	325	105,5	200	47,6	117,6	731,3	393	Ⓝ
80-315	K	S03	15	100	80	213 T	12A2	107	80	20	595	225	247	882	180	180	-	362	120	60	325	163	180	34,9	85,9	454,3	283	Ⓝ

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
80-315	K	S03	15	100	80	215 T	12A2	107	80	20	595	225	247	882	180	180	-	362	120	60	325	163	180	34,9	85,9	482,3	298	Ⓝ
80-315	K	S03	15	100	80	254 T	12A2	107	80	20	595	225	247	882	180	180	-	362	120	60	325	163	180	41,3	101,6	566,3	338	Ⓝ
80-315	K	S03	15	100	80	256 T	12A2	107	80	20	595	225	247	882	180	180	-	362	120	60	325	163	180	41,3	101,6	612,3	358	Ⓝ
80-315	K	S03	15	100	80	284 T	12A2	107	80	20	595	225	247	882	180	180	-	362	120	60	325	163	180	47,6	117,6	731,3	397	Ⓝ
80-315	K	S03	15	100	80	286 T	12A2	107	80	20	595	225	247	882	180	180	-	362	120	60	325	163	180	47,6	117,6	731,3	428	Ⓝ
80-317	F	S03	15	100	80	213 T	12A2	107	80	20	595	225	247	708	180	180	-	362	120	60	325	163	180	34,9	85,9	454,3	271	Ⓝ
80-317	F	S03	15	100	80	215 T	12A2	107	80	20	595	225	247	708	180	180	-	362	120	60	325	163	180	34,9	85,9	482,3	286	Ⓝ
80-317	F	S03	15	100	80	254 T	12A2	107	80	20	595	225	247	708	180	180	-	362	120	60	325	163	180	41,3	101,6	566,3	326	Ⓝ
80-317	F	S03	15	100	80	256 T	12A2	107	80	20	595	225	247	708	180	180	-	362	120	60	325	163	180	41,3	101,6	612,3	346	Ⓝ
80-317	F	S03	15	100	80	284 T	12A2	107	80	20	595	225	247	708	180	180	-	362	120	60	325	163	180	47,6	117,6	731,3	385	Ⓝ
80-317	F	S03	15	100	80	286 T	12A2	107	80	20	595	225	247	708	180	180	-	362	120	60	325	163	180	47,6	117,6	731,3	416	Ⓝ
80-315	D	S03	15	100	80	215 T	12A1	187	90	22	593	280	257	1030	180	205	-	442	120	60	380	165	250	34,9	85,9	482,3	350	Ⓝ
80-315	D	S03	15	100	80	254 T	12A1	187	90	22	593	280	257	1030	180	205	-	442	120	60	380	165	250	41,3	101,6	566,3	390	Ⓝ
80-315	D	S03	15	100	80	256 T	12A2	187	90	22	593	280	257	1030	180	205	-	442	120	60	380	165	250	41,3	101,6	612,3	410	Ⓝ
80-315	D	S03	15	100	80	284 T	12A2	187	90	22	593	280	257	1030	180	205	-	442	120	60	380	165	250	47,6	117,6	731,3	449	Ⓝ
80-316	D	S03	15	125	80	215 T	12A1	207	70	22	593	280	297	1050	195	225	-	462	120	60	380	185	250	34,9	85,9	482,3	350	Ⓝ
80-316	D	S03	15	125	80	254 T	12A1	207	70	22	593	280	297	1050	195	225	-	462	120	60	380	185	250	41,3	101,6	566,3	390	Ⓝ
80-316	D	S03	15	125	80	256 T	12A2	207	70	22	593	280	297	1050	195	225	-	462	120	60	380	185	250	41,3	101,6	612,3	410	Ⓝ
80-316	D	S03	15	125	80	284 T	12A2	207	70	22	593	280	297	1050	195	225	-	462	120	60	380	185	250	47,6	117,6	731,3	449	Ⓝ
80-317	D	S03	15	100	80	213 T	12A1	172	90	22	599	280	257	1021	181	201	-	442	120	60	380	165	250	34,9	85,9	454,3	337	Ⓝ
80-317	D	S03	15	100	80	215 T	12A1	172	90	22	599	280	257	1021	181	201	-	442	120	60	380	165	250	34,9	85,9	482,3	352	Ⓝ
80-317	D	S03	15	100	80	254 T	12A1	172	90	22	599	280	257	1021	181	201	-	442	120	60	380	165	250	41,3	101,6	566,3	392	Ⓝ
100-215	F	S01	15	100	100	182 T	11A2	137	80	27	536	225	277	812,5	205	240	100	392	120	32	325	102,0	140	28,6	69,9	358,6	207	-
100-215	F	S01	15	100	100	184 T	11A2	137	80	27	536	225	277	812,5	205	240	100	392	120	32	325	102,0	140	28,6	69,9	383,6	214	-
100-215	F	S01	15	100	100	213 T	11A2	137	80	27	536	225	277	812,5	205	240	100	392	120	32	325	102,0	140	34,9	85,9	454,3	227	-
100-215	F	S01	15	100	100	215 T	11A2	137	80	27	536	225	277	812,5	205	240	100	392	120	32	325	102,0	140	34,9	85,9	482,3	242	-
100-250	E	S01	15	100	100	213 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	34,9	85,9	454,3	235	-
100-250	E	S01	15	100	100	215 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	34,9	85,9	482,3	250	-
100-251	F	S02	15	100	100	213 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	34,9	85,9	454,3	242	-
100-251	F	S02	15	100	100	215 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	34,9	85,9	482,3	257	-
100-251	F	S02	15	100	100	254 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	41,3	101,6	566,3	309	-
100-251	F	S02	15	100	100	256 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	41,3	101,6	612,3	329	-
100-251	F	S02	15	100	100	284 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	47,6	117,6	731,3	368	-
100-251	F	S02	15	100	100	286 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	47,6	117,6	731,3	399	-
100-252	F	S01	15	100	100	213 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	34,9	85,9	454,3	235	-
100-252	F	S01	15	100	100	215 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	34,9	85,9	482,3	250	-
100-253	F	S02	15	100	100	213 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	34,9	85,9	454,3	242	-
100-253	F	S02	15	100	100	215 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	34,9	85,9	482,3	257	-
100-253	F	S02	15	100	100	254 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	41,3	101,6	566,3	309	-
100-253	F	S02	15	100	100	256 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	41,3	101,6	612,3	329	-
100-253	F	S02	15	100	100	284 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	47,6	117,6	731,3	368	-
100-253	F	S02	15	100	100	286 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	48	325	163	200	47,6	117,6	731,3	399	-
100-253	K	S02	15	100	100	213 T	11A1	137	80	27	533	225	277	869,8	205	282	90	392	120	48	325	163	200	34,9	85,9	454,3	258	-
100-253	K	S02	15	100	100	215 T	11A1	137	80	27	533	225	277	869,8	205	282	90	392	120	48	325	163	200	34,9	85,9	482,3	273	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
100-253	K	S02	15	100	100	254 T	12A1	137	80	27	533	225	277	869,8	205	282	90	392	120	48	325	163	200	41,3	101,6	566,3	325	-
100-253	K	S02	15	100	100	256 T	12A1	137	80	27	533	225	277	869,8	205	282	90	392	120	48	325	163	200	41,3	101,6	612,3	345	-
100-253	K	S02	15	100	100	284 T	12A1	137	80	27	533	225	277	869,8	205	282	90	392	120	48	325	163	200	47,6	117,6	731,3	384	-
100-253	K	S02	15	100	100	286 T	12A1	137	80	27	533	225	277	869,8	205	282	90	392	120	48	325	163	200	47,6	117,6	731,3	415	-
100-253	D	S02	15	150	100	213 T	12A1	202	70	27	531	280	380	933	205	330	100	457	150	48	380	227	200	34,9	85,9	454,3	336	-
100-253	D	S02	15	150	100	215 T	12A1	202	70	27	531	280	380	933	205	330	100	457	150	48	380	227	200	34,9	85,9	482,3	351	-
100-253	D	S02	15	150	100	254 T	12A2	202	70	27	531	280	380	933	205	330	100	457	150	48	380	227	200	41,3	101,6	566,3	391	-
100-253	D	S02	15	150	100	256 T	12A2	202	70	27	531	280	380	933	205	330	100	457	150	48	380	227	200	41,3	101,6	612,3	411	-
100-253	E	S02	15	100	100	213 T	11A1	137	80	27	533	225	277	869,8	205	285	90	392	120	48	325	163	200	34,9	85,9	454,3	269	-
100-253	E	S02	15	100	100	215 T	11A1	137	80	27	533	225	277	869,8	205	285	90	392	120	48	325	163	200	34,9	85,9	482,3	284	-
100-253	E	S02	15	100	100	254 T	12A1	137	80	27	533	225	277	869,8	205	285	90	392	120	48	325	163	200	41,3	101,6	566,3	324	-
100-253	E	S02	15	100	100	256 T	12A1	137	80	27	533	225	277	869,8	205	285	90	392	120	48	325	163	200	41,3	101,6	612,3	344	-
100-253	E	S02	15	100	100	284 T	12A1	137	80	27	533	225	277	869,8	205	285	90	392	120	48	325	163	200	47,6	117,6	731,3	383	-
100-253	E	S02	15	100	100	286 T	12A1	137	80	27	533	225	277	869,8	205	285	90	392	120	48	325	163	200	47,6	117,6	731,3	414	-
100-254	F	S01	15	100	100	213 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	34,9	85,9	454,3	235	-
100-254	F	S01	15	100	100	215 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	34,9	85,9	482,3	250	-
100-254	K	S01	15	100	100	213 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	34,9	85,9	454,3	235	-
100-254	K	S01	15	100	100	215 T	11A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	34,9	85,9	482,3	250	-
100-254	K	S01	15	100	100	254 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	41,3	101,6	566,3	302	-
100-254	K	S01	15	100	100	256 T	12A1	137	80	27	530	225	277	867	180	280	118	392	120	32	325	163	200	41,3	101,6	612,3	322	-
100-316	F	S03	15	150	100	213 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	34,9	85,9	454,3	298	-
100-316	F	S03	15	150	100	215 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	34,9	85,9	482,3	313	-
100-316	F	S03	15	150	100	254 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	41,3	101,6	566,3	353	-
100-316	F	S03	15	150	100	256 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	41,3	101,6	612,3	373	-
100-316	F	S03	15	150	100	284 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	47,6	117,6	731,3	428	-
100-316	F	S03	15	150	100	286 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	47,6	117,6	731,3	459	-
100-316	F	S03	15	150	100	324 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	54	133,4	812,5	512	-
100-316	F	S03	15	150	100	326 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	54	133,4	812,5	528	-
100-316	K	S03	15	150	100	213 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	34,9	85,9	454,3	298	-
100-316	K	S03	15	150	100	215 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	34,9	85,9	482,3	313	-
100-316	K	S03	15	150	100	254 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	41,3	101,6	566,3	353	-
100-316	K	S03	15	150	100	256 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	41,3	101,6	612,3	373	-
100-316	K	S03	15	150	100	284 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	47,6	117,6	731,3	428	-
100-316	K	S03	15	150	100	286 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	47,6	117,6	731,3	459	-
100-316	K	S03	15	150	100	324 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	54	133,4	812,5	512	-
100-316	K	S03	15	150	100	326 T	12A2	137	80	25	604	280	312	741,0	200	290	90	418	150	60	325	102	200	54	133,4	812,5	528	-
100-316	D	S03	15	150	100	254 T	12A2	237	70	27	605	280	337	1092	210	305	100	492	150	60	380	156	250	41,3	101,6	566,3	426	-
100-316	D	S03	15	150	100	256 T	12A2	237	70	27	605	280	337	1092	210	305	100	492	150	60	380	156	250	41,3	101,6	612,3	446	-
100-316	D	S03	15	150	100	284 T	12A2	237	70	27	605	280	337	1092	210	305	100	492	150	60	380	156	250	47,6	117,6	731,3	485	-
100-316	D	S03	15	150	100	286 T	12A2	237	70	27	605	280	337	1092	210	305	100	492	150	60	380	156	250	47,6	117,6	731,3	516	-
100-317	E	S03	15	125	100	213 T	12A2	137	80	27	617	225	322	1003,5	205	290	85	392	120	60	325	80	250	34,9	85,9	454,3	326	-
100-317	E	S03	15	125	100	215 T	12A2	137	80	27	617	225	322	1003,5	205	290	85	392	120	60	325	80	250	34,9	85,9	482,3	341	-
100-317	E	S03	15	125	100	254 T	12A2	137	80	27	617	225	322	1003,5	205	290	85	392	120	60	325	80	250	41,3	101,6	566,3	381	-
100-317	E	S03	15	125	100	256 T	12A2	137	80	27	617	225	322	1003,5	205	290	85	392	120	60	325	80	250	41,3	101,6	612,3	401	-
100-317	E	S03	15	125	100	284 T	12A2	137	80	27	617	225	322	1003,5	205	290	85	392	120	60	325	80	250	47,6	117,6	731,3	440	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
100-317	E	S03	15	125	100	286 T	12A2	137	80	27	617	225	322	1003,5	205	290	85	392	120	60	325	80	250	47,6	117,6	731,3	471	-
100-317	E	S03	15	125	100	324 T	12A2	137	80	27	617	225	322	1003,5	205	290	85	392	120	60	325	80	250	54	133,4	812,5	524	-
100-317	E	S03	15	125	100	326 T	12A2	137	80	27	617	225	322	1003,5	205	290	85	392	120	60	325	80	250	54	133,4	812,5	540	-
150-253	D	S02	15	150	150	215 T	12A2	163	150	29	574	280	397	1036,5	219	340	120	418	150	48	380	184,5	300	34,9	85,9	482,3	329	-
150-253	D	S02	15	150	150	254 T	12A2	163	150	29	574	280	397	1036,5	219	340	120	418	150	48	380	184,5	300	41,3	101,6	566,3	369	-
150-253	D	S02	15	150	150	256 T	12A2	163	150	29	574	280	397	1036,5	219	340	120	418	150	48	380	184,5	300	41,3	101,6	612,3	389	-
150-315	F	S03	15	150	150	213 T	12A2	163	100	29	641	280	397	1054	250	345	118	418	150	60	380	117	250	34,9	85,9	454,3	331	-
150-315	F	S03	15	150	150	215 T	12A2	163	100	29	641	280	397	1054	250	345	118	418	150	60	380	117	250	34,9	85,9	482,3	346	-
150-315	F	S03	15	150	150	254 T	12A2	163	100	29	641	280	397	1054	250	345	118	418	150	60	380	117	250	41,3	101,6	566,3	386	-
150-315	F	S03	15	150	150	256 T	12A2	163	100	29	641	280	397	1054	250	345	118	418	150	60	380	117	250	41,3	101,6	612,3	406	-
150-315	F	S03	15	150	150	284 T	12A2	163	100	29	641	280	397	1054	250	345	118	418	150	60	380	117	250	47,6	117,6	731,3	445	-
150-315	F	S03	15	150	150	286 T	12A2	163	100	29	641	280	397	1054	250	345	118	418	150	60	380	117	250	47,6	117,6	731,3	476	-
150-315	F	S03	15	150	150	324 T	12A2	163	100	29	641	280	397	1054	250	345	118	418	150	60	380	117	250	54	133,4	812,5	529	-
150-315	F	S03	15	150	150	326 T	12A2	163	100	29	641	280	397	1054	250	345	118	418	150	60	380	117	250	54	133,4	812,5	545	-
150-315	D	S03	15	150	150	254 T	12A2	217	150	29	617	315	397	1134	250	385	120	472	150	60	415	142	300	41,3	101,6	566,3	456	-
150-315	D	S03	15	150	150	256 T	12A2	217	150	29	617	315	397	1134	250	385	120	472	150	60	415	142	300	41,3	101,6	612,3	476	-
150-315	D	S03	15	150	150	284 T	12A2	217	150	29	617	315	397	1134	250	385	120	472	150	60	415	142	300	47,6	117,6	731,3	515	-
150-315	D	S03	15	150	150	286 T	12A2	217	150	29	617	315	397	1134	250	385	120	472	150	60	415	142	300	47,6	117,6	731,3	546	-
150-317	E	S03	15	150	150	213 T	12A2	163	100	29	641	280	367	1054	250	345	118	418	150	60	380	117	250	34,9	85,9	454,3	331	-
150-317	E	S03	15	150	150	215 T	12A2	163	100	29	641	280	367	1054	250	345	118	418	150	60	380	117	250	34,9	85,9	482,3	346	-
150-317	E	S03	15	150	150	254 T	12A2	163	100	29	641	280	367	1054	250	345	118	418	150	60	380	117	250	41,3	101,6	566,3	386	-
150-317	E	S03	15	150	150	256 T	12A2	163	100	29	641	280	367	1054	250	345	118	418	150	60	380	117	250	41,3	101,6	612,3	406	-
150-317	E	S03	15	150	150	284 T	12A2	163	100	29	641	280	367	1054	250	345	118	418	150	60	380	117	250	47,6	117,6	731,3	445	-
150-317	E	S03	15	150	150	286 T	12A2	163	100	29	641	280	367	1054	250	345	118	418	150	60	380	117	250	47,6	117,6	731,3	476	-
150-317	E	S03	15	150	150	324 T	12A2	163	100	29	641	280	367	1054	250	345	118	418	150	60	380	117	250	54	133,4	812,5	529	-
150-317	E	S03	15	150	150	326 T	12A2	163	100	29	641	280	367	1054	250	345	118	418	150	60	380	117	250	54	133,4	812,5	545	-
150-317	K	S03	15	150	150	213 T	12A2	97	100	29	618	280	367	914,5	250	350	100	352	150	60	380	142	250	34,9	85,9	454,3	348	-
150-317	K	S03	15	150	150	215 T	12A2	97	100	29	618	280	367	914,5	250	350	100	352	150	60	380	142	250	34,9	85,9	482,3	363	-
150-317	K	S03	15	150	150	254 T	12A2	97	100	29	618	280	367	914,5	250	350	100	352	150	60	380	142	250	41,3	101,6	566,3	403	-
150-317	K	S03	15	150	150	256 T	12A2	97	100	29	618	280	367	914,5	250	350	100	352	150	60	380	142	250	41,3	101,6	612,3	423	-
150-317	K	S03	15	150	150	284 T	12A2	97	100	29	618	280	367	914,5	250	350	100	352	150	60	380	142	250	47,6	117,6	731,3	462	-
150-317	K	S03	15	150	150	286 T	12A2	97	100	29	618	280	367	914,5	250	350	100	352	150	60	380	142	250	47,6	117,6	731,3	493	-
150-317	K	S03	15	150	150	324 T	12A2	97	100	29	618	280	367	914,5	250	350	100	352	150	60	380	142	250	54	133,4	812,5	546	-
150-317	K	S03	15	150	150	326 T	12A2	97	100	29	618	280	367	914,5	250	350	100	352	150	60	380	142	250	54	133,4	812,5	562	-
150-317	K	S05	15	150	150	364 T	62	97	100	29	741	280	367	1037,7	250	350	100	352	150	60	420	178	200	60,3	142,7	869	950	-
150-317	K	S05	15	150	150	365 T	62	97	100	29	741	280	367	1037,7	250	350	100	352	150	60	420	178	200	60,3	142,7	869	950	-
150-317	D	S03	15	200	150	213 T	12A1	97	100	29	618	280	367	914,5	250	350	100	452	200	60	380	142	200	34,9	85,9	454,3	348	-
150-317	D	S03	15	200	150	215 T	12A1	97	100	29	618	280	367	914,5	250	350	100	452	200	60	380	142	200	34,9	85,9	482,3	363	-
150-317	D	S03	15	200	150	254 T	12A1	97	100	29	618	280	367	914,5	250	350	100	452	200	60	380	142	200	41,3	101,6	566,3	403	-
150-317	D	S03	15	200	150	256 T	12A1	97	100	29	618	280	367	914,5	250	350	100	452	200	60	380	142	200	41,3	101,6	612,3	423	-
150-317	D	S03	15	200	150	284 T	12A2	97	100	29	618	280	367	914,5	250	350	100	452	200	60	380	142	200	47,6	117,6	731,3	462	-
150-317	D	S03	15	200	150	286 T	12A2	97	100	29	618	280	367	914,5	250	350	100	452	200	60	380	142	200	47,6	117,6	731,3	493	-
150-317	D	S03	15	200	150	324 T	12A2	97	100	29	618	280	367	914,5	250	350	100	452	200	60	380	142	200	54	133,4	812,5	546	-
150-317	D	S03	15	200	150	326 T	12A2	97	100	29	618	280	367	914,5	250	350	100	452	200	60	380	142	200	54	133,4	812,5	562	-
200-315	K	S03	15	200	200	254 T	12A1	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	41,3	101,6	566,3	438	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-315	K	S03	15	200	200	256 T	12A1	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	41,3	101,6	612,3	458	-
200-315	K	S03	15	200	200	284 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	47,6	117,6	731,3	497	-
200-315	K	S03	15	200	200	286 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	47,6	117,6	731,3	528	-
200-315	K	S03	15	200	200	324 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	54	133,4	812,5	581	-
200-315	K	S03	15	200	200	326 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	54	133,4	812,5	597	-
200-315	D	S03	15	200	200	254 T	13A2	220	185	30	666	375	497	1236	290	450	143	572	200	60	475	92	350	41,3	101,6	566,3	519	-
200-315	D	S03	15	200	200	256 T	13A2	220	185	30	666	375	497	1236	290	450	143	572	200	60	475	92	350	41,3	101,6	612,3	539	-
200-315	D	S03	15	200	200	284 T	13A2	220	185	30	666	375	497	1236	290	450	143	572	200	60	475	92	350	47,6	117,6	731,3	578	-
200-315	D	S03	15	200	200	286 T	13A2	220	185	30	666	375	497	1236	290	450	143	572	200	60	475	92	350	47,6	117,6	731,3	609	-
200-315	D	S03	15	200	200	324 T	13A2	220	185	30	666	375	497	1236	290	450	143	572	200	60	475	92	350	54	133,4	812,5	662	-
200-316	K	S03	15	200	200	254 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	41,3	101,6	566,3	438	-
200-316	K	S03	15	200	200	256 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	41,3	101,6	612,3	458	-
200-316	K	S03	15	200	200	284 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	47,6	117,6	731,3	497	-
200-316	K	S03	15	200	200	286 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	47,6	117,6	731,3	528	-
200-316	K	S03	15	200	200	324 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	54	133,4	812,5	581	-
200-316	K	S03	15	200	200	326 T	12A2	180	100	30	620	315	447	1050	240	435	118	532	200	60	415	142	250	54	133,4	812,5	597	-
200-317	K	S03	15	200	200	213 T	12A2	147	100	29	616	315	447	1012,5	260	410	118	502	200	60	415	147	250	34,9	85,9	454,3	400	-
200-317	K	S03	15	200	200	215 T	12A2	147	100	29	616	315	447	1012,5	260	410	118	502	200	60	415	147	250	34,9	85,9	482,3	415	-
200-317	K	S03	15	200	200	254 T	12A2	147	100	29	616	315	447	1012,5	260	410	118	502	200	60	415	147	250	41,3	101,6	566,3	455	-
200-317	K	S03	15	200	200	256 T	12A2	147	100	29	616	315	447	1012,5	260	410	118	502	200	60	415	147	250	41,3	101,6	612,3	475	-
200-317	K	S03	15	200	200	284 T	12A2	147	100	29	616	315	447	1012,5	260	410	118	502	200	60	415	147	250	47,6	117,6	731,3	514	-
200-317	K	S03	15	200	200	286 T	12A2	147	100	29	616	315	447	1012,5	260	410	118	502	200	60	415	147	250	47,6	117,6	731,3	545	-
200-317	K	S03	15	200	200	324 T	12A2	147	100	29	616	315	447	1012,5	260	410	118	502	200	60	415	147	250	54	133,4	812,5	598	-
200-317	K	S03	15	200	200	326 T	12A2	147	100	29	616	315	447	1012,5	260	410	118	502	200	60	415	147	250	54	133,4	812,5	614	-
200-318	K	S03	15	200	200	213 T	12A2	147	100	29	616	315	447	1012,5	260	407	118	502	200	60	415	147	250	34,9	85,9	454,3	396	-
200-318	K	S03	15	200	200	215 T	12A2	147	100	29	616	315	447	1012,5	260	407	118	502	200	60	415	147	250	34,9	85,9	482,3	411	-
200-318	K	S03	15	200	200	254 T	12A2	147	100	29	616	315	447	1012,5	260	407	118	502	200	60	415	147	250	41,3	101,6	566,3	451	-
200-318	K	S03	15	200	200	256 T	12A2	147	100	29	616	315	447	1012,5	260	407	118	502	200	60	415	147	250	41,3	101,6	612,3	471	-
200-318	K	S03	15	200	200	284 T	12A2	147	100	29	616	315	447	1012,5	260	407	118	502	200	60	415	147	250	47,6	117,6	731,3	510	-
200-318	K	S03	15	200	200	286 T	12A2	147	100	29	616	315	447	1012,5	260	407	118	502	200	60	415	147	250	47,6	117,6	731,3	541	-
200-318	K	S03	15	200	200	324 T	12A2	147	100	29	616	315	447	1012,5	260	407	118	502	200	60	415	147	250	54	133,4	812,5	594	-
200-318	K	S03	15	200	200	326 T	12A2	147	100	29	616	315	447	1012,5	260	407	118	502	200	60	415	147	250	54	133,4	812,5	610	-
100-400	K	S04	16	150	100	254 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	41,3	101,6	566,3	634	-
100-400	K	S04	16	150	100	256 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	41,3	101,6	612,3	654	-
100-400	K	S04	16	150	100	284 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	47,6	117,6	731,3	693	-
100-400	K	S04	16	150	100	286 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	47,6	117,6	731,3	724	-
100-400	K	S04	16	150	100	324 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	54	133,4	812,5	777	-
100-400	K	S04	16	150	100	326 T	66	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	54	133,4	812,5	793	-
100-400	K	S05	16	150	100	254 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	41,3	101,6	566,3	634	-
100-400	K	S05	16	150	100	256 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	41,3	101,6	612,3	654	-
100-400	K	S05	16	150	100	284 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	47,6	117,6	731,3	693	-
100-400	K	S05	16	150	100	286 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	47,6	117,6	731,3	724	-
100-400	K	S05	16	150	100	324 T	67	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	54	133,4	812,5	777	-
100-400	K	S05	16	150	100	326 T	66	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	54	133,4	812,5	793	-
100-400	K	S05	16	150	100	364 T	66	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	60,3	142,7	869	917	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
100-400	K	S05	16	150	100	365 T	66	147	112	24	746	315	397	1143	305	370	100	402	150	60	458	144	250	60,3	142,7	869	917	-
100-401	F	S04	16	125	100	254 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	41,3	101,6	566,3	594	-
100-401	F	S04	16	125	100	256 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	41,3	101,6	612,3	614	-
100-401	F	S04	16	125	100	284 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	47,6	117,6	731,3	653	-
100-401	F	S04	16	125	100	286 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	47,6	117,6	731,3	684	-
100-401	F	S04	16	125	100	324 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	54	133,4	812,5	737	-
100-401	F	S04	16	125	100	326 T	25	157	185	27	740	315	397	1147	270	370	120	412	120	60	455	180	250	54	133,4	812,5	848	-
100-401	F	S05	16	125	100	254 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	41,3	101,6	566,3	594	-
100-401	F	S05	16	125	100	256 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	41,3	101,6	612,3	614	-
100-401	F	S05	16	125	100	284 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	47,6	117,6	731,3	653	-
100-401	F	S05	16	125	100	286 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	47,6	117,6	731,3	684	-
100-401	F	S05	16	125	100	324 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	54	133,4	812,5	737	-
100-401	F	S05	16	125	100	326 T	25	157	185	27	740	315	397	1147	270	370	120	412	120	60	455	180	250	54	133,4	812,5	848	-
100-401	K	S04	16	125	100	254 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	41,3	101,6	566,3	594	-
100-401	K	S04	16	125	100	256 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	41,3	101,6	612,3	614	-
100-401	K	S04	16	125	100	284 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	47,6	117,6	731,3	653	-
100-401	K	S04	16	125	100	286 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	47,6	117,6	731,3	684	-
100-401	K	S04	16	125	100	324 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	54	133,4	812,5	737	-
100-401	K	S04	16	125	100	326 T	25	157	185	27	740	315	397	1147	270	370	120	412	120	60	455	180	250	54	133,4	812,5	848	-
100-401	K	S05	16	125	100	254 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	41,3	101,6	566,3	594	-
100-401	K	S05	16	125	100	256 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	41,3	101,6	612,3	614	-
100-401	K	S05	16	125	100	284 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	47,6	117,6	731,3	653	-
100-401	K	S05	16	125	100	286 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	47,6	117,6	731,3	684	-
100-401	K	S05	16	125	100	324 T	24	157	185	27	740	315	397	1147	270	370	120	412	120	60	458	180	250	54	133,4	812,5	737	-
100-401	K	S05	16	125	100	326 T	25	157	185	27	740	315	397	1147	270	370	120	412	120	60	455	180	250	54	133,4	812,5	848	-
100-403	D	S04	16	200	100	254 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	250	41,3	101,6	566,3	634	-
100-403	D	S04	16	200	100	256 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	250	41,3	101,6	612,3	654	-
100-403	D	S04	16	200	100	284 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	250	47,6	117,6	731,3	693	-
100-403	D	S04	16	200	100	286 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	250	47,6	117,6	731,3	724	-
100-403	D	S04	16	200	100	324 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	250	54	133,4	812,5	777	-
100-403	D	S04	16	200	100	326 T	50	147	145	24	726	315	397	873,0	305	370	100	402	150	60	458	144	250	54	133,4	812,5	793	-
100-403	D	S05	16	200	100	254 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	250	41,3	101,6	566,3	544	-
100-403	D	S05	16	200	100	256 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	250	41,3	101,6	612,3	564	-
100-403	D	S05	16	200	100	284 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	250	47,6	117,6	731,3	603	-
100-403	D	S05	16	200	100	286 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	250	47,6	117,6	731,3	634	-
100-403	D	S05	16	200	100	324 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	250	54	133,4	812,5	687	-
100-403	D	S05	16	200	100	326 T	51	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	250	54	133,4	812,5	703	-
100-403	D	S05	16	200	100	364 T	52	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	250	60,3	142,7	869	827	-
100-403	D	S05	16	200	100	365 T	52	147	145	24	726	315	397	873,0	305	370	100	402	150	60	415	144	250	60,3	142,7	869	827	-
150-400	D	S05	16	200	150	284 T	67	267	185	28	725	315	397	1242	254	365	100	622	200	60	458	196	250	47,6	117,6	731,3	828	-
150-400	D	S05	16	200	150	286 T	67	267	185	28	725	315	397	1242	254	365	100	622	200	60	458	196	250	47,6	117,6	731,3	859	-
150-400	D	S05	16	200	150	324 T	67	267	185	28	725	315	397	1242	254	365	100	622	200	60	458	196	250	54	133,4	812,5	912	-
150-400	D	S05	16	200	150	326 T	25	267	185	28	725	315	397	1242	254	365	100	622	200	60	455	196	250	54	133,4	812,5	1023	-
150-400	D	S05	16	200	150	364 T	25	267	185	28	725	315	397	1242	254	365	100	622	200	60	455	196	250	60,3	142,7	869	1147	-
150-400	K	S04	16	200	150	254 T	67	167	100	28	721	355	497	1188	300	390	100	522	200	60	498	199	300	41,3	101,6	566,3	749	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
150-400	K	S04	16	200	150	256 T	67	167	100	28	721	355	497	1188	300	390	100	522	200	60	498	199	300	41,3	101,6	612,3	769	-
150-400	K	S04	16	200	150	284 T	67	167	100	28	721	355	497	1188	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	808	-
150-400	K	S04	16	200	150	286 T	67	167	100	28	721	355	497	1188	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	839	-
150-400	K	S04	16	200	150	324 T	67	167	100	28	721	355	497	1188	300	390	100	522	200	60	495	199	300	54	133,4	812,5	987	-
150-400	K	S04	16	200	150	326 T	66	167	100	28	721	355	497	1188	300	390	100	522	200	60	495	199	300	54	133,4	812,5	1003	-
150-400	K	S05	16	200	150	284 T	67	167	100	28	721	355	497	1188	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	808	-
150-400	K	S05	16	200	150	286 T	67	167	100	28	721	355	497	1188	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	839	-
150-400	K	S05	16	200	150	324 T	67	167	100	28	721	355	497	1188	300	390	100	522	200	60	495	199	300	54	133,4	812,5	987	-
150-400	K	S05	16	200	150	326 T	66	167	100	28	721	355	497	1188	300	390	100	522	200	60	495	199	300	54	133,4	812,5	1003	-
150-400	K	S05	16	200	150	364 T	66	167	100	28	721	355	497	1188	300	390	100	522	200	60	495	199	300	60,3	142,7	869	1127	-
150-400	K	S05	16	200	150	365 T	66	167	100	28	721	355	497	1188	300	390	100	522	200	60	495	199	300	60,3	142,7	869	1127	-
150-400	K	S05	16	200	150	404 T	68	167	100	28	721	355	497	1188	300	390	100	522	200	60	495	199	300	73	177,8	1003	1215	-
150-400	K	S05	16	200	150	405 T	68	167	100	28	721	355	497	1188	300	390	100	522	200	60	495	199	300	73	177,8	1003	1215	-
150-401	F	S04	16	150	150	254 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	41,3	101,6	566,3	679	◎
150-401	F	S04	16	150	150	256 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	41,3	101,6	612,3	699	◎
150-401	F	S04	16	150	150	284 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	47,6	117,6	731,3	738	◎
150-401	F	S04	16	150	150	286 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	47,6	117,6	731,3	769	◎
150-401	F	S04	16	150	150	324 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	54	133,4	812,5	917	◎
150-401	F	S04	16	150	150	326 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	54	133,4	812,5	933	◎
150-401	F	S05	16	150	150	254 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	41,3	101,6	566,3	679	◎◎
150-401	F	S05	16	150	150	256 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	41,3	101,6	612,3	699	◎◎
150-401	F	S05	16	150	150	284 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	47,6	117,6	731,3	738	◎◎
150-401	F	S05	16	150	150	286 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	47,6	117,6	731,3	769	◎◎
150-401	F	S05	16	150	150	324 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	54	133,4	812,5	917	◎◎
150-401	F	S05	16	150	150	326 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	54	133,4	812,5	933	◎◎
150-401	F	S05	16	150	150	364 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	60,3	142,7	869	1057	◎◎
150-401	F	S05	16	150	150	365 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	60,3	142,7	869	1057	◎◎
150-401	K	S04	16	150	150	254 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	41,3	101,6	566,3	679	◎
150-401	K	S04	16	150	150	256 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	41,3	101,6	612,3	699	◎
150-401	K	S04	16	150	150	284 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	47,6	117,6	731,3	738	◎
150-401	K	S04	16	150	150	286 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	47,6	117,6	731,3	769	◎
150-401	K	S04	16	150	150	324 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	54	133,4	812,5	917	◎
150-401	K	S04	16	150	150	326 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	54	133,4	812,5	933	◎
150-401	K	S05	16	150	150	254 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	41,3	101,6	566,3	679	◎◎
150-401	K	S05	16	150	150	256 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	41,3	101,6	612,3	699	◎◎
150-401	K	S05	16	150	150	284 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	47,6	117,6	731,3	738	◎◎
150-401	K	S05	16	150	150	286 T	24	177	100	28	750	355	497	1227	325	360	120	432	150	60	498	170	300	47,6	117,6	731,3	769	◎◎
150-401	K	S05	16	150	150	324 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	54	133,4	812,5	917	◎◎
150-401	K	S05	16	150	150	326 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	54	133,4	812,5	933	◎◎
150-401	K	S05	16	150	150	364 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	60,3	142,7	869	1057	◎◎
150-401	K	S05	16	150	150	365 T	25	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	60,3	142,7	869	1057	◎◎
150-401	K	S05	16	150	150	404 T	26	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	73	177,8	1003	1145	-
150-401	K	S05	16	150	150	405 T	26	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	73	177,8	1003	1145	-
150-401	K	S05	16	150	150	444 T	26	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	85,7	209,6	1158	1396	-
150-401	K	S05	16	150	150	445 T	26	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	85,7	209,6	1158	1396	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
150-401	K	S05	16	150	150	447 T	26	177	100	28	750	355	497	1227	325	360	120	432	150	60	495	170	300	85,7	209,6	1247	1601	-
150-401	D	S06	16	250	150	326 T	39	324	185	28	968	355	472	1592	280	420	120	729	200	75	495	175	300	54	133,4	812,5	1253	-
150-401	D	S06	16	250	150	364 T	39	324	185	28	968	355	472	1592	280	420	120	729	200	75	495	175	300	60,3	142,7	869	1377	-
150-401	D	S06	16	250	150	365 T	39	324	185	28	968	355	472	1592	280	420	120	729	200	75	495	175	300	60,3	142,7	869	1377	-
150-401	D	S06	16	250	150	404 T	39	324	185	28	968	355	472	1592	280	420	120	729	200	75	495	175	300	73	177,8	1003	1450	-
150-401	D	S06	16	250	150	405 T	39	324	185	28	968	355	472	1592	280	420	120	729	200	75	495	175	300	73	177,8	1003	1450	-
150-403	K	S04	16	200	150	254 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	41,3	101,6	566,3	749	-
150-403	K	S04	16	200	150	256 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	41,3	101,6	612,3	769	-
150-403	K	S04	16	200	150	284 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	808	-
150-403	K	S04	16	200	150	286 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	839	-
150-403	K	S04	16	200	150	324 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	54	133,4	812,5	987	-
150-403	K	S04	16	200	150	326 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	54	133,4	812,5	1003	-
150-403	K	S05	16	200	150	284 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	808	-
150-403	K	S05	16	200	150	286 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	839	-
150-403	K	S05	16	200	150	324 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	54	133,4	812,5	987	-
150-403	K	S05	16	200	150	326 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	54	133,4	812,5	1003	-
150-403	K	S05	16	200	150	364 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	60,3	142,7	869	1127	-
150-403	K	S05	16	200	150	365 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	60,3	142,7	869	1127	-
150-403	K	S05	16	200	150	404 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	73	177,8	1003	1215	-
150-403	K	S05	16	200	150	405 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	73	177,8	1003	1215	-
150-403	K	S05	16	200	150	444 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	85,7	209,6	1158	1466	-
150-403	K	S05	16	200	150	445 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	85,7	209,6	1158	1466	-
150-403	K	S05	16	200	150	447 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	85,7	209,6	1247	1671	-
151-403	K	S04	16	200	150	254 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	41,3	101,6	566,3	749	-
151-403	K	S04	16	200	150	256 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	41,3	101,6	612,3	769	-
151-403	K	S04	16	200	150	284 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	808	-
151-403	K	S04	16	200	150	286 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	839	-
151-403	K	S04	16	200	150	324 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	54	133,4	812,5	987	-
151-403	K	S04	16	200	150	326 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	54	133,4	812,5	1003	-
151-403	K	S05	16	200	150	284 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	808	-
151-403	K	S05	16	200	150	286 T	50	167	100	28	721	355	497	1138	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	839	-
151-403	K	S05	16	200	150	324 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	54	133,4	812,5	987	-
151-403	K	S05	16	200	150	326 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	54	133,4	812,5	1003	-
151-403	K	S05	16	200	150	364 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	60,3	142,7	869	1127	-
151-403	K	S05	16	200	150	365 T	51	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	60,3	142,7	869	1127	-
151-403	K	S05	16	200	150	404 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	73	177,8	1003	1215	-
151-403	K	S05	16	200	150	405 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	73	177,8	1003	1215	-
151-403	K	S05	16	200	150	444 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	85,7	209,6	1158	1466	-
151-403	K	S05	16	200	150	445 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	85,7	209,6	1158	1466	-
151-403	K	S05	16	200	150	447 T	52	167	100	28	721	355	497	1138	300	390	100	522	200	60	495	199	300	85,7	209,6	1247	1671	-
150-403	D	S04	16	200	150	254 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	41,3	101,6	566,3	749	-
150-403	D	S04	16	200	150	256 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	41,3	101,6	612,3	769	-
150-403	D	S04	16	200	150	284 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	808	-
150-403	D	S04	16	200	150	286 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	839	-
150-403	D	S04	16	200	150	324 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	54	133,4	812,5	892	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
150-403	D	S04	16	200	150	326 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	54	133,4	812,5	908	-
150-403	D	S05	16	200	150	284 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	808	-
150-403	D	S05	16	200	150	286 T	50	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	47,6	117,6	731,3	839	-
150-403	D	S05	16	200	150	324 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	54	133,4	812,5	892	-
150-403	D	S05	16	200	150	326 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	54	133,4	812,5	908	-
150-403	D	S05	16	200	150	364 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	60,3	142,7	869	1032	-
150-403	D	S05	16	200	150	365 T	51	167	100	28	721	355	497	888,0	300	390	100	522	200	60	498	199	300	60,3	142,7	869	1032	-
150-403	D	S05	16	200	150	404 T	52	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	300	73	177,8	1003	1200	-
150-403	D	S05	16	200	150	405 T	52	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	300	73	177,8	1003	1200	-
150-403	D	S05	16	200	150	444 T	52	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	300	85,7	209,6	1158	1451	-
150-403	D	S05	16	200	150	445 T	52	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	300	85,7	209,6	1158	1451	-
150-403	D	S05	16	200	150	447 T	52	167	100	28	721	355	497	888,0	300	390	100	522	200	60	495	199	300	85,7	209,6	1247	1656	-
150-503	K	S06	16	150	150	404 T	28	157	100	28	1003	375	497	1360	305	380	118	410	150	75	535	410	200	73	177,8	1003	1360	-
150-503	K	S06	16	150	150	405 T	28	157	100	28	1003	375	497	1360	305	380	118	410	150	75	535	410	200	73	177,8	1003	1360	-
150-503	K	S06	16	150	150	444 T	28	157	100	28	1003	375	497	1360	305	380	118	410	150	75	535	410	200	85,7	209,6	1158	1611	-
150-503	K	S06	16	150	150	445 T	28	157	100	28	1003	375	497	1360	305	380	118	410	150	75	535	410	200	85,7	209,6	1158	1611	-
150-503	K	S06	16	150	150	447 T	28	157	100	28	1003	375	497	1360	305	380	118	410	150	75	535	410	200	85,7	209,6	1247	1816	-
150-503	K	S07	16	150	150	447 T	60	157	100	28	1148	375	497	1505	305	380	118	410	150	95	535	410	200	85,7	209,6	1396	1981	-
150-503	K	S07	16	150	150	449 T	60	157	100	28	1148	375	497	1505	305	380	118	410	150	95	535	410	200	85,7	209,6	1396	1981	-
150-503	D	S06	16	200	150	404 T	28	157	100	28	1003	375	497	1360	305	380	118	510	200	75	535	410	200	73	177,8	1003	1360	-
150-503	D	S06	16	200	150	405 T	28	157	100	28	1003	375	497	1360	305	380	118	510	200	75	535	410	200	73	177,8	1003	1360	-
150-503	D	S06	16	200	150	444 T	28	157	100	28	1003	375	497	1360	305	380	118	510	200	75	535	410	200	85,7	209,6	1158	1611	-
150-503	D	S06	16	200	150	445 T	28	157	100	28	1003	375	497	1360	305	380	118	510	200	75	535	410	200	85,7	209,6	1158	1611	-
150-503	D	S06	16	200	150	447 T	28	157	100	28	1003	375	497	1360	305	380	118	510	200	75	535	410	200	85,7	209,6	1247	1816	-
150-503	D	S07	16	200	150	447 T	60	157	100	28	1148	375	497	1505	305	380	118	510	200	95	535	410	200	85,7	209,6	1396	1981	-
150-503	D	S07	16	200	150	449 T	60	157	100	28	1148	375	497	1505	305	380	118	510	200	95	535	410	200	85,7	209,6	1396	1981	-
200-330	K	S04	16	250	200	254 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	41,3	101,6	566,3	694	-
200-330	K	S04	16	250	200	256 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	41,3	101,6	612,3	714	-
200-330	K	S04	16	250	200	284 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	47,6	117,6	731,3	753	-
200-330	K	S04	16	250	200	286 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	47,6	117,6	731,3	784	-
200-330	K	S04	16	250	200	324 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	54	133,4	812,5	837	-
200-330	K	S04	16	250	200	326 T	25	177	185	30	755	355	497	1182	300	425	118	582	200	60	495	165	250	54	133,4	812,5	948	-
200-330	K	S05	16	250	200	254 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	41,3	101,6	566,3	694	-
200-330	K	S05	16	250	200	256 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	41,3	101,6	612,3	714	-
200-330	K	S05	16	250	200	284 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	47,6	117,6	731,3	753	-
200-330	K	S05	16	250	200	286 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	47,6	117,6	731,3	784	-
200-330	K	S05	16	250	200	324 T	24	177	185	30	755	355	497	1182	300	425	118	582	200	60	498	165	250	54	133,4	812,5	837	-
200-330	K	S05	16	250	200	326 T	25	177	185	30	755	355	497	1182	300	425	118	582	200	60	495	165	250	54	133,4	812,5	948	-
200-330	K	S05	16	250	200	364 T	25	177	185	30	755	355	497	1182	300	425	118	582	200	60	495	165	250	60,3	142,7	869	1072	-
200-330	K	S05	16	250	200	365 T	25	177	185	30	755	355	497	1182	300	425	118	582	200	60	495	165	250	60,3	142,7	869	1072	-
200-400	D	S06	16	250	200	326 T	43	302	180	30	985	450	517	1687	320	550	125	706	200	75	590	145	400	54	133,4	812,5	1278	-
200-400	D	S06	16	250	200	364 T	43	302	180	30	985	450	517	1687	320	550	125	706	200	75	590	145	400	60,3	142,7	869	1402	-
200-400	D	S06	16	250	200	365 T	43	302	180	30	985	450	517	1687	320	550	125	706	200	75	590	145	400	60,3	142,7	869	1402	-
200-400	D	S06	16	250	200	404 T	43	302	180	30	985	450	517	1687	320	550	125	706	200	75	590	145	400	73	177,8	1003	1475	-
200-401	K	S04	16	200	200	284 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	47,6	117,6	731,3	748	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-401	K	S04	16	200	200	286 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	47,6	117,6	731,3	779	-
200-401	K	S04	16	200	200	324 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	54	133,4	812,5	832	-
200-401	K	S04	16	200	200	326 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	54	133,4	812,5	848	-
200-401	K	S05	16	200	200	284 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	47,6	117,6	731,3	748	◎◎
200-401	K	S05	16	200	200	286 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	47,6	117,6	731,3	779	-
200-401	K	S05	16	200	200	324 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	54	133,4	812,5	832	-
200-401	K	S05	16	200	200	326 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	54	133,4	812,5	848	-
200-401	K	S05	16	200	200	364 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	60,3	142,7	869	972	-
200-401	K	S05	16	200	200	365 T	24	222	100	30	800	355	497	1372	350	370	200	577	200	60	498	120	350	60,3	142,7	869	972	-
200-401	K	S05	16	200	200	404 T	25	222	100	30	800	355	497	1372	350	370	200	577	200	60	495	120	350	73	177,8	1003	1140	-
200-401	K	S05	16	200	200	405 T	25	222	100	30	800	355	497	1372	350	370	200	577	200	60	495	120	350	73	177,8	1003	1140	-
200-401	K	S05	16	200	200	444 T	25	222	100	30	800	355	497	1372	350	370	200	577	200	60	495	120	350	85,7	209,6	1158	1391	-
200-402	K	S04	16	200	200	284 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	47,6	117,6	731,3	843	-
200-402	K	S04	16	200	200	286 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	47,6	117,6	731,3	874	-
200-402	K	S04	16	200	200	324 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	54	133,4	812,5	927	-
200-402	K	S04	16	200	200	326 T	66	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	54	133,4	812,5	943	-
200-402	K	S05	16	200	200	284 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	47,6	117,6	731,3	843	-
200-402	K	S05	16	200	200	286 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	47,6	117,6	731,3	874	-
200-402	K	S05	16	200	200	324 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	54	133,4	812,5	927	-
200-402	K	S05	16	200	200	326 T	66	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	54	133,4	812,5	943	-
200-402	K	S05	16	200	200	364 T	66	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	60,3	142,7	869	1067	-
200-402	K	S05	16	200	200	365 T	68	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	60,3	142,7	869	1082	-
200-402	K	S05	16	200	200	404 T	68	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	73	177,8	1003	1155	-
200-402	K	S05	16	200	200	405 T	68	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	73	177,8	1003	1155	-
200-402	K	S05	16	200	200	444 T	68	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	85,7	209,6	1158	1406	-
200-402	K	S05	16	200	200	445 T	68	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	85,7	209,6	1158	1406	-
200-402	K	S06	16	200	200	444 T	68	157	105	30	953	375	497	1460	325	440	140	512	200	75	535	167	350	85,7	209,6	1158	1431	-
200-402	K	S06	16	200	200	445 T	68	157	105	30	953	375	497	1460	325	440	140	512	200	75	535	167	350	85,7	209,6	1158	1431	-
200-402	D	S04	16	250	200	284 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	47,6	117,6	731,3	748	-
200-402	D	S04	16	250	200	286 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	47,6	117,6	731,3	779	-
200-402	D	S04	16	250	200	324 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	54	133,4	812,5	832	-
200-402	D	S04	16	250	200	326 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	54	133,4	812,5	848	-
200-402	D	S05	16	250	200	284 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	47,6	117,6	731,3	748	-
200-402	D	S05	16	250	200	286 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	47,6	117,6	731,3	779	-
200-402	D	S05	16	250	200	324 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	54	133,4	812,5	832	-
200-402	D	S05	16	250	200	326 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	54	133,4	812,5	848	-
200-402	D	S05	16	250	200	364 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	60,3	142,7	869	972	-
200-402	D	S05	16	250	200	365 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	60,3	142,7	869	972	-
200-402	D	S05	16	250	200	404 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	350	73	177,8	1003	1140	-
200-402	D	S05	16	250	200	405 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	350	73	177,8	1003	1140	-
200-402	D	S05	16	250	200	444 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	350	85,7	209,6	1158	1391	-
200-402	D	S05	16	250	200	445 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	350	85,7	209,6	1158	1391	-
200-402	D	S06	16	250	200	444 T	65	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	350	85,7	209,6	1158	1421	-
200-402	D	S06	16	250	200	445 T	65	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	350	85,7	209,6	1158	1421	-
200-403	K	S04	16	200	200	284 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	47,6	117,6	731,3	843	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-403	K	S04	16	200	200	286 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	47,6	117,6	731,3	874	-
200-403	K	S04	16	200	200	324 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	54	133,4	812,5	927	-
200-403	K	S04	16	200	200	326 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	54	133,4	812,5	943	-
200-403	K	S05	16	200	200	284 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	47,6	117,6	731,3	843	◎
200-403	K	S05	16	200	200	286 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	47,6	117,6	731,3	874	-
200-403	K	S05	16	200	200	324 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	54	133,4	812,5	927	-
200-403	K	S05	16	200	200	326 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	54	133,4	812,5	943	-
200-403	K	S05	16	200	200	364 T	51	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	60,3	142,7	869	1067	-
200-403	K	S05	16	200	200	365 T	52	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	60,3	142,7	869	1082	-
200-403	K	S05	16	200	200	404 T	52	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	73	177,8	1003	1155	-
200-403	K	S05	16	200	200	405 T	52	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	73	177,8	1003	1155	-
200-403	K	S05	16	200	200	444 T	52	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	85,7	209,6	1158	1406	-
200-403	K	S05	16	200	200	445 T	52	157	105	30	723	375	497	1230	325	440	140	512	200	60	515	167	350	85,7	209,6	1158	1406	-
200-403	K	S06	16	200	200	444 T	65	157	105	30	953	375	497	1460	325	440	140	512	200	75	535	167	350	85,7	209,6	1158	1431	-
200-403	K	S06	16	200	200	445 T	65	157	105	30	953	375	497	1460	325	440	140	512	200	75	535	167	350	85,7	209,6	1158	1431	-
200-403	K	S06	16	200	200	447 T	65	157	105	30	953	375	497	1460	325	440	140	512	200	75	535	167	350	85,7	209,6	1247	1636	-
200-403	K	S06	16	200	200	449 T	65	157	105	30	953	375	497	1460	325	440	140	512	200	75	535	167	350	85,7	209,6	1396	1636	-
200-405	D	S04	16	250	200	284 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	47,6	117,6	731,3	748	-
200-405	D	S04	16	250	200	286 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	47,6	117,6	731,3	779	-
200-405	D	S04	16	250	200	324 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	54	133,4	812,5	832	-
200-405	D	S04	16	250	200	326 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	54	133,4	812,5	848	-
200-405	D	S05	16	250	200	284 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	47,6	117,6	731,3	748	◎
200-405	D	S05	16	250	200	286 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	47,6	117,6	731,3	779	-
200-405	D	S05	16	250	200	324 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	54	133,4	812,5	832	-
200-405	D	S05	16	250	200	326 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	54	133,4	812,5	848	-
200-405	D	S05	16	250	200	364 T	51	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	60,3	142,7	869	972	-
200-405	D	S05	16	250	200	365 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	518	167	350	60,3	142,7	869	972	-
200-405	D	S05	16	250	200	404 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	350	73	177,8	1003	1140	-
200-405	D	S05	16	250	200	405 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	350	73	177,8	1003	1140	-
200-405	D	S05	16	250	200	444 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	350	85,7	209,6	1158	1391	-
200-405	D	S05	16	250	200	445 T	52	222	105	30	723	375	497	945,0	325	440	140	512	200	60	515	167	350	85,7	209,6	1158	1391	-
200-405	D	S06	16	250	200	444 T	65	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	350	85,7	209,6	1158	1421	-
200-405	D	S06	16	250	200	445 T	65	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	350	85,7	209,6	1158	1421	-
200-405	D	S06	16	250	200	447 T	65	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	350	85,7	209,6	1247	1626	-
200-405	D	S06	16	250	200	449 T	65	222	105	30	953	375	497	1175,0	325	440	140	512	200	75	535	167	350	85,7	209,6	1396	1626	-
200-502	K	S06	16	200	200	364 T	27	197	120	30	1015	375	557	1462	335	470	118	550	200	75	535	115	250	60,3	142,7	869	1417	-
200-502	K	S06	16	200	200	365 T	27	197	120	30	1015	375	557	1462	335	470	118	550	200	75	535	115	250	60,3	142,7	869	1417	-
200-502	K	S06	16	200	200	404 T	28	197	120	30	1015	375	557	1462	335	470	118	550	200	75	535	115	250	73	177,8	1003	1500	-
200-502	K	S06	16	200	200	405 T	28	197	120	30	1015	375	557	1462	335	470	118	550	200	75	535	115	250	73	177,8	1003	1500	-
200-502	K	S07	16	200	200	364 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	60,3	142,7	869	1542	®
200-502	K	S07	16	200	200	365 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	60,3	142,7	869	1542	-
200-502	K	S07	16	200	200	404 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	73	177,8	1003	1615	-
200-502	K	S07	16	200	200	405 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	73	177,8	1003	1615	-
200-502	K	S07	16	200	200	444 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	85,7	209,6	1158	1866	-
200-502	K	S07	16	200	200	445 T	30	197	120	30	1160	375	557	1607	335	470	118	550	200	95	600	225	250	85,7	209,6	1158	2186	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-502	K	S07	16	200	200	447 T	30	197	120	30	1160	375	557	1607	335	470	118	550	200	95	600	225	250	85,7	209,6	1247	2391	-
200-503	K	S06	16	200	200	364 T	27	197	120	30	1015	375	557	1462	335	470	118	550	200	75	535	115	250	60,3	142,7	869	1417	-
200-503	K	S06	16	200	200	365 T	27	197	120	30	1015	375	557	1462	335	470	118	550	200	75	535	115	250	60,3	142,7	869	1417	-
200-503	K	S06	16	200	200	404 T	28	197	120	30	1015	375	557	1462	335	470	118	550	200	75	535	115	250	73	177,8	1003	1500	-
200-503	K	S06	16	200	200	405 T	28	197	120	30	1015	375	557	1462	335	470	118	550	200	75	535	115	250	73	177,8	1003	1500	-
200-503	K	S07	16	200	200	364 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	60,3	142,7	869	1542	Ⓡ
200-503	K	S07	16	200	200	365 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	60,3	142,7	869	1542	-
200-503	K	S07	16	200	200	404 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	73	177,8	1003	1615	-
200-503	K	S07	16	200	200	405 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	73	177,8	1003	1615	-
200-503	K	S07	16	200	200	444 T	28	197	120	30	1160	375	557	1607	335	470	118	550	200	95	535	225	250	85,7	209,6	1158	1866	-
200-503	K	S07	16	200	200	445 T	30	197	120	30	1160	375	557	1607	335	470	118	550	200	95	600	225	250	85,7	209,6	1158	2186	-
200-503	K	S07	16	200	200	447 T	30	197	120	30	1160	375	557	1607	335	470	118	550	200	95	600	225	250	85,7	209,6	1247	2391	-
200-503	K	S07	16	200	200	449 T	30	197	120	30	1160	375	557	1607	335	470	118	550	200	95	600	225	250	85,7	209,6	1396	2391	-
200-503	K	S07	16	200	200	504 T	30	197	120	30	1160	375	557	1607	335	470	118	550	200	95	600	225	250	92,1	263,5	1256	2485	-
200-503	K	S07	16	200	200	505 T	30	197	120	30	1160	375	557	1607	335	470	118	550	200	95	600	225	250	92,1	263,5	1256	2485	-
200-503	K	S07	16	200	200	586 T	30	197	120	30	1160	375	557	1607	335	470	118	550	200	95	600	225	250	98,4	288,9	1551	3120	-
200-503	D	S06	16	250	200	364 T	27	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	60,3	142,7	869	1417	-
200-503	D	S06	16	250	200	365 T	27	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	60,3	142,7	869	1417	-
200-503	D	S06	16	250	200	404 T	28	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	73	177,8	1003	1500	-
200-503	D	S06	16	250	200	405 T	28	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	73	177,8	1003	1500	-
200-503	D	S07	16	250	200	364 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	60,3	142,7	869	1542	-
200-503	D	S07	16	250	200	365 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	60,3	142,7	869	1542	Ⓡ
200-503	D	S07	16	250	200	404 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	73	177,8	1003	1615	-
200-503	D	S07	16	250	200	405 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	73	177,8	1003	1615	-
200-503	D	S07	16	250	200	444 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	85,7	209,6	1158	1866	-
200-503	D	S07	16	250	200	445 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	85,7	209,6	1158	2186	-
200-503	D	S07	16	250	200	447 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	85,7	209,6	1247	2391	-
200-503	D	S07	16	250	200	449 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	85,7	209,6	1396	2391	-
200-503	D	S07	16	250	200	504 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	92,1	263,5	1256	2485	-
200-503	D	S07	16	250	200	505 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	92,1	263,5	1256	2485	-
200-503	D	S07	16	250	200	586 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	98,4	288,9	1551	3120	-
200-504	K	S06	16	250	200	364 T	27	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	60,3	142,7	869	1417	-
200-504	K	S06	16	250	200	365 T	27	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	60,3	142,7	869	1417	-
200-504	K	S06	16	250	200	404 T	28	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	73	177,8	1003	1500	-
200-504	K	S06	16	250	200	405 T	28	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	73	177,8	1003	1500	-
200-504	K	S07	16	250	200	364 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	60,3	142,7	869	1542	Ⓡ
200-504	K	S07	16	250	200	365 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	60,3	142,7	869	1542	-
200-504	K	S07	16	250	200	404 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	73	177,8	1003	1615	-
200-504	K	S07	16	250	200	405 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	73	177,8	1003	1615	-
200-504	K	S07	16	250	200	444 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	85,7	209,6	1158	1866	-
200-504	K	S07	16	250	200	445 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	85,7	209,6	1158	2186	-
200-504	K	S07	16	250	200	447 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	85,7	209,6	1247	2391	-
200-505	K	S06	16	250	200	364 T	27	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	60,3	142,7	869	1417	-
200-505	K	S06	16	250	200	365 T	27	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	60,3	142,7	869	1417	-
200-505	K	S06	16	250	200	404 T	28	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	73	177,8	1003	1500	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
200-505	K	S06	16	250	200	405 T	28	197	120	30	1015	375	557	1462	335	470	118	600	200	75	535	115	250	73	177,8	1003	1500	-
200-505	K	S07	16	250	200	364 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	60,3	142,7	869	1542	®
200-505	K	S07	16	250	200	365 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	60,3	142,7	869	1542	-
200-505	K	S07	16	250	200	404 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	73	177,8	1003	1615	-
200-505	K	S07	16	250	200	405 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	73	177,8	1003	1615	-
200-505	K	S07	16	250	200	444 T	28	197	120	30	1160	375	557	1607	335	470	118	600	200	95	535	225	250	85,7	209,6	1158	1866	-
200-505	K	S07	16	250	200	445 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	85,7	209,6	1158	2186	-
200-505	K	S07	16	250	200	447 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	85,7	209,6	1247	2391	-
200-505	K	S07	16	250	200	449 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	85,7	209,6	1396	2391	-
200-505	K	S07	16	250	200	504 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	92,1	263,5	1256	2485	-
200-505	K	S07	16	250	200	505 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	92,1	263,5	1256	2485	-
200-505	K	S07	16	250	200	586 T	30	197	120	30	1160	375	557	1607	335	470	118	600	200	95	600	225	250	98,4	288,9	1551	3120	-
250-400	K	S04	16	250	250	284 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	908	-
250-400	K	S04	16	250	250	286 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	939	-
250-400	K	S04	16	250	250	324 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	992	-
250-400	K	S04	16	250	250	326 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	1008	-
250-400	K	S05	16	250	250	284 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	908	-
250-400	K	S05	16	250	250	286 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	939	-
250-400	K	S05	16	250	250	324 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	992	-
250-400	K	S05	16	250	250	326 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	1008	-
250-400	K	S05	16	250	250	364 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	60,3	142,7	869	1132	-
250-400	K	S05	16	250	250	365 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	60,3	142,7	869	1132	-
250-400	K	S05	16	250	250	404 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	73	177,8	1003	1220	-
250-400	K	S05	16	250	250	405 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	73	177,8	1003	1220	-
250-400	K	S05	16	250	250	444 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	85,7	209,6	1158	1471	-
250-400	K	S05	16	250	250	445 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	85,7	209,6	1158	1471	-
250-400	D	S05	16	250	250	284 T	25	247	180	33	815	455	597	1462	340	550	143	652	200	60	595	105	400	47,6	117,6	731,3	1023	-
250-400	D	S05	16	250	250	286 T	25	247	180	33	815	455	597	1462	340	550	143	652	200	60	595	105	400	47,6	117,6	731,3	1054	-
250-400	D	S05	16	250	250	324 T	25	247	180	33	815	455	597	1462	340	550	143	652	200	60	595	105	400	54	133,4	812,5	1107	-
250-400	D	S05	16	250	250	326 T	25	247	180	33	815	455	597	1462	340	550	143	652	200	60	595	105	400	54	133,4	812,5	1123	-
250-400	D	S06	16	250	250	364 T	44	247	180	33	1045	455	597	1692	340	550	143	652	200	75	595	85	400	60,3	142,7	869	1382	-
250-400	D	S06	16	250	250	365 T	44	247	180	33	1045	455	597	1692	340	550	143	652	200	75	595	85	400	60,3	142,7	869	1382	-
250-401	K	S04	16	250	250	284 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	908	-
250-401	K	S04	16	250	250	286 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	939	-
250-401	K	S04	16	250	250	324 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	992	-
250-401	K	S04	16	250	250	326 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	1008	-
250-401	K	S05	16	250	250	284 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	908	-
250-401	K	S05	16	250	250	286 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	939	-
250-401	K	S05	16	250	250	324 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	992	-
250-401	K	S05	16	250	250	326 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	1008	-
250-401	K	S05	16	250	250	364 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	60,3	142,7	869	1132	-
250-401	K	S05	16	250	250	365 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	60,3	142,7	869	1147	-
250-401	K	S05	16	250	250	404 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	73	177,8	1003	1220	-
250-401	K	S05	16	250	250	405 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	73	177,8	1003	1220	-
250-401	K	S05	16	250	250	444 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	85,7	209,6	1158	1471	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
250-401	K	S06	16	250	250	444 T	44	177	180	33	960	425	597	1387	310	500	143	582	200	75	565	190	250	85,7	209,6	1158	1521	-
250-401	K	S06	16	250	250	445 T	44	177	180	33	960	425	597	1387	310	500	143	582	200	75	565	190	250	85,7	209,6	1158	1521	-
250-403	K	S04	16	250	250	284 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	908	-
250-403	K	S04	16	250	250	286 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	939	-
250-403	K	S04	16	250	250	324 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	992	-
250-403	K	S04	16	250	250	326 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	1008	-
250-403	K	S05	16	250	250	284 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	908	-
250-403	K	S05	16	250	250	286 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	939	-
250-403	K	S05	16	250	250	324 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	992	-
250-403	K	S05	16	250	250	326 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	54	133,4	812,5	1008	-
250-403	K	S05	16	250	250	364 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	60,3	142,7	869	1132	-
250-403	K	S05	16	250	250	365 T	25	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	60,3	142,7	869	1132	-
250-403	K	S05	16	250	250	404 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	73	177,8	1003	1220	-
250-403	K	S05	16	250	250	405 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	73	177,8	1003	1220	-
250-403	K	S05	16	250	250	444 T	26	177	180	33	730	425	597	1157	310	500	143	582	200	60	565	190	250	85,7	209,6	1158	1471	-
250-403	K	S06	16	250	250	405 T	43	177	180	33	960	425	597	1387	310	500	143	582	200	75	565	190	250	73	177,8	1003	1285	-
250-403	K	S06	16	250	250	444 T	43	177	180	33	960	425	597	1387	310	500	143	582	200	75	565	190	250	85,7	209,6	1158	1536	-
250-403	K	S06	16	250	250	445 T	43	177	180	33	960	425	597	1387	310	500	143	582	200	75	565	190	250	85,7	209,6	1158	1536	-
250-403	K	S06	16	250	250	447 T	43	177	180	33	960	425	597	1387	310	500	143	582	200	75	565	190	250	85,7	209,6	1247	1741	-
250-403	K	S06	16	250	250	449 T	43	177	180	33	960	425	597	1387	310	500	143	582	200	75	565	190	250	85,7	209,6	1396	1741	-
250-402	D	S04	16	250	250	284 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	908	-
250-402	D	S04	16	250	250	286 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	939	-
250-402	D	S04	16	250	250	324 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	54	133,4	812,5	992	-
250-402	D	S04	16	250	250	326 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	54	133,4	812,5	1008	-
250-402	D	S05	16	250	250	284 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	908	-
250-402	D	S05	16	250	250	286 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	47,6	117,6	731,3	939	-
250-402	D	S05	16	250	250	324 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	54	133,4	812,5	992	-
250-402	D	S05	16	250	250	326 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	54	133,4	812,5	1008	-
250-402	D	S05	16	250	250	364 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	60,3	142,7	869	1132	-
250-402	D	S05	16	250	250	365 T	25	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	60,3	142,7	869	1132	-
250-402	D	S05	16	250	250	404 T	26	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	73	177,8	1003	1205	-
250-402	D	S05	16	250	250	405 T	26	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	73	177,8	1003	1205	-
250-402	D	S05	16	250	250	444 T	26	177	180	33	737	425	597	914,0	310	500	143	582	200	60	565	190	250	85,7	209,6	1158	1456	-
250-402	D	S06	16	250	250	405 T	43	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	250	73	177,8	1003	1245	-
250-402	D	S06	16	250	250	444 T	43	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	250	85,7	209,6	1158	1496	-
250-402	D	S06	16	250	250	445 T	43	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	250	85,7	209,6	1158	1496	-
250-402	D	S06	16	250	250	447 T	43	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	250	85,7	209,6	1247	1701	-
250-402	D	S06	16	250	250	449 T	43	177	180	33	967	425	597	1144,0	310	500	143	582	200	75	565	190	250	85,7	209,6	1396	1701	-
250-630	K	S07	16	250	250	444 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	85,7	209,6	1158	2371	-
250-630	K	S07	16	250	250	445 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	85,7	209,6	1158	2371	-
250-630	K	S07	16	250	250	447 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	85,7	209,6	1247	2576	-
250-630	K	S07	16	250	250	449 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	85,7	209,6	1396	2576	-
250-630	K	S07	16	250	250	504 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	92,1	263,5	1256	2670	-
250-630	K	S07	16	250	250	505 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	92,1	263,5	1256	2670	-
250-630	K	S07	16	250	250	586 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	98,4	288,9	1551	3305	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
250-630	K	S07	16	250	250	587 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	98,4	288,9	1551	3305	-
250-632	K	S07	16	250	250	444 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	85,7	209,6	1158	2371	-
250-632	K	S07	16	250	250	445 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	85,7	209,6	1158	2371	-
250-632	K	S07	16	250	250	447 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	85,7	209,6	1247	2576	-
250-632	K	S07	16	250	250	449 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	85,7	209,6	1396	2576	-
250-632	K	S07	16	250	250	504 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	92,1	263,5	1256	2670	-
250-632	K	S07	16	250	250	505 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	92,1	263,5	1256	2670	-
250-632	K	S07	16	250	250	585 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	92,1	263,5	1256	1650	-
250-632	K	S07	16	250	250	586 T	30	197	150	33	1190	500	697	1737	425	590	143	600	200	95	725	200	350	98,4	288,9	1551	3305	-
300-400	K	S04	16	300	300	284 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1068	-
300-400	K	S04	16	300	300	286 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1099	-
300-400	K	S04	16	300	300	324 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1152	-
300-400	K	S04	16	300	300	326 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1168	-
300-400	K	S05	16	300	300	284 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1068	-
300-400	K	S05	16	300	300	286 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1099	-
300-400	K	S05	16	300	300	324 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1152	-
300-400	K	S05	16	300	300	326 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1168	-
300-400	K	S05	16	300	300	364 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	60,3	142,7	869	1292	-
300-400	K	S05	16	300	300	365 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	60,3	142,7	869	1307	-
300-400	K	S05	16	300	300	404 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	73	177,8	1003	1380	-
300-400	K	S05	16	300	300	405 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	73	177,8	1003	1380	-
300-400	K	S05	16	300	300	444 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	85,7	209,6	1158	1631	-
300-400	K	S05	16	300	300	445 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	85,7	209,6	1158	1631	-
300-400	D	S05	16	300	300	324 T	25	312	180	32	752	450	622	1464	360	610	143	722	200	60	590	168	400	54	133,4	812,5	1262	-
300-400	D	S05	16	300	300	326 T	26	312	180	32	752	450	622	1464	360	610	143	722	200	60	590	168	400	54	133,4	812,5	1293	-
300-400	D	S05	16	300	300	364 T	26	312	180	32	752	450	622	1464	360	610	143	722	200	60	590	168	400	60,3	142,7	869	1417	-
300-400	D	S05	16	300	300	365 T	26	312	180	32	752	450	622	1464	360	610	143	722	200	60	590	168	400	60,3	142,7	869	1417	-
300-400	D	S06	16	300	300	364 T	43	312	180	32	980	450	622	1692	360	610	143	722	200	75	590	150	400	60,3	142,7	869	1577	-
300-400	D	S06	16	300	300	365 T	43	312	180	32	980	450	622	1692	360	610	143	722	200	75	590	150	400	60,3	142,7	869	1577	-
300-400	D	S06	16	300	300	404 T	43	312	180	32	980	450	622	1692	360	610	143	722	200	75	590	150	400	73	177,8	1003	1650	-
300-400	D	S06	16	300	300	405 T	43	312	180	32	980	450	622	1692	360	610	143	722	200	75	590	150	400	73	177,8	1003	1650	-
300-400	D	S06	16	300	300	444 T	43	312	180	32	980	450	622	1692	360	610	143	722	200	75	590	150	400	85,7	209,6	1158	1901	-
300-401	K	S04	16	300	300	284 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1068	-
300-401	K	S04	16	300	300	286 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1099	-
300-401	K	S04	16	300	300	324 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1152	-
300-401	K	S04	16	300	300	326 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1168	-
300-401	K	S05	16	300	300	284 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1068	-
300-401	K	S05	16	300	300	286 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1099	-
300-401	K	S05	16	300	300	324 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1152	-
300-401	K	S05	16	300	300	326 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1168	-
300-401	K	S05	16	300	300	364 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	60,3	142,7	869	1292	-
300-401	K	S05	16	300	300	365 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	60,3	142,7	869	1307	-
300-401	K	S05	16	300	300	404 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	73	177,8	1003	1380	-
300-401	K	S05	16	300	300	405 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	73	177,8	1003	1380	-
300-401	K	S05	16	300	300	444 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	85,7	209,6	1158	1631	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
300-401	K	S05	16	300	300	445 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	85,7	209,6	1158	1631	-
300-402	D	S04	16	300	300	284 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1068	-
300-402	D	S04	16	300	300	286 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1099	-
300-402	D	S04	16	300	300	324 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1152	-
300-402	D	S04	16	300	300	326 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1168	-
300-402	D	S05	16	300	300	284 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1068	-
300-402	D	S05	16	300	300	286 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1099	-
300-402	D	S05	16	300	300	324 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1152	-
300-402	D	S05	16	300	300	326 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1168	-
300-402	D	S05	16	300	300	364 T	25	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	60,3	142,7	869	1292	-
300-402	D	S05	16	300	300	365 T	26	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	60,3	142,7	869	1292	-
300-402	D	S05	16	300	300	404 T	26	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	73	177,8	1003	1365	-
300-402	D	S05	16	300	300	405 T	26	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	73	177,8	1003	1365	-
300-402	D	S05	16	300	300	444 T	26	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	85,7	209,6	1158	1616	-
300-402	D	S05	16	300	300	445 T	26	212	180	28	750	450	622	962,0	355	590	143	617	200	60	590	170	300	85,7	209,6	1158	1616	-
300-403	K	S05	16	300	300	284 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1068	-
300-403	K	S05	16	300	300	286 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	47,6	117,6	731,3	1099	-
300-403	K	S05	16	300	300	324 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1152	-
300-403	K	S05	16	300	300	326 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	54	133,4	812,5	1168	-
300-403	K	S05	16	300	300	364 T	25	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	60,3	142,7	869	1292	-
300-403	K	S05	16	300	300	365 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	60,3	142,7	869	1307	-
300-403	K	S05	16	300	300	404 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	73	177,8	1003	1380	-
300-403	K	S05	16	300	300	405 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	73	177,8	1003	1380	-
300-403	K	S05	16	300	300	444 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	85,7	209,6	1158	1631	-
300-403	K	S05	16	300	300	445 T	26	212	180	28	750	450	622	1262	355	590	143	617	200	60	590	170	300	85,7	209,6	1158	1631	-
300-500	K	S06	16	300	300	324 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	54	133,4	812,5	1417	-
300-500	K	S06	16	300	300	326 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	54	133,4	812,5	1433	-
300-500	K	S06	16	300	300	364 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	60,3	142,7	869	1557	-
300-500	K	S06	16	300	300	365 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	60,3	142,7	869	1557	-
300-500	K	S06	16	300	300	404 T	38	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	73	177,8	1003	1740	-
300-500	K	S06	16	300	300	405 T	38	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	73	177,8	1003	1740	-
300-500	K	S07	16	300	300	365 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	60,3	142,7	869	1747	-
300-500	K	S07	16	300	300	404 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	73	177,8	1003	1820	-
300-500	K	S07	16	300	300	405 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	73	177,8	1003	1820	-
300-500	K	S07	16	300	300	444 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1158	2071	-
300-500	K	S07	16	300	300	445 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1158	2071	-
300-500	K	S07	16	300	300	447 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1247	2276	-
300-502	D	S06	16	300	300	324 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	54	133,4	812,5	1417	-
300-502	D	S06	16	300	300	326 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	54	133,4	812,5	1433	-
300-502	D	S06	16	300	300	364 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	60,3	142,7	869	1557	-
300-502	D	S06	16	300	300	365 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	60,3	142,7	869	1557	-
300-502	D	S06	16	300	300	404 T	38	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	73	177,8	1003	1740	-
300-502	D	S06	16	300	300	405 T	38	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	73	177,8	1003	1740	-
300-502	D	S07	16	300	300	365 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	60,3	142,7	869	1747	-
300-502	D	S07	16	300	300	404 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	73	177,8	1003	1820	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓔ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
300-502	D	S07	16	300	300	405 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	73	177,8	1003	1820	-
300-502	D	S07	16	300	300	444 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1158	2071	-
300-502	D	S07	16	300	300	445 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1158	2071	-
300-502	D	S07	16	300	300	447 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1247	2276	-
300-505	K	S06	16	300	300	324 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	54	133,4	812,5	1417	-
300-505	K	S06	16	300	300	326 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	54	133,4	812,5	1433	-
300-505	K	S06	16	300	300	364 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	60,3	142,7	869	1557	-
300-505	K	S06	16	300	300	365 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	60,3	142,7	869	1557	-
300-505	K	S06	16	300	300	404 T	38	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	73	177,8	1003	1740	-
300-505	K	S06	16	300	300	405 T	38	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	73	177,8	1003	1740	-
300-505	K	S07	16	300	300	365 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	60,3	142,7	869	1747	-
300-505	K	S07	16	300	300	404 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	73	177,8	1003	1820	-
300-505	K	S07	16	300	300	405 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	73	177,8	1003	1820	-
300-505	K	S07	16	300	300	444 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1158	2071	-
300-505	K	S07	16	300	300	445 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1158	2071	-
300-505	K	S07	16	300	300	447 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1247	2276	-
300-505	K	S07	16	300	300	449 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1396	2276	-
300-505	K	S07	16	300	300	504 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	92,1	263,5	1256	2370	-
300-505	K	S07	16	300	300	505 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	92,1	263,5	1256	2370	-
300-505	K	S07	16	300	300	586 T	64	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	98,4	288,9	1551	3045	-
300-505	D	S06	16	300	300	324 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	54	133,4	812,5	1417	-
300-505	D	S06	16	300	300	326 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	54	133,4	812,5	1433	-
300-505	D	S06	16	300	300	364 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	60,3	142,7	869	1557	-
300-505	D	S06	16	300	300	365 T	37	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	60,3	142,7	869	1557	-
300-505	D	S06	16	300	300	404 T	38	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	73	177,8	1003	1740	-
300-505	D	S06	16	300	300	405 T	38	207	130	32	1045	450	597	1602	345	530	143	610	200	75	675	340	350	73	177,8	1003	1740	-
300-505	D	S07	16	300	300	365 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	60,3	142,7	869	1747	-
300-505	D	S07	16	300	300	404 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	73	177,8	1003	1820	-
300-505	D	S07	16	300	300	405 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	73	177,8	1003	1820	-
300-505	D	S07	16	300	300	444 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1158	2071	-
300-505	D	S07	16	300	300	445 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1158	2071	-
300-505	D	S07	16	300	300	447 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1247	2276	-
300-505	D	S07	16	300	300	449 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	85,7	209,6	1396	2276	-
300-505	D	S07	16	300	300	504 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	92,1	263,5	1256	2370	-
300-505	D	S07	16	300	300	505 T	38	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	92,1	263,5	1256	2370	-
300-505	D	S07	16	300	300	586 T	64	207	130	32	1190	450	597	1747	345	530	143	610	200	95	675	340	350	98,4	288,9	1551	3045	-
350-500	K	S06	16	350	350	364 T	38	287	225	35	1045	560	682	1682	400	590	143	690	200	75	785	340	350	60,3	142,7	869	1867	-
350-500	K	S06	16	350	350	365 T	38	287	225	35	1045	560	682	1682	400	590	143	690	200	75	785	340	350	60,3	142,7	869	1867	-
350-500	K	S07	16	350	350	404 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	73	177,8	1003	2020	-
350-500	K	S07	16	350	350	405 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	73	177,8	1003	2020	-
350-500	K	S07	16	350	350	444 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1158	2271	-
350-500	K	S07	16	350	350	445 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1158	2271	-
350-500	K	S07	16	350	350	447 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1247	2476	-
350-500	K	S07	16	350	350	449 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1396	2476	-
350-501	K	S06	16	350	350	324 T	38	287	225	35	1045	560	682	1732	400	590	143	690	200	75	785	340	400	54	133,4	812,5	1727	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
350-501	K	S06	16	350	350	326 T	38	287	225	35	1045	560	682	1732	400	590	143	690	200	75	785	340	400	54	133,4	812,5	1743	-
350-501	K	S06	16	350	350	364 T	38	287	225	35	1045	560	682	1732	400	590	143	690	200	75	785	340	400	60,3	142,7	869	1867	-
350-501	K	S06	16	350	350	365 T	38	287	225	35	1045	560	682	1732	400	590	143	690	200	75	785	340	400	60,3	142,7	869	1867	-
350-501	K	S06	16	350	350	404 T	38	287	225	35	1045	560	682	1732	400	590	143	690	200	75	785	340	400	73	177,8	1003	1940	-
350-501	K	S06	16	350	350	405 T	38	287	225	35	1045	560	682	1732	400	590	143	690	200	75	785	340	400	73	177,8	1003	1940	-
350-501	K	S06	16	350	350	444 T	38	287	225	35	1045	560	682	1732	400	590	143	690	200	75	785	340	400	85,7	209,6	1158	2191	-
350-501	K	S06	16	350	350	445 T	38	287	225	35	1045	560	682	1732	400	590	143	690	200	75	785	340	400	85,7	209,6	1158	2191	-
350-501	K	S07	16	350	350	447 T	38	287	225	35	1190	560	682	1877	400	590	143	690	200	95	785	340	400	85,7	209,6	1247	2476	-
350-502	D	S06	16	350	350	364 T	38	287	225	35	1045	560	682	1682	400	590	143	690	200	75	785	340	350	60,3	142,7	869	1867	-
350-502	D	S06	16	350	350	365 T	38	287	225	35	1045	560	682	1682	400	590	143	690	200	75	785	340	350	60,3	142,7	869	1867	-
350-502	D	S07	16	350	350	404 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	73	177,8	1003	2020	-
350-502	D	S07	16	350	350	405 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	73	177,8	1003	2020	-
350-502	D	S07	16	350	350	444 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1158	2271	-
350-502	D	S07	16	350	350	445 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1158	2271	-
350-502	D	S07	16	350	350	447 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1247	2476	-
350-502	D	S07	16	350	350	449 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1396	2476	-
350-503	K	S06	16	350	350	404 T	38	287	225	35	1045	560	682	1682	400	590	143	690	200	75	785	340	350	73	177,8	1003	1940	-
350-503	K	S06	16	350	350	405 T	38	287	225	35	1045	560	682	1682	400	590	143	690	200	75	785	340	350	73	177,8	1003	1940	-
350-503	K	S07	16	350	350	444 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1158	2271	-
350-503	K	S07	16	350	350	445 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1158	2271	-
350-503	K	S07	16	350	350	447 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1247	2476	-
350-503	K	S07	16	350	350	449 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1396	2476	-
350-503	D	S06	16	350	350	404 T	38	287	225	35	1045	560	682	1682	400	590	143	690	200	75	785	340	350	73	177,8	1003	1940	-
350-503	D	S06	16	350	350	405 T	38	287	225	35	1045	560	682	1682	400	590	143	690	200	75	785	340	350	73	177,8	1003	1940	-
350-503	D	S07	16	350	350	444 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1158	2271	-
350-503	D	S07	16	350	350	445 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1158	2271	-
350-503	D	S07	16	350	350	447 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1247	2476	-
350-503	D	S07	16	350	350	449 T	38	287	225	35	1190	560	682	1827	400	590	143	690	200	95	785	340	350	85,7	209,6	1396	2476	-
350-632	K	S07	16	350	350	444 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	85,7	209,6	1158	2711	◎
350-632	K	S07	16	350	350	445 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	85,7	209,6	1158	2711	-
350-632	K	S07	16	350	350	447 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	85,7	209,6	1247	2916	-
350-632	K	S07	16	350	350	449 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	85,7	209,6	1396	2916	-
350-632	K	S07	16	350	350	504 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	92,1	263,5	1256	3010	-
350-632	K	S07	16	350	350	505 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	92,1	263,5	1256	3010	-
350-632	K	S07	16	350	350	586 T	36	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	98,4	288,9	1551	3545	-
350-632	K	S08	16	350	350	587 T	36	247	150	30	1190	560	817	1787	470	655	143	650	200	110	850	207	350	98,4	288,9	1551	3585	-
350-633	K	S07	16	350	350	444 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	85,7	209,6	1158	2711	◎
350-633	K	S07	16	350	350	445 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	85,7	209,6	1158	2711	-
350-633	K	S07	16	350	350	447 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	85,7	209,6	1247	2916	-
350-633	K	S07	16	350	350	449 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	85,7	209,6	1396	2916	-
350-633	K	S07	16	350	350	504 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	92,1	263,5	1256	3010	-
350-633	K	S07	16	350	350	505 T	35	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	92,1	263,5	1256	3010	-
350-633	K	S07	16	350	350	586 T	36	247	150	30	1190	560	817	1787	470	655	143	650	200	95	850	207	350	98,4	288,9	1551	3545	-
350-633	K	S08	16	350	350	587 T	36	247	150	30	1190	560	817	1787	470	655	143	650	200	110	850	207	350	98,4	288,9	1551	3585	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Baseplate	Pump										Flanged spacer		Shaft	Pump position		Spacer	Motor			[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	a_1	$øp_1$	$ød_2$	h_3	K	y	$ød_1$ (max.)	i_2 (max.)	k Ⓐ		
350-710	K	S08	16	350	350	444 T	35	272	300	36	1175	560	817	1797	570	550	143	675	200	110	850	207	350	85,7	209,6	1158	3221	-
350-710	K	S08	16	350	350	445 T	35	272	300	36	1175	560	817	1797	570	550	143	675	200	110	850	207	350	85,7	209,6	1158	3221	-
350-710	K	S08	16	350	350	447 T	35	272	300	36	1175	560	817	1797	570	550	143	675	200	110	850	207	350	85,7	209,6	1247	3426	-
350-710	K	S08	16	350	350	449 T	35	272	300	36	1175	560	817	1797	570	550	143	675	200	110	850	207	350	85,7	209,6	1396	3426	-
350-710	K	S08	16	350	350	504 T	35	272	300	36	1175	560	817	1797	570	550	143	675	200	110	850	207	350	92,1	263,5	1256	3520	-
350-710	K	S08	16	350	350	505 T	35	272	300	36	1175	560	817	1797	570	550	143	675	200	110	850	207	350	92,1	263,5	1256	3520	-
350-710	K	S08	16	350	350	586 T	35	272	300	36	1175	560	817	1797	570	550	143	675	200	110	850	207	350	98,4	288,9	1551	4155	-
350-710	K	S08	16	350	350	587 T	35	272	300	36	1175	560	817	1797	570	550	143	675	200	110	850	207	350	98,4	288,9	1551	4155	-
350-713	K	S08	16	350	350	504 T	35	287	300	36	1183	600	817	1820	570	550	143	675	200	110	890	207	350	92,1	263,5	1256	3520	-
350-713	K	S08	16	350	350	505 T	35	287	300	36	1183	600	817	1820	570	550	143	675	200	110	890	207	350	92,1	263,5	1256	3520	-
350-713	K	S08	16	350	350	586 T	35	287	300	36	1183	600	817	1820	570	550	143	675	200	110	890	207	350	98,4	288,9	1551	4155	-
350-713	K	S08	16	350	350	587 T	35	287	300	36	1183	600	817	1820	570	550	143	675	200	110	890	207	350	98,4	288,9	1551	4155	-
350-713	K	S08	16	350	350	588 T	35	287	300	36	1183	600	817	1820	570	550	143	675	200	110	890	207	350	98,4	288,9	1551	2500	-
350-713	K	S08	16	350	350	589 T	35	287	300	36	1183	600	817	1820	570	550	143	675	200	110	890	207	350	98,4	288,9	1551	2500	-
400-632	K	S08	16	500	400	444 T	34	342	250	38	1211	670	997	1953	510	790	200	945	200	110	960	207	400	85,7	209,6	1158	3296	-
400-632	K	S08	16	500	400	445 T	34	342	250	38	1211	670	997	1953	510	790	200	945	200	110	960	207	400	85,7	209,6	1158	3296	-
400-632	K	S08	16	500	400	447 T	34	342	250	38	1211	670	997	1953	510	790	200	945	200	110	960	207	400	85,7	209,6	1247	3501	-
400-632	K	S08	16	500	400	449 T	34	342	250	38	1211	670	997	1953	510	790	200	945	200	110	960	207	400	85,7	209,6	1396	3501	-
400-632	K	S08	16	500	400	504 T	34	342	250	38	1211	670	997	1953	510	790	200	945	200	110	960	207	400	92,1	263,5	1256	3595	-
400-632	K	S08	16	500	400	505 T	34	342	250	38	1211	670	997	1953	510	790	200	945	200	110	960	207	400	92,1	263,5	1256	3595	-
400-632	K	S08	16	500	400	586 T	34	342	250	38	1211	670	997	1953	510	790	200	945	200	110	960	207	400	98,4	288,9	1551	4230	-
400-632	K	S08	16	500	400	587 T	34	342	250	38	1211	670	997	1953	510	790	200	945	200	110	960	207	400	98,4	288,9	1551	4230	-
500-632	K	S08	16	500	500	444 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	85,7	209,6	1158	4106	◎Ⓡ
500-632	K	S08	16	500	500	445 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	85,7	209,6	1158	4106	-
500-632	K	S08	16	500	500	447 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	85,7	209,6	1247	4311	-
500-632	K	S08	16	500	500	449 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	85,7	209,6	1396	4311	-
500-632	K	S08	16	500	500	504 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	92,1	263,5	1256	4405	-
500-632	K	S08	16	500	500	505 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	92,1	263,5	1256	4405	-
500-632	K	S08	16	500	500	586 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	98,4	288,9	1551	5040	-
500-632	K	S08	16	500	500	587 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	98,4	288,9	1551	5040	-
500-634	K	S08	16	500	500	444 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	85,7	209,6	1158	4106	-
500-634	K	S08	16	500	500	445 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	85,7	209,6	1158	4106	-
500-634	K	S08	16	500	500	447 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	85,7	209,6	1247	4311	-
500-634	K	S08	16	500	500	449 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	85,7	209,6	1396	4311	-
500-634	K	S08	16	500	500	504 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	92,1	263,5	1256	4405	-
500-634	K	S08	16	500	500	505 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	92,1	263,5	1256	4405	-
500-634	K	S08	16	500	500	586 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	98,4	288,9	1551	5040	-
500-634	K	S08	16	500	500	587 T	34	352	250	43	1221	750	997	1923	640	815	200	955	200	110	1040	207	350	98,4	288,9	1551	5040	-

Installation type V

Table 7: Installation type V [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Soleplate	Pump									Shaft stub				Pump set / elbow				[kg] ⓘ	Comment
				DN_1	DN_2	DN_0			a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	l_w	t	u	c	e	e_1	$øp_1$		
50-215	F	S01	17	65	50	65	-	150	97	20	495	170	222	592	135	150	-	32	110	34,2	10	165	134	272	80	87	Ⓝ
50-216	F	S01	17	65	50	65	-	150	97	20	495	170	222	592	135	150	-	32	110	34,2	10	165	134	272	80	87	Ⓝ
50-250	K	S01	17	65	50	65	-	150	97	20	493	170	222	590	155	155	-	32	110	34,2	10	165	134	272	80	89	Ⓝ
50-251	K	S02	17	65	50	65	-	150	97	20	493	170	222	590	155	155	-	48	110	51,2	14	165	134	272	80	91	Ⓝ
65-215	F	S01	17	80	65	80	-	151	97	20	514	225	237	611	130	155	-	32	110	34,2	10	165	134	272	80	97	Ⓝ
65-216	E	S02	17	80	65	80	-	170	97	22	511	225	237	608	155	190	-	48	110	51,2	14	165	134	272	80	109	Ⓝ
65-217	F	S01	17	80	65	80	-	151	97	20	493	225	237	590	130	155	-	32	110	34,2	10	165	134	272	80	97	Ⓝ
65-250	K	S01	17	80	65	80	-	151	97	20	515	225	240	615	160	200	-	32	110	34,2	10	165	137	275	80	105	Ⓝ
80-216	F	S01	17	100	80	100	-	166	122	22	527	225	247	650	130	165	-	32	110	34,2	10	180	160	313	120	97	Ⓝ
80-216	E	S02	17	100	80	100	-	166	122	22	519	225	247	642	165	200	-	48	110	51,2	14	180	160	313	120	122	Ⓝ
80-217	F	S01	17	100	80	100	-	166	122	22	499	225	247	622	130	165	-	32	110	34,2	10	180	160	313	120	97	Ⓝ
80-250	K	S01	17	100	80	100	-	157	107	20	517	225	248	624	160	175	-	32	110	34,2	10	180	144	297	120	113	Ⓝ
80-252	F	S01	17	100	80	100	-	157	107	20	517	225	248	624	160	175	-	32	110	34,2	10	180	144	297	120	113	Ⓝ
80-253	F	S02	17	100	80	100	-	166	121	20	531	225	248	651	160	175	-	48	110	51,2	14	180	157	310	120	120	Ⓝ
80-253	E	S02	17	100	80	100	-	166	121	20	531	225	248	651	160	175	-	48	110	51,2	14	180	157	310	120	130	Ⓝ
80-315	F	S03	17	100	80	100	-	152	107	20	595	225	250	705	180	180	-	60	110	63,2	18	180	147	300	120	155	Ⓝ
80-315	K	S03	17	100	80	100	-	152	107	20	595	225	250	705	180	180	-	60	110	63,2	18	180	147	300	120	155	Ⓝ
80-315	D	S03	17	100	80	100	-	162	187	22	593	280	260	783	180	205	-	60	110	63,2	18	180	227	380	120	288	Ⓝ
80-316	D	S03	17	125	80	125	-	163	207	22	593	280	300	803	195	225	-	60	110	63,2	18	200	247	420	120	248	Ⓝ
80-317	D	S03	17	100	80	100	-	171	172	22	599	280	260	774	181	201	-	60	110	63,2	18	180	161	314	120	248	Ⓝ
80-317	F	S03	17	100	80	100	-	152	107	20	595	225	250	705	180	180	-	60	110	63,2	18	180	147	300	120	155	Ⓝ
100-215	F	S01	17	100	100	100	-	153	137	27	536	225	277	673	205	240	100	32	110	34,2	10	180	174	327	120	111	-
100-251	F	S02	17	100	100	100	-	153	137	27	530	225	277	667	180	280	118	48	110	51,2	14	180	174	327	120	126	-
100-252	F	S01	17	100	100	100	-	153	137	27	530	225	280	670	180	280	118	32	110	34,2	10	180	177	330	120	119	-
100-253	F	S02	17	100	100	100	-	153	137	27	530	225	280	670	180	280	118	48	110	51,2	14	180	177	330	120	126	-
100-253	E	S02	17	100	100	100	-	153	137	27	533	225	277	670	205	285	90	48	110	51,2	14	180	174	327	120	141	-
100-253	K	S02	17	100	100	100	-	153	137	27	533	225	277	670	205	282	90	48	110	51,2	14	180	174	327	120	142	-
100-253	D	S02	17	150	100	150	-	161	202	27	531	280	380	736	205	330	100	48	110	51,2	14	220	242	435	150	214	-
100-254	F	S01	17	100	100	100	-	153	137	27	530	225	277	667	180	280	118	32	110	34,2	10	180	174	327	120	119	-
100-254	K	S01	17	100	100	100	-	153	137	27	530	225	277	667	180	280	118	32	110	34,2	10	180	174	327	120	119	-
100-316	F	S03	17	150	100	150	-	172	137	25	604	280	312	741,0	200	290	90	60	110	63,2	18	220	277	470	150	198	-
100-316	K	S03	17	150	100	150	-	172	137	25	604	280	312	741,0	200	290	90	60	110	63,2	18	220	277	470	150	198	-
100-316	D	S03	17	150	100	150	-	165	237	27	605	280	340	845	210	305	100	60	110	63,2	18	220	277	470	150	246	-
100-400	K	S05	18	150	100	250	-	-	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-401	F	S05	18	125	100	125	-	-	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	K	S05	18	125	100	125	-	-	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-403	D	S05	18	200	100	300	-	-	-	-	726	-	400	-	-	370	100	60	140	63,2	18	483	160	645	150	465	◎
125-315	K	S03	17	125	125	125	-	154	170	28	631	280	325	801	230	320	118	60	110	63,2	18	200	207	380	120	192	-
150-253	D	S02	17	150	150	150	-	158	166	29	573,5	280	370	740	219	340	120	48	110	51,2	14	220	203	396	150	196	-

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Soleplate	Pump									Shaft stub				Pump set / elbow				[kg] ⓘ	Comment
				DN_1	DN_2	DN_0			a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	l_w	t	u	c	e	e_1	$øp_1$		
150-315	F	S03	17	150	150	150	-	155	166	29	641	280	370	807	250	345	118	60	110	63,2	18	220	35	220	150	213	-
150-315	K	S03	17	150	150	150	-	155	166	29	641	280	370	807	250	345	118	60	110	63,2	18	220	35	220	150	213	-
150-315	D	S03	17	150	150	150	-	159	220	29	617	315	400	837	250	385	120	60	110	63,2	18	220	257	450	150	282	-
150-317	K	S03	17	150	150	150	-	168	97	29	618	280	367	715	250	350	100	60	110	63,2	18	220	134	327	150	230	-
150-317	D	S03	17	200	150	200	-	168	97	29	618	280	367	715	250	350	100	60	110	63,2	18	260	134	357	200	239	-
150-400	D	S05	18	200	150	250	-	-	-	-	725	-	400	-	-	365	100	60	140	63,2	18	420	300	692	150	590	◎
150-400	K	S05	18	200	150	250	-	-	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-401	F	S05	18	150	150	250	-	-	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05	18	150	150	250	-	-	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	D	S05	18	250	150	300	-	-	-	-	738	-	475	-	-	420	120	60	140	63,2	18	483	400	810	150	760	◎
150-401	D	S06	18	250	150	300	-	-	-	-	968	-	475	-	-	420	120	75	140	79,7	20	483	400	810	150	815	◎
150-403	K	S05	18	200	150	250	-	-	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05	18	200	150	250	-	-	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
151-401	K	S05	18	150	150	250	-	-	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	535	-
151-403	K	S05	18	200	150	250	-	-	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-503	K	S06	18	150	150	250	-	-	-	-	941	-	500	-	-	380	118	75	195	79,7	20	420	180	580	100	775	◎
150-503	K	S07	18	150	150	250	-	-	-	-	1086	-	500	-	-	380	118	95	220	100,2	25	420	180	580	100	840	◎
150-503	D	S06	18	200	150	300	-	-	-	-	941	-	500	-	-	380	118	75	195	79,7	20	483	180	645	150	795	◎
150-503	D	S07	18	200	150	300	-	-	-	-	1086	-	500	-	-	380	118	95	220	100,2	25	483	180	645	150	860	◎
200-315	K	S03	17	200	200	200	-	156	180	30	620	315	450	800	240	435	118	60	110	63,2	18	260	217	181	200	269	-
200-315	D	S03	17	200	200	200	-	160	220	30	666	375	500	886	290	450	143	60	110	63,2	18	260	257	221	200	337	-
200-316	K	S03	17	200	200	200	-	156	180	30	620	315	450	800	240	435	118	60	110	63,2	18	260	217	181	200	269	-
200-317	K	S03	17	200	200	200	-	169	147	29	616	315	447	763	260	410	118	60	110	63,2	18	260	217	181	200	230	-
200-318	K	S03	17	200	200	200	-	169	147	29	616	315	447	763	260	407	118	60	110	63,2	18	260	217	181	200	230	-
200-330	K	S05	18	250	200	300	-	-	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-400	D	S05	18	250	200	300	-	-	-	-	755	-	520	-	-	550	125	60	140	63,2	18	483	362	790	150	775	◎
200-400	D	S06	18	250	200	300	-	-	-	-	985	-	520	-	-	550	125	75	195	79,7	20	483	362	790	150	820	◎
200-401	K	S05	18	200	200	300	-	-	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	◎
200-402	K	S05	18	200	200	300	-	-	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S06	18	200	200	300	-	-	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	215	645	150	525	◎
200-402	D	S05	18	250	200	300	-	-	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S06	18	250	200	300	-	-	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-403	K	S05	18	200	200	300	-	-	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	470	◎
200-403	K	S06	18	200	200	300	-	-	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	215	645	150	525	◎
200-405	D	S05	18	250	200	300	-	-	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S06	18	250	200	300	-	-	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-501	K	S06	18	250	200	300	-	-	-	-	1020	-	560	-	-	470	118	75	195	79,7	20	483	275	685	150	950	◎
200-502	K	S06	18	200	200	300	-	-	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	960	◎
200-502	K	S07	18	200	200	300	-	-	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	1025	◎
200-503	K	S06	18	200	200	300	-	-	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	960	◎
200-503	K	S07	18	200	200	300	-	-	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	1025	◎
200-503	D	S06	18	250	200	350	-	-	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	955	◎
200-503	D	S07	18	250	200	350	-	-	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	1020	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Soleplate	Pump									Shaft stub				Pump set / elbow				[kg] ⓘ	Comment
				DN_1	DN_2	DN_0			a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	l_w	t	u	c	e	e_1	$øp_1$		
200-504	K	S06	18	250	200	350	-	-	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	960	◎
200-504	K	S07	18	250	200	350	-	-	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	1025	◎
200-505	K	S06	18	250	200	350	-	-	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	960	◎
200-505	K	S07	18	250	200	350	-	-	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	1025	◎
200-631	K	S07	18	250	200	350	-	-	-	-	1171	-	650	-	-	550	140	95	220	100,2	25	547	300	779	150	1325	◎
200-631	K	S08	18	250	200	350	-	-	-	-	1171	-	650	-	-	550	140	110	220	116,2	28	547	300	779	150	1335	◎
250-400	K	S05	18	250	250	350	-	-	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	D	S05	18	250	250	350	-	-	-	-	815	-	600	-	-	550	143	60	140	63,2	18	547	315	799	150	690	◎
250-400	D	S06	18	250	250	350	-	-	-	-	1045	-	600	-	-	550	143	75	195	79,7	20	547	315	799	150	850	◎
250-401	K	S05	18	250	250	350	-	-	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S06	18	250	250	350	-	-	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-402	D	S05	18	250	250	350	-	-	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S06	18	250	250	350	-	-	-	-	967	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-403	K	S05	18	250	250	350	-	-	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S06	18	250	250	350	-	-	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-630	K	S07	18	250	250	350	-	-	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1185	◎
250-630	K	S08	18	250	250	350	-	-	-	-	1190	-	700	-	-	590	143	110	220	116,2	28	547	225.5	747	150	1215	◎
250-632	K	S07	18	250	250	350	-	-	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1185	◎
250-632	K	S08	18	250	250	350	-	-	-	-	1190	-	700	-	-	590	143	110	220	116,2	28	547	225.5	747	150	1215	◎
250-900	K	S09	18	350	250	500	-	-	-	-	1237	-	900	-	-	700	100	120	210	127,2	32	737	400	1037	200	2500	-
300-400	K	S05	18	300	300	400	-	-	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	D	S05	18	300	300	400	-	-	-	-	752	-	625	-	-	610	143	60	140	63,2	18	610	315	931,5	150	845	◎
300-400	D	S06	18	300	300	400	-	-	-	-	980	-	625	-	-	610	143	75	195	79,7	20	610	315	931,5	150	985	◎
300-401	K	S05	18	300	300	400	-	-	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	18	300	300	400	-	-	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-402	D	S06	18	300	300	400	-	-	-	-	980	-	625	-	-	590	143	75	195	79,7	20	610	315	826,5	150	755	◎
300-403	K	S05	18	300	300	400	-	-	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-500	K	S06	18	300	300	400	-	-	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	805	◎
300-500	K	S07	18	300	300	400	-	-	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	885	◎
300-502	D	S06	18	300	300	400	-	-	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	840	◎
300-502	D	S07	18	300	300	400	-	-	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	920	◎
300-505	K	S06	18	300	300	400	-	-	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	806	◎
300-505	K	S07	18	300	300	400	-	-	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	886	◎
300-505	D	S06	18	300	300	400	-	-	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	848	◎
300-505	D	S07	18	300	300	400	-	-	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	928	◎
350-500	K	S06	18	350	350	500	-	-	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	990	◎
350-500	K	S07	18	350	350	500	-	-	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-501	K	S06	18	350	350	500	-	-	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	990	◎
350-501	K	S07	18	350	350	500	-	-	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-502	D	S06	18	350	350	500	-	-	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	1040	◎
350-502	D	S07	18	350	350	500	-	-	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1120	◎
350-503	K	S06	18	350	350	500	-	-	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	990	◎
350-503	K	S07	18	350	350	500	-	-	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Soleplate	Pump										Shaft stub				Pump set / elbow				[kg] ①	Comment
				DN_1	DN_2	DN_0			a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	l_w	t	u	c	e	e_1	$øp_1$		
350-503	D	S06	18	350	350	500	-	-	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	1040	◎
350-503	D	S07	18	350	350	500	-	-	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1120	◎
350-632	K	S07	18	350	350	500	-	-	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-632	K	S08	18	350	350	500	-	-	-	-	1190	-	820	-	-	655	143	110	220	116,2	28	737	310	987	200	1450	◎
350-633	K	S07	18	350	350	500	-	-	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-633	K	S08	18	350	350	500	-	-	-	-	1190	-	820	-	-	655	143	110	220	116,2	28	737	310	987	200	1450	◎
350-710	K	S08	18	350	350	500	-	-	-	-	1175	-	820	-	-	500	143	110	220	116,2	28	737	370	1012	200	1770	-
350-713	K	S08	18	350	350	500	-	-	-	-	1183	-	820	-	-	590	143	110	220	116,2	28	737	370	1029	200	1770	-
350-713	K	S09	18	350	350	500	-	-	-	-	1280	-	820	-	-	590	143	120	210	127,2	32	737	370	1029	200	2457	◎
400-500	K	S06	18	400	400	600	-	-	-	-	1056	-	835	-	-	725	200	75	195	79,7	20	864	355	1164	200	1590	◎
400-500	K	S07	18	400	400	600	-	-	-	-	1202	-	835	-	-	725	200	95	220	100,2	25	864	355	1164	200	1650	◎
400-632	K	S08	18	500	400	600	-	-	-	-	1211	-	1000	-	-	850	200	110	220	116,2	28	864	355	1209	200	1900	◎
400-710	K	S09	18	500	400	700	-	-	-	-	1309	-	1000	-	-	900	150	120	210	127,2	32	900	410	1250	200	3250	◎
400-713	K	S09	18	500	400	700	-	-	-	-	1309	-	1000	-	-	900	150	120	210	127,2	32	900	410	1250	200	3250	◎
400-900	K	S09	18	500	400	600	-	-	-	-	1242	-	1000	-	-	780	150	120	210	127,2	32	864	400	1216	200	2800	-
500-632	K	S08	18	500	500	700	-	-	-	-	1221	-	1000	-	-	815	200	110	220	116,2	28	900	355	1255	200	2695	-
500-634	K	S07	18	500	500	700	-	-	-	-	1221	-	1000	-	-	815	200	95	220	100,2	25	900	355	1255	200	2225	-
500-634	K	S08	18	500	500	700	-	-	-	-	1221	-	1000	-	-	815	200	110	220	116,2	28	900	355	1255	200	2695	-
500-710	K	S09	18	500	500	700	-	-	-	-	1314	-	1000	-	-	900	200	120	210	127,2	32	900	390	1236	200	3620	-
500-900	K	S09	18	600	500	800	-	-	-	-	1292	-	1200	-	-	900	200	120	210	127,2	32	1000	420	1402	200	4000	-
500-900	K	S10	18	600	500	800	-	-	-	-	1682	-	1200	-	-	900	200	145	280	153,3	36	1000	420	1402	200	4500	-
600-520	K	S07	18	600	600	800	-	-	-	-	1382	-	1060	-	-	910	200	95	220	100,2	25	1000	460	1450	200	2650	-
600-710	K	S08	18	600	600	800	-	-	-	-	1247	-	1185	-	-	750	200	110	220	116,2	28	1000	500	1490	200	3270	-
600-900	K	S10	18	700	600	800	-	-	-	-	1371	-	1200	-	-	900	200	145	280	153,3	36	1000	420	1670	200	5000	-
700-902	K	S08	18	750	750	900	-	-	-	-	1287	-	1720	-	-	995	200	110	220	116,2	28	1000	520	1539	200	3880	-
700-902	K	S09	18	750	750	900	-	-	-	-	1362	-	1720	-	-	995	200	120	210	127,2	32	1000	520	1539	200	5500	-

Installation type V: Soleplate and foundation / foundation rails

Table 8: Installation type V: Soleplate and foundation / foundation rails [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Flange			Soleplate							Foundation / foundation rails											Chemical anchors		
			DN_1	DN_2	DN_0	f_3	f_4	m_1	m_2	g_2	$ø s_2$	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L
50-215	F	S01	65	50	65	400	500	420	320	6	20	15	-	420	-	-	-	300	-	550	650	-	-	M16×190	18	125
50-216	F	S01	65	50	65	400	500	420	320	6	20	15	-	420	-	-	-	300	-	550	650	-	-	M16×190	18	125
50-250	K	S01	65	50	65	400	500	420	320	6	20	15	-	420	-	-	-	300	-	550	650	-	-	M16×190	18	125
50-251	K	S02	65	50	65	400	500	420	320	6	20	15	-	420	-	-	-	300	-	550	650	-	-	M16×190	18	125
65-215	F	S01	80	65	80	500	500	420	380	6	20	18,5	-	420	-	-	-	300	-	700	650	-	-	M16×190	18	125
65-216	E	S02	80	65	80	500	500	420	380	6	20	18,5	-	420	-	-	-	300	-	700	650	-	-	M16×190	18	125
65-217	F	S01	80	65	80	500	500	420	380	6	20	18,5	-	420	-	-	-	300	-	700	650	-	-	M16×190	18	125
65-250	K	S01	80	65	80	500	500	420	380	6	20	18,5	-	420	-	-	-	300	-	700	650	-	-	M16×190	18	125
80-216	F	S01	100	80	100	500	600	520	380	6	20	21	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125

Size	Impeller type	Bearing bracket	Flange			Soleplate							Foundation / foundation rails											Chemical anchors		
			DN_1	DN_2	DN_0	f_3	f_4	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L
80-216	E	S02	100	80	100	500	600	520	380	6	20	21	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-217	F	S01	100	80	100	500	600	520	380	6	20	21	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-250	K	S01	100	80	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-252	F	S01	100	80	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-253	F	S02	100	80	100	500	600	520	380	6	20	21	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-253	E	S02	100	80	100	500	600	520	380	6	20	21	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-315	F	S03	100	80	100	500	600	520	380	6	20	22,5	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-315	K	S03	100	80	100	500	600	520	380	6	20	22,5	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-315	D	S03	100	80	100	600	710	630	450	6	20	27,5	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
80-316	D	S03	125	80	125	600	710	630	450	6	20	27,5	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
80-317	F	S03	100	80	100	500	600	520	380	6	20	22,5	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
80-317	D	S03	100	80	100	600	710	630	450	6	20	27,5	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
100-215	F	S01	100	100	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
100-251	F	S02	100	100	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
100-252	F	S01	100	100	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
100-253	F	S02	100	100	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
100-253	E	S02	100	100	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
100-253	K	S02	100	100	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
100-253	D	S02	150	100	150	600	710	630	450	6	20	28,5	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
100-254	F	S01	100	100	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
100-254	K	S01	100	100	100	500	600	520	380	6	20	23	-	520	-	-	-	300	-	700	750	-	-	M16×190	18	125
100-316	F	S03	150	100	150	600	710	630	450	6	20	29	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
100-316	K	S03	150	100	150	600	710	630	450	6	20	29	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
100-316	D	S03	150	100	150	600	710	630	450	6	20	26	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
100-400	K	S05	150	100	250	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
125-315	K	S03	125	125	125	600	710	630	450	6	20	33	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
150-253	D	S02	150	150	150	600	710	630	450	6	20	33	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
150-315	F	S03	150	150	150	600	710	630	450	6	20	33	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
150-315	K	S03	150	150	150	600	710	630	450	6	20	33	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
150-315	D	S03	150	150	150	620	710	630	450	6	20	32	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
150-317	K	S03	150	150	150	600	710	630	450	6	20	33	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
150-317	D	S03	200	150	200	600	710	630	450	6	20	33	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
150-400	D	S05	200	150	250	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	D	S05	250	150	300	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S06	250	150	300	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-403	K	S05	200	150	250	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-

Size	Impeller type	Bearing bracket	Flange			Soleplate							Foundation / foundation rails											Chemical anchors		
			DN_1	DN_2	DN_0	f_3	f_4	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L
150-503	K	S06	150	150	250	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-
150-503	K	S07	150	150	250	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-
150-503	D	S06	200	150	300	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-
150-503	D	S07	200	150	300	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-
200-315	K	S03	200	200	200	700	710	630	550	6	20	37	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
200-315	D	S03	200	200	200	730	710	630	550	6	20	37	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
200-316	K	S03	200	200	200	700	710	630	550	6	20	37	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
200-317	K	S03	200	200	200	700	710	630	550	6	20	37	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
200-318	K	S03	200	200	200	700	710	630	550	6	20	37	-	630	-	-	-	450	-	800	850	-	-	M16×190	18	125
200-330	K	S05	250	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S06	250	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-401	K	S05	200	200	300	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-402	K	S05	200	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S06	200	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S06	250	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S06	200	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S06	250	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-501	K	S06	250	200	300	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-502	K	S06	200	200	300	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-502	K	S07	200	200	300	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-503	K	S06	200	200	300	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-503	K	S07	200	200	300	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-503	D	S06	250	200	350	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-503	D	S07	250	200	350	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-504	K	S06	250	200	350	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-504	K	S07	250	200	350	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-505	K	S06	250	200	350	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-505	K	S07	250	200	350	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-631	K	S07	250	200	350	700	970	550	900	40	35	-	770	900	990	20	300	650	550	1100	1200	M30	300	-	-	-
200-631	K	S08	250	200	350	700	970	550	900	40	35	-	770	900	990	20	300	650	550	1100	1200	M30	300	-	-	-
250-400	K	S05	250	250	350	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-400	D	S05	250	250	350	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S06	250	250	350	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-401	K	S05	250	250	350	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S06	250	250	350	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S06	250	250	350	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S06	250	250	350	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-630	K	S07	250	250	350	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-
250-630	K	S08	250	250	350	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-

Size	Impeller type	Bearing bracket	Flange			Soleplate							Foundation / foundation rails											Chemical anchors		
			DN_1	DN_2	DN_0	f_3	f_4	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L
250-632	K	S07	250	250	350	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-
250-632	K	S08	250	250	350	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-
250-900	K	S09	350	250	500	850	1300	700	1220	35	39	-	950	1220	1300	30	300	850	600	1000	1500	M30	300	-	-	-
300-400	K	S05	300	300	400	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S06	300	300	400	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S06	300	300	400	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-500	K	S06	300	300	400	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-500	K	S07	300	300	400	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-502	D	S06	300	300	400	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-502	D	S07	300	300	400	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-505	K	S06	300	300	400	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-505	K	S07	300	300	400	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-505	D	S06	300	300	400	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-505	D	S07	300	300	400	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
350-500	K	S06	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-500	K	S07	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-501	K	S06	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-501	K	S07	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-502	D	S06	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-502	D	S07	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-503	K	S06	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-503	K	S07	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-503	D	S06	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-503	D	S07	350	350	500	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-632	K	S07	350	350	500	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-
350-632	K	S08	350	350	500	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-
350-633	K	S07	350	350	500	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-
350-633	K	S08	350	350	500	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-
350-710	K	S08	350	350	500	750	1150	600	1030	30	33	-	850	1030	1150	30	300	750	550	1100	1300	M30	300	-	-	-
350-713	K	S08	350	350	500	750	1150	600	1030	30	33	-	850	1030	1150	30	300	750	550	1100	1300	M30	300	-	-	-
350-713	K	S09	350	350	500	750	1150	600	1030	30	33	-	850	1030	1150	30	300	750	550	1100	1300	M30	300	-	-	-
400-500	K	S06	400	400	600	850	1150	650	1000	35	33	-	850	1000	1090	30	300	750	550	1100	1600	M30	300	-	-	-
400-500	K	S07	400	400	600	850	1150	650	1000	35	33	-	850	1000	1090	30	300	750	550	1100	1600	M30	300	-	-	-
400-632	K	S08	500	400	600	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-
400-710	K	S09	500	400	700	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-
400-713	K	S09	500	400	700	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-
400-820	K	S09	500	400	600	850	1300	700	1220	40	42	-	950	1220	1310	20	300	850	550	1100	2100	M36	300	-	-	-
400-900	K	S09	500	400	600	850	1300	700	1220	40	35	-	1070	1220	1310	20	300	850	550	1100	2100	M30	300			
500-634	K	S07	500	500	700	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-
500-634	K	S08	500	500	700	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-
500-632	K	S08	500	500	700	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-

Size	Impeller type	Bearing bracket	Flange			Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0	f_3	f_4	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L
500-710	K	S09	500	500	700	1200	1600	1000	1500	40	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-
500-900	K	S09	600	500	800	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	950	800	1600	1800	M30	300	-	-	-
500-900	K	S10	600	500	800	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	950	800	1600	1800	M30	300	-	-	-
600-520	K	S07	600	600	800	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	900	750	1500	1800	M30	300	-	-	-
600-710	K	S08	600	600	800	1200	1700	1000	1600	45	35	-	1300	1600	1700	30	300	1000	750	1500	2100	M30	300	-	-	-
600-900	K	S10	700	600	800	1200	1700	1000	1600	45	35	-	1300	1600	1700	30	300	1100	750	1500	2100	M30	300	-	-	-
700-902	K	S08	750	750	900	1200	1700	1000	1600	45	35	-	1300	1600	1700	30	300	1100	750	1500	2100	M30	300	-	-	-
700-902	K	S09	750	750	900	1200	1700	1000	1600	45	35	-	1300	1600	1700	30	300	1100	750	1500	2100	M30	300	-	-	-

Installation type VU

Table 9: Installation type VU [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg] ⑧	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
100-400	K	S05	19	150	100	250	284 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	286 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	324 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	326 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	364 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	365 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	404 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	405 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	444 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-400	K	S05	19	150	100	250	445 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	284 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	F	S05	19	125	100	125	286 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	324 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	326 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	364 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	365 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	404 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	405 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	444 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	F	S05	19	125	100	125	445 T	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	K	S05	19	125	100	125	284 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	286 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	324 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	326 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	364 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	365 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	404 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	405 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	444 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-401	K	S05	19	125	100	125	445 T	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	410	◎
100-403	D	S05	19	200	100	300	284 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	286 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	324 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	326 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	364 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	365 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	404 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	405 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	444 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
100-403	D	S05	19	200	100	300	445 T	-	-	726	-	400	-	-	370	100	60	-	63,2	18	483	160	645	150	465	◎
150-400	D	S05	19	200	150	250	284 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	D	S05	19	200	150	250	286 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	D	S05	19	200	150	250	324 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg] ®	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
150-400	D	S05	19	200	150	250	326 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	D	S05	19	200	150	250	364 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	D	S05	19	200	150	250	365 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	D	S05	19	200	150	250	404 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	D	S05	19	200	150	250	405 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	D	S05	19	200	150	250	444 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	D	S05	19	200	150	250	445 T	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	640	◎
150-400	K	S05	19	200	150	250	284 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	286 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	324 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	326 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	364 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	365 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	404 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	405 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	444 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-400	K	S05	19	200	150	250	445 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-401	F	S05	19	150	150	250	284 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	286 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	324 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	326 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	364 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	365 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	404 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	405 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	444 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	F	S05	19	150	150	250	445 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	284 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	286 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	324 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	326 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	364 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	365 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	404 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	405 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	444 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	K	S05	19	150	150	250	445 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	535	-
150-401	D	S05	19	250	150	300	284 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	286 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	324 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	326 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	364 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	365 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	404 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	405 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	444 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎
150-401	D	S05	19	250	150	300	445 T	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	810	150	810	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg] ⑧	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
150-401	D	S06	19	250	150	300	[6]	-	-	968	-	475	-	-	420	120	75	-	79,7	20	483	400	810	150	920	◎
150-403	K	S05	19	200	150	250	284 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	286 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	324 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	326 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	364 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	365 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	404 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	405 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	444 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	K	S05	19	200	150	250	445 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
150-403	D	S05	19	200	150	250	284 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	286 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	324 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	326 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	364 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	365 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	404 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	405 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	444 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-403	D	S05	19	200	150	250	445 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	480	◎
150-503	K	S06	19	150	150	250	[6]	-	-	1003	-	500	-	-	380	118	75	-	79,7	20	420	238	602	100	950	◎
150-503	K	S07	19	150	150	250	[6]	-	-	1148	-	500	-	-	380	118	95	-	100,2	25	420	238	602	100	1065	◎
150-503	D	S06	19	200	150	300	[6]	-	-	1003	-	500	-	-	380	118	75	-	79,7	20	483	180	645	150	970	◎
150-503	D	S07	19	200	150	300	[6]	-	-	1148	-	500	-	-	380	118	95	-	100,2	25	483	180	645	150	1085	◎
151-401	K	S05	19	150	150	250	284 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	286 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	324 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	326 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	364 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	365 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	404 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	405 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	444 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-401	K	S05	19	150	150	250	445 T	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	585	-
151-403	K	S05	19	200	150	250	284 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
151-403	K	S05	19	200	150	250	286 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
151-403	K	S05	19	200	150	250	324 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
151-403	K	S05	19	200	150	250	326 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
151-403	K	S05	19	200	150	250	364 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
151-403	K	S05	19	200	150	250	365 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
151-403	K	S05	19	200	150	250	404 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
151-403	K	S05	19	200	150	250	405 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎

6 Consult the manufacturer.

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg] ®	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
151-403	K	S05	19	200	150	250	444 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
151-403	K	S05	19	200	150	250	445 T	-	-	721	-	500	-	-	390	100	60	-	63,2	18	420	205	592	150	605	◎
200-330	K	S05	19	250	200	300	284 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	286 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	324 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	326 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	364 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	365 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	404 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	405 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	444 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-330	K	S05	19	250	200	300	445 T	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	550	◎
200-400	K	S05	19	200	200	300	284 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	286 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	324 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	326 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	364 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	365 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	404 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	405 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	444 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	K	S05	19	200	200	300	445 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	◎
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	-
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	-
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	-
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	-
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	-
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	-
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	-
200-400	D	S05	19	250	200	300	284 T	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	825	-
200-400	D	S06	19	250	200	300	[6]	-	-	985	-	520	-	-	550	125	75	-	79,7	20	483	362	790	150	840	◎
200-401	K	S05	19	200	200	300	284 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	286 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	324 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	326 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	364 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	365 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	404 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	405 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	444 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-401	K	S05	19	200	200	300	445 T	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	520	-
200-402	K	S05	19	200	200	300	284 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S05	19	200	200	300	286 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S05	19	200	200	300	324 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg] ⑧	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
200-402	K	S05	19	200	200	300	326 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S05	19	200	200	300	364 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S05	19	200	200	300	365 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S05	19	200	200	300	404 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S05	19	200	200	300	405 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S05	19	200	200	300	444 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S05	19	200	200	300	445 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-402	K	S06	19	200	200	300	[6]	-	-	953	-	500	-	-	440	140	75	-	79,7	20	483	215	645	150	575	◎
200-402	D	S05	19	250	200	300	284 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	286 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	324 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	326 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	364 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	365 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	404 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	405 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	444 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05	19	250	200	300	445 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S06	19	250	200	300	-	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-403	K	S05	19	200	200	300	284 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	286 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	324 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	326 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	364 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	365 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	404 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	405 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	444 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S05	19	200	200	300	445 T	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-403	K	S06	19	200	200	300	[6]	-	-	953	-	500	-	-	440	140	75	-	79,7	20	483	215	645	150	575	◎
200-405	D	S05	19	250	200	300	284 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	286 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	324 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	326 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	364 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	365 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	404 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	405 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	444 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05	19	250	200	300	445 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S06	19	250	200	300	-	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-501	K	S06	19	250	200	300	[6]	-	-	1020	-	560	-	-	470	118	75	-	79,7	20	483	275	685	150	1055	◎
200-502	K	S06	19	200	200	300	[6]	-	-	1015	-	560	-	-	470	118	75	-	79,7	20	483	200	683	150	1065	◎
200-502	K	S07	19	200	200	300	[6]	-	-	1160	-	560	-	-	470	118	95	-	100,2	25	483	200	683	150	1130	◎
200-503	K	S06	19	200	200	300	[6]	-	-	1015	-	560	-	-	470	118	75	-	79,7	20	483	200	683	150	1065	◎
200-503	K	S07	19	200	200	300	[6]	-	-	1160	-	560	-	-	470	118	95	-	100,2	25	483	200	683	150	1130	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg] ®	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
200-503	D	S06	19	250	200	300	[6]	-	-	1015	-	560	-	-	470	118	75	-	79,7	20	547	200	749	150	1080	◎
200-503	D	S07	19	250	200	300	[6]	-	-	1160	-	560	-	-	470	118	95	-	100,2	25	547	200	749	150	1145	◎
200-504	K	S06	19	250	200	300	-	-	-	1015	-	560	-	-	470	118	75	-	79,7	20	547	200	749	150	1065	◎
200-504	K	S07	19	250	200	300	-	-	-	1160	-	560	-	-	470	118	95	-	100,2	25	547	200	749	150	1130	◎
200-505	K	S06	19	250	200	300	-	-	-	1015	-	560	-	-	470	118	75	-	79,7	20	547	200	749	150	1065	◎
200-505	K	S07	19	250	200	300	-	-	-	1160	-	560	-	-	470	118	95	-	100,2	25	547	200	749	150	1130	◎
200-631	K	S07	19	250	200	350	[6]	-	-	1171	-	650	-	-	550	140	95	-	100,2	25	547	300	779	150	1455	◎
200-631	K	S08	19	250	200	350	[6]	-	-	1171	-	650	-	-	550	140	110	-	116,2	28	547	300	779	150	1465	◎
250-400	D	S05	19	250	250	350	284 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	286 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	324 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	326 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	364 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	365 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	404 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	405 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	444 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S05	19	250	250	350	445 T	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	750	◎
250-400	D	S06	19	250	250	350	[6]	-	-	1045	-	600	-	-	550	143	75	-	79,7	20	547	315	799	150	955	◎
250-401	K	S05	19	250	250	350	284 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	286 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	324 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	326 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	364 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	365 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	404 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	405 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	444 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S05	19	250	250	350	445 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-401	K	S06	19	250	250	350	[6]	-	-	960	-	600	-	-	500	143	75	-	79,7	20	547	315	729	150	805	◎
250-402	D	S05	19	250	250	350	284 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	286 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	324 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	326 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	364 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	365 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	404 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	405 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	444 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S05	19	250	250	350	445 T	-	-	737	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-402	D	S06	19	250	250	350	[6]	-	-	967	-	600	-	-	500	143	75	-	79,7	20	547	315	729	150	605	◎
250-403	K	S05	19	250	250	350	284 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S05	19	250	250	350	286 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S05	19	250	250	350	324 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S05	19	250	250	350	326 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S05	19	250	250	350	364 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg] ®	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
250-403	K	S05	19	250	250	350	365 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S05	19	250	250	350	404 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S05	19	250	250	350	405 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S05	19	250	250	350	444 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S05	19	250	250	350	445 T	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	600	◎
250-403	K	S06	19	250	250	350	[6]	-	-	960	-	600	-	-	500	143	75	-	79,7	20	547	315	729	150	805	◎
250-630	K	S07	19	250	250	350	[6]	-	-	1190	-	700	-	-	590	143	95	-	100,2	25	547	225.5	747	150	1300	◎
250-630	K	S08	19	250	250	350	[6]	-	-	1190	-	700	-	-	590	143	110	-	116,2	28	547	225.5	747	150	1330	◎
250-632	K	S07	19	250	250	350	[6]	-	-	1190	-	700	-	-	590	143	95	-	100,2	25	547	225.5	747	150	1300	◎
250-632	K	S08	19	250	250	350	[6]	-	-	1190	-	700	-	-	590	143	110	-	116,2	28	547	225.5	747	150	1330	◎
300-400	K	S05	19	300	300	400	284 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	286 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	324 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	326 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	364 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	365 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	404 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	405 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	444 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	K	S05	19	300	300	400	445 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-400	D	S05	19	300	300	400	284 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	286 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	324 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	326 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	364 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	365 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	404 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	405 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	444 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S05	19	300	300	400	445 T	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	905	◎
300-400	D	S06	19	300	300	400	[6]	-	-	980	-	625	-	-	610	143	75	-	79,7	20	610	315	931,5	150	1015	◎
300-401	K	S05	19	300	300	400	284 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	286 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	324 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	326 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	364 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	365 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	404 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	405 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	444 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-401	K	S05	19	300	300	400	445 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-402	D	S05	19	300	300	400	284 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	19	300	300	400	286 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	19	300	300	400	324 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	19	300	300	400	326 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	19	300	300	400	364 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg] ⑧	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
300-402	D	S05	19	300	300	400	365 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	19	300	300	400	404 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	19	300	300	400	405 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	19	300	300	400	444 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05	19	300	300	400	445 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-402	D	S06	19	300	300	400	[6]	-	-	980	-	625	-	-	590	143	75	-	79,7	20	610	315	826,5	150	755	◎
300-403	K	S05	19	300	300	400	284 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	286 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	324 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	326 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	364 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	365 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	404 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	405 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	444 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-403	K	S05	19	300	300	400	445 T	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	750	◎
300-500	K	S06	19	300	300	400	[6]	-	-	1045	-	600	-	-	530	143	75	-	79,7	20	610	250	819,5	150	910	◎
300-500	K	S07	19	300	300	400	[6]	-	-	1190	-	600	-	-	530	143	95	-	100,2	25	610	250	819,5	150	990	◎
300-502	D	S06	19	300	300	400	[6]	-	-	1045	-	600	-	-	530	143	75	-	79,7	20	610	250	819,5	150	945	◎
300-502	D	S07	19	300	300	400	[6]	-	-	1190	-	600	-	-	530	143	95	-	100,2	25	610	250	819,5	150	1025	◎
300-505	K	S06	19	300	300	400	[6]	-	-	1045	-	600	-	-	530	143	75	-	79,7	20	610	250	819,5	150	915	◎
300-505	K	S07	19	300	300	400	[6]	-	-	1190	-	600	-	-	530	143	95	-	100,2	25	610	250	819,5	150	985	◎
300-505	D	S06	19	300	300	400	[6]	-	-	1045	-	600	-	-	530	143	75	-	79,7	20	610	250	819,5	150	955	◎
300-505	D	S07	19	300	300	400	[6]	-	-	1190	-	600	-	-	530	143	95	-	100,2	25	610	250	819,5	150	1035	◎
350-500	K	S06	19	350	350	500	[6]	-	-	1045	-	685	-	-	590	143	75	-	79,7	20	737	330	1027	200	1080	◎
350-500	K	S07	19	350	350	500	[6]	-	-	1190	-	685	-	-	590	143	95	-	100,2	25	737	330	1027	200	1190	◎
350-502	D	S06	19	350	350	500	[6]	-	-	1045	-	685	-	-	590	143	75	-	79,7	20	737	330	1027	200	1130	◎
350-502	D	S07	19	350	350	500	[6]	-	-	1190	-	685	-	-	590	143	95	-	100,2	25	737	330	1027	200	1240	◎
350-503	K	S06	19	350	350	500	[6]	-	-	1045	-	685	-	-	590	143	75	-	79,7	20	737	330	1027	200	1080	◎
350-503	K	S07	19	350	350	500	[6]	-	-	1190	-	685	-	-	590	143	95	-	100,2	25	737	330	1027	200	1190	◎
350-503	D	S06	19	350	350	500	[6]	-	-	1045	-	685	-	-	590	143	75	-	79,7	20	737	330	1027	200	1130	◎
350-503	D	S07	19	350	350	500	[6]	-	-	1190	-	685	-	-	590	143	95	-	100,2	25	737	330	1027	200	1240	◎
350-632	K	S07	19	350	350	500	[6]	-	-	1190	-	820	-	-	655	143	95	-	100,2	25	737	310	987	200	1550	◎
350-632	K	S08	19	350	350	500	[6]	-	-	1190	-	820	-	-	655	143	110	-	116,2	28	737	310	987	200	1580	◎
350-633	K	S07	19	350	350	500	[6]	-	-	1190	-	820	-	-	655	143	95	-	100,2	25	737	310	987	200	1550	◎
350-633	K	S08	19	350	350	500	[6]	-	-	1190	-	820	-	-	655	143	110	-	116,2	28	737	310	987	200	1580	◎
350-710	K	S08	19	350	350	500	[6]	-	-	1175	-	820	-	-	500	143	110	-	116,2	28	737	370	1012	200	1905	-
350-713	K	S08	19	350	350	500	[6]	-	-	1183	-	820	-	-	590	143	110	-	116,2	28	737	370	1029	200	1905	-
400-500	K	S06	19	400	400	600	[6]	-	-	1056	-	835	-	-	725	200	75	-	79,7	20	864	355	1164	200	1725	◎
400-500	K	S07	19	400	400	600	[6]	-	-	1202	-	835	-	-	725	200	95	-	100,2	25	864	355	1164	200	1785	◎
500-632	K	S08	19	500	500	700	[6]	-	-	1221	-	1000	-	-	815	200	110	-	116,2	28	900	355	1255	200	2830	-
500-634	K	S07	19	500	500	700	[6]	-	-	1221	-	1000	-	-	815	200	95	-	100,2	25	900	355	1255	200	2360	-
500-634	K	S08	19	500	500	700	[6]	-	-	1221	-	1000	-	-	815	200	110	-	116,2	28	900	355	1255	200	2830	-
600-520	K	S07	19	600	600	800	[6]	-	-	1382	-	1060	-	-	910	200	95	-	100,2	25	1000	460	1450	200	2780	-

Installation type VU: Soleplate and foundation / foundation rails

Table 10: Installation type VU: Soleplate and foundation / foundation rails [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V	-	øN	L
100-400	K	S05	150	100	250	284 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	286 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	324 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	326 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	364 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	365 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	404 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	405 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	444 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-400	K	S05	150	100	250	445 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	284 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	286 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	324 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	326 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	364 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	365 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	404 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	405 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	444 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	F	S05	125	100	125	445 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	284 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	286 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	324 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	326 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	364 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	365 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	404 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	405 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	444 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-401	K	S05	125	100	125	445 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	284 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	286 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	324 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	326 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	364 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	365 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	404 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	405 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	444 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
100-403	D	S05	200	100	300	445 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-
150-400	D	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	D	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	D	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	D	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	s_2	[kg]	C	D	E	F	G	H	M	J Ⓒ	K Ⓒ	s_3	Profile V	-	øN	L
150-400	D	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	D	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	D	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	D	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	D	S05	200	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	D	S05	200	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-400	K	S05	200	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	F	S05	150	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	K	S05	150	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-401	D	S05	250	150	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-401	D	S05	250	150	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V	-	øN	L
150-401	D	S06	250	150	300	[7]	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
150-403	K	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	K	S05	200	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-403	D	S05	200	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-401	K	S05	150	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
151-403	K	S05	200	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
150-503	K	S06	150	150	250	[7]	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-
150-503	K	S07	150	150	250	[7]	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-
150-503	D	S06	200	150	300	[7]	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-

7 Consult the manufacturer.

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	s_2	[kg]	C	D	E	F	G	H	M	J Ⓒ	K Ⓒ	s_3	Profile V	-	øN	L
150-503	D	S07	200	150	300	7)	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-
200-330	K	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-330	K	S05	250	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	K	S05	200	200	300	284 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	286 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	324 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	326 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	364 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	365 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	404 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	405 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	444 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	K	S05	200	200	300	445 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-400	D	S06	250	200	300	7)	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-401	K	S05	200	200	300	284 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	286 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	324 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	326 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	364 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	365 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	404 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	405 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	444 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-401	K	S05	200	200	300	445 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-
200-402	K	S05	200	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S05	200	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S05	200	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S05	200	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S05	200	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	s_2	[kg]	C	D	E	F	G	H	M	J Ⓒ	K Ⓒ	s_3	Profile V	-	øN	L
200-402	K	S05	200	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S05	200	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S05	200	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S05	200	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S05	200	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	K	S06	200	200	300	7)	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S05	250	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-402	D	S06	250	200	300	7)	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S05	200	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-403	K	S06	200	200	300	7)	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S05	250	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-405	D	S06	250	200	300	7)	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-
200-501	K	S06	250	200	300	7)	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-
200-502	K	S06	200	200	300	7)	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-502	K	S07	200	200	300	7)	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-503	K	S06	200	200	300	7)	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-503	K	S07	200	200	300	7)	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-503	D	S06	250	200	300	7)	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-503	D	S07	250	200	300	7)	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-504	K	S06	250	200	300	-	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V	-	øN	L
200-504	K	S07	250	200	300	-	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-505	K	S06	250	200	300	-	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-505	K	S07	250	200	300	-	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
200-631	K	S07	250	200	350	7)	700	970	550	900	40	35	-	770	900	990	20	300	650	550	1100	1200	M30	300	-	-	-
200-631	K	S08	250	200	350	7)	700	970	550	900	40	35	-	770	900	990	20	300	650	550	1100	1200	M30	300	-	-	-
250-400	D	S05	250	250	350	284 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	286 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	324 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	326 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	364 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	365 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	404 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	405 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	444 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S05	250	250	350	445 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-400	D	S06	250	250	350	7)	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-
250-401	K	S05	250	250	350	284 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	286 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	324 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	326 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	364 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	365 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	404 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S05	250	250	350	445 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-401	K	S06	250	250	350	7)	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	284 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	286 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	324 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	326 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	364 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	365 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	404 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S05	250	250	350	445 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-402	D	S06	250	250	350	7)	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	284 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	286 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	324 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	326 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	364 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	365 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	404 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S05	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V	-	øN	L
250-403	K	S05	250	250	350	445 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-403	K	S06	250	250	350	7)	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-
250-630	K	S07	250	250	350	7)	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-
250-630	K	S08	250	250	350	7)	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-
250-632	K	S07	250	250	350	7)	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-
250-632	K	S08	250	250	350	7)	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-
300-400	K	S05	300	300	400	284 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	286 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	324 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	326 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	404 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	405 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	444 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	K	S05	300	300	400	445 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	284 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	286 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	324 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	326 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	444 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S05	300	300	400	445 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-400	D	S06	300	300	400	7)	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	284 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	286 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	324 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	326 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	404 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	405 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	444 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-401	K	S05	300	300	400	445 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	284 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	286 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	324 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	326 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	404 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	405 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	444 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-402	D	S05	300	300	400	445 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors		
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V	-	øN	L
300-402	D	S06	300	300	400	7)	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	284 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	286 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	324 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	326 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	404 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	405 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	444 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-403	K	S05	300	300	400	445 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-
300-500	K	S06	300	300	400	7)	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-500	K	S07	300	300	400	7)	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-502	D	S06	300	300	400	7)	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-502	D	S07	300	300	400	7)	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-505	K	S06	300	300	400	7)	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-505	K	S07	300	300	400	7)	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-505	D	S06	300	300	400	7)	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
300-505	D	S07	300	300	400	7)	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-
350-500	K	S06	350	350	500	7)	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-500	K	S07	350	350	500	7)	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-502	D	S06	350	350	500	7)	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-502	D	S07	350	350	500	7)	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-503	K	S06	350	350	500	7)	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-503	K	S07	350	350	500	7)	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-503	D	S06	350	350	500	7)	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-503	D	S07	350	350	500	7)	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-
350-632	K	S07	350	350	500	7)	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-
350-632	K	S08	350	350	500	7)	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-
350-633	K	S07	350	350	500	7)	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-
350-633	K	S08	350	350	500	7)	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-
350-710	K	S08	350	350	500	7)	750	1150	600	1030	30	33	-	850	1030	1150	30	300	750	550	1100	1300	M30	300	-	-	-
350-713	K	S08	350	350	500	7)	750	1150	600	1030	30	33	-	850	1030	1150	30	300	750	550	1100	1300	M30	300	-	-	-
400-500	K	S06	400	400	600	7)	850	1150	650	1000	35	33	-	850	1000	1090	30	300	750	550	1100	1600	M30	300	-	-	-
400-500	K	S07	400	400	600	7)	850	1150	650	1000	35	33	-	850	1000	1090	30	300	750	550	1100	1600	M30	300	-	-	-
500-632	K	S08	500	500	700	7)	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-
500-634	K	S07	500	500	700	7)	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-
500-634	K	S08	500	500	700	7)	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-
600-520	K	S07	600	600	800	7)	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	900	750	1500	1800	M30	300	-	-	-

Installation type VGW

Table 11: Installation type VGW, IEC motors [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor Ⓚ	Pump									Shaft stub				Pump set / elbow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
100-400	K	S05		150	100	250	160 M to 280 M	-	-	746	-	400	-	-	370	100	60	-	63,2	18	420	169	572	100	465	◎
100-401	E,F,K	S05		125	100	125	160 M to 280 M	-	-	740	-	400	-	-	370	120	60	-	63,2	18	200	160	362	120	360	◎
150-400	D	S05		200	150	250	160 M to 280 M	-	-	725	-	400	-	-	365	100	60	-	63,2	18	420	300	692	150	590	◎
150-400	K	S05		200	150	300	160 M to 280 M	-	-	721	-	500	-	-	390	100	60	-	63,2	18	483	205	655	150	605	◎
150-401	E,F,K	S05		150	150	250	160 M to 280 M	-	-	750	-	500	-	-	360	120	60	-	63,2	18	420	238	602	100	480	-
150-401	E	S06		150	150	250	160 M to 315 L	-	-	980	-	500	-	-	360	120	75	-	79,7	20	420	238	602	100	535	◎
150-401	D	S05		250	150	300	160 M to 280 M	-	-	738	-	475	-	-	420	120	60	-	63,2	18	483	400	735	150	605	◎
150-401	D	S06		250	150	300	160 M to 315 L	-	-	968	-	475	-	-	420	120	75	-	79,7	20	483	400	735	150	805	◎
150-500	K	S05		150	150	250	160 M to 280 M	-	-	720	-	500	-	-	380	118	60	-	63,2	18	420	180	580	100	435	◎
200-330	K	S05		250	200	300	160 M to 280 M	-	-	755	-	500	-	-	425	118	60	-	63,2	18	483	268	665	150	500	◎
200-400	E,K	S05		200	200	300	160 M to 280 M	-	-	800	-	500	-	-	350	200	60	-	63,2	18	483	250	710	150	470	-
200-400	E	S06		200	200	300	160 M to 315 L	-	-	1030	-	500	-	-	350	200	75	-	79,7	20	483	250	710	150	525	◎
200-400	D	S05		250	200	300	160 M to 280 M	-	-	755	-	520	-	-	550	125	60	-	63,2	18	483	362	790	150	620	◎
200-400	D	S06		250	200	300	160 M to 315 L	-	-	985	-	520	-	-	550	125	75	-	79,7	20	483	362	790	150	820	◎
200-402	K	S05		200	200	300	160 M to 280 M	-	-	723	-	500	-	-	440	140	60	-	63,2	18	483	215	645	150	520	◎
200-500	E	S05		200	200	300	160 M to 280 M	-	-	800	-	560	-	-	510	200	60	-	63,2	18	483	280	733	150	535	-
200-500	K	S06		200	200	300	160 M to 315 L	-	-	1015	-	560	-	-	470	118	75	-	79,7	20	483	200	683	150	670	◎
200-500	K	S07		200	200	300	225 S to 315 L	-	-	1160	-	560	-	-	470	118	95	-	100,2	25	483	200	683	150	750	◎
250-400	K	S05		250	250	350	160 M to 280 M	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-400	D	S05		250	250	350	160 M to 280 M	-	-	815	-	600	-	-	550	143	60	-	63,2	18	547	315	799	150	690	◎
250-400	D	S06		250	250	350	160 M to 315 L	-	-	1045	-	600	-	-	550	143	75	-	79,7	20	547	315	799	150	880	◎
250-401	K	S05		250	250	350	160 M to 280 M	-	-	730	-	600	-	-	500	143	60	-	63,2	18	547	315	729	150	550	◎
250-500	E	S06		250	250	350	160 M to 280 M	-	-	1105	-	670	-	-	480	200	75	-	79,7	20	547	300	797	150	765	-
250-500	E	S07		250	250	350	225 S to 315 L	-	-	1250	-	670	-	-	480	200	95	-	100,2	25	547	300	797	150	845	-
250-630	K	S07		250	250	350	225 S to 315 L	-	-	1190	-	700	-	-	590	143	95	-	100,2	25	547	225.5	747	150	1080	◎
250-630	K	S08		250	250	350	225 S to 315 L	-	-	1190	-	700	-	-	590	143	110	-	116,2	28	547	225.5	747	150	1110	◎
250-630	E	S07		250	250	350	225 S to 315 L	-	-	1250	-	750	-	-	620	200	95	-	100,2	25	547	360	862	150	1120	-
250-630	E	S08		250	250	350	225 S to 315 L	-	-	1250	-	750	-	-	620	200	110	-	116,2	28	547	360	862	150	1150	-
300-400	K	S05		300	300	400	160 M to 280 M	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-400	D	S05		300	300	400	160 M to 280 M	-	-	752	-	625	-	-	610	143	60	-	63,2	18	610	315	931,5	150	845	◎
300-400	D	S06		300	300	400	160 M to 315 L	-	-	980	-	625	-	-	610	143	75	-	79,7	20	610	315	931,5	150	985	◎
300-401	K	S05		300	300	400	160 M to 280 M	-	-	750	-	625	-	-	590	143	60	-	63,2	18	610	315	826,5	150	700	◎
300-500	K	S06		300	300	400	160 M to 315 L	-	-	1045	-	600	-	-	530	143	75	-	79,7	20	610	250	819,5	150	740	◎
300-500	K	S07		300	300	400	225 S to 315 L	-	-	1190	-	600	-	-	530	143	95	-	100,2	25	610	250	819,5	150	820	◎
300-630	E	S07		300	300	400	225 S to 315 L	-	-	1250	-	500	-	-	730	200	95	-	100,2	25	610	350	889,5	150	1110	◎Ⓣ
300-630	E	S08		300	300	400	225 S to 315 L	-	-	1250	-	500	-	-	730	200	110	-	116,2	28	610	350	889,5	150	1140	◎Ⓣ
350-500	K	S06		350	350	500	160 M to 315 L	-	-	1045	-	685	-	-	590	143	75	-	79,7	20	737	330	1027	200	940	◎
350-500	K	S07		350	350	500	225 S to 315 L	-	-	1190	-	685	-	-	590	143	95	-	100,2	25	737	330	1027	200	1020	◎
350-501	K	S06		350	350	500	160 M to 315 L	-	-	1045	-	685	-	-	590	143	75	-	79,7	20	737	330	1027	200	940	◎
350-501	K	S07		350	350	500	225 S to 315 L	-	-	1190	-	685	-	-	590	143	95	-	100,2	25	737	330	1027	200	1020	◎
350-630	K	S07		350	350	500	225 S to 315 L	-	-	1190	-	820	-	-	655	143	95	-	100,2	25	737	310	987	200	1420	◎
350-630	K	S08		350	350	500	225 S to 315 L	-	-	1190	-	820	-	-	655	143	110	-	116,2	28	737	310	987	200	1450	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg]	Comments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
350-710	E	S07		400	350	600	225 S to 315 L	-	-	1250	-	560	-	-	840	200	95	-	100,2	25	864	400	1217	200	1210	◎Ⓤ
350-710	E	S08		400	350	600	225 S to 315 L	-	-	1250	-	560	-	-	840	200	110	-	116,2	28	864	400	1217	200	1240	◎Ⓤ
500-630	K	S07		500	500	700	225 S to 315 L	-	-	1221	-	1000	-	-	815	200	95	-	100,2	25	900	355	1255	200	1550	-
500-630	K	S08		500	500	700	225 S to 315 L	-	-	1221	-	1000	-	-	815	200	110	-	116,2	28	900	355	1255	200	1580	-
500-632	K	S08		500	500	700	225 S to 315 L	-	-	1221	-	1000	-	-	815	200	110	-	116,2	28	900	355	1255	200	1580	-

Table 12: Installation type VGW, NEMA motors [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Pump									Shaft stub				Pump set / elbow				[kg]	Comments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
100-400	K	S05		150	100	250	254 T	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-400	K	S05		150	100	250	256 T	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-400	K	S05		150	100	250	284 T	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-400	K	S05		150	100	250	286 T	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-400	K	S05		150	100	250	324 T	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-400	K	S05		150	100	250	326 T	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-400	K	S05		150	100	250	364 T	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-400	K	S05		150	100	250	365 T	-	-	746	-	400	-	-	370	100	60	140	63,2	18	420	169	572	100	465	◎
100-401	F	S05		125	100	125	254 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	F	S05		125	100	125	256 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	F	S05		125	100	125	284 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	F	S05		125	100	125	286 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	F	S05		125	100	125	324 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	F	S05		125	100	125	326 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	K	S05		125	100	125	254 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	K	S05		125	100	125	256 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	K	S05		125	100	125	284 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	K	S05		125	100	125	286 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	K	S05		125	100	125	324 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-401	K	S05		125	100	125	326 T	-	-	740	-	400	-	-	370	120	60	140	63,2	18	200	160	362	120	360	◎
100-403	D	S05		200	100	300	254 T	-	-	726	-	400	-	-	370	100	60	140	63,2	18	483	160	645	150	465	◎
100-403	D	S05		200	100	300	256 T	-	-	726	-	400	-	-	370	100	60	140	63,2	18	483	160	645	150	465	◎
100-403	D	S05		200	100	300	284 T	-	-	726	-	400	-	-	370	100	60	140	63,2	18	483	160	645	150	465	◎
100-403	D	S05		200	100	300	286 T	-	-	726	-	400	-	-	370	100	60	140	63,2	18	483	160	645	150	465	◎
100-403	D	S05		200	100	300	324 T	-	-	726	-	400	-	-	370	100	60	140	63,2	18	483	160	645	150	465	◎
100-403	D	S05		200	100	300	326 T	-	-	726	-	400	-	-	370	100	60	140	63,2	18	483	160	645	150	465	◎
150-400	D	S05		200	150	250	284 T	-	-	725	-	400	-	-	365	100	60	140	63,2	18	420	300	692	150	590	◎
150-400	D	S05		200	150	250	286 T	-	-	725	-	400	-	-	365	100	60	140	63,2	18	420	300	692	150	590	◎
150-400	D	S05		200	150	250	324 T	-	-	725	-	400	-	-	365	100	60	140	63,2	18	420	300	692	150	590	◎
150-400	D	S05		200	150	250	326 T	-	-	725	-	400	-	-	365	100	60	140	63,2	18	420	300	692	150	590	◎
150-400	D	S05		200	150	250	364 T	-	-	725	-	400	-	-	365	100	60	140	63,2	18	420	300	692	150	590	◎
150-400	K	S05		200	150	250	254 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-400	K	S05		200	150	250	256 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-400	K	S05		200	150	250	284 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-400	K	S05		200	150	250	286 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-400	K	S05		200	150	250	324 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor ⑥	Pump									Shaft stub				Pump set / elboow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_r	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
150-400	K	S05		200	150	250	326 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-400	K	S05		200	150	250	364 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-400	K	S05		200	150	250	365 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-400	K	S05		200	150	250	404 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-400	K	S05		200	150	250	405 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-401	F	S05		150	150	250	254 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	F	S05		150	150	250	256 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	F	S05		150	150	250	284 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	F	S05		150	150	250	286 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	F	S05		150	150	250	324 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	F	S05		150	150	250	326 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	F	S05		150	150	250	364 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	F	S05		150	150	250	365 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	254 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	256 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	284 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	286 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	324 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	326 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	364 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	365 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	404 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	405 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	444 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	445 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	K	S05		150	150	250	447 T	-	-	750	-	500	-	-	360	120	60	140	63,2	18	420	238	602	100	480	-
150-401	D	S06		250	150	300	326 T	-	-	968	-	475	-	-	420	120	75	195	79,7	20	483	400	735	150	805	◎
150-401	D	S06		250	150	300	364 T	-	-	968	-	475	-	-	420	120	75	195	79,7	20	483	400	735	150	805	◎
150-401	D	S06		250	150	300	365 T	-	-	968	-	475	-	-	420	120	75	195	79,7	20	483	400	735	150	805	◎
150-401	D	S06		250	150	300	404 T	-	-	968	-	475	-	-	420	120	75	195	79,7	20	483	400	735	150	805	◎
150-401	D	S06		250	150	300	405 T	-	-	968	-	475	-	-	420	120	75	195	79,7	20	483	400	735	150	805	◎
150-403	K	S05		200	150	250	254 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	256 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	284 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	286 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	324 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	326 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	364 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	365 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	404 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	405 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	444 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	445 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	K	S05		200	150	250	447 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	605	◎
150-403	D	S05		200	150	250	254 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	256 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	284 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor ⓚ	Pump									Shaft stub				Pump set / elbow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_r	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
150-403	D	S05		200	150	250	286 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	324 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	326 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	364 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	365 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	404 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	405 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	444 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	445 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
150-403	D	S05		200	150	250	447 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	420	205	592	150	480	◎
151-403	K	S05		200	150	250	254 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	256 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	284 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	286 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	324 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	326 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	364 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	365 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	404 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
151-403	K	S05		200	150	250	405 T	-	-	721	-	500	-	-	390	100	60	140	63,2	18	483	205	655	150	605	◎
150-503	K	S06		150	150	250	404 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	420	180	580	100	775	◎
150-503	K	S06		150	150	250	405 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	420	180	580	100	775	◎
150-503	K	S06		150	150	250	444 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	420	180	580	100	775	◎
150-503	K	S06		150	150	250	445 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	420	180	580	100	775	◎
150-503	K	S06		150	150	250	447 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	420	180	580	100	775	◎
150-503	K	S07		150	150	250	447 T	-	-	1086	-	500	-	-	380	118	95	220	100,2	25	420	180	580	100	840	◎
150-503	K	S07		150	150	250	449 T	-	-	1086	-	500	-	-	380	118	95	220	100,2	25	420	180	580	100	840	◎
150-503	D	S06		200	150	250	404 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	483	180	645	150	795	◎
150-503	D	S06		200	150	250	405 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	483	180	645	150	795	◎
150-503	D	S06		200	150	250	444 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	483	180	645	150	795	◎
150-503	D	S06		200	150	250	445 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	483	180	645	150	795	◎
150-503	D	S06		200	150	250	447 T	-	-	941	-	500	-	-	380	118	75	195	79,7	20	483	180	645	150	795	◎
150-503	D	S07		200	150	250	447 T	-	-	1086	-	500	-	-	380	118	95	220	100,2	25	483	180	645	150	860	◎
150-503	D	S07		200	150	250	449 T	-	-	1086	-	500	-	-	380	118	95	220	100,2	25	483	180	645	150	860	◎
200-330	K	S05		250	200	300	254 T	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-330	K	S05		250	200	300	256 T	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-330	K	S05		250	200	300	284 T	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-330	K	S05		250	200	300	286 T	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-330	K	S05		250	200	300	324 T	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-330	K	S05		250	200	300	326 T	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-330	K	S05		250	200	300	364 T	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-330	K	S05		250	200	300	365 T	-	-	755	-	500	-	-	425	118	60	140	63,2	18	483	268	665	150	500	◎
200-400	D	S06		250	200	300	326 T	-	-	985	-	520	-	-	550	125	75	195	79,7	20	483	362	790	150	820	◎
200-400	D	S06		250	200	300	364 T	-	-	985	-	520	-	-	550	125	75	195	79,7	20	483	362	790	150	820	◎
200-400	D	S06		250	200	300	365 T	-	-	985	-	520	-	-	550	125	75	195	79,7	20	483	362	790	150	820	◎
200-400	D	S06		250	200	300	404 T	-	-	985	-	520	-	-	550	125	75	195	79,7	20	483	362	790	150	820	◎
200-401	K	S05		200	200	300	284 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor Ⓚ	Pump									Shaft stub				Pump set / elboow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_r	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
200-401	K	S05		200	200	300	286 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-
200-401	K	S05		200	200	300	324 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-
200-401	K	S05		200	200	300	326 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-
200-401	K	S05		200	200	300	364 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-
200-401	K	S05		200	200	300	365 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-
200-401	K	S05		200	200	300	404 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-
200-401	K	S05		200	200	300	405 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-
200-401	K	S05		200	200	300	444 T	-	-	800	-	500	-	-	350	200	60	140	63,2	18	483	250	710	150	470	-
200-402	K	S05		200	200	300	284 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	286 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	324 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	326 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	364 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	365 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	404 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	405 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	444 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S05		200	200	300	445 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-402	K	S06		200	200	300	444 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	215	645	150	575	◎
200-402	K	S06		200	200	300	445 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	215	645	150	575	◎
200-402	D	S05		250	200	300	284 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	286 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	324 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	326 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	364 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	365 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	404 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	405 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	444 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S05		250	200	300	445 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-402	D	S06		250	200	300	444 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-402	D	S06		250	200	300	445 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-403	K	S05		200	200	300	284 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	286 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	324 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	326 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	364 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	365 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	404 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	405 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	444 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S05		200	200	300	445 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	215	645	150	520	◎
200-403	K	S06		200	200	300	444 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	215	645	150	575	◎
200-403	K	S06		200	200	300	445 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	215	645	150	575	◎
200-403	K	S06		200	200	300	447 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	215	645	150	575	◎
200-403	K	S06		200	200	300	449 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	215	645	150	575	◎
200-405	D	S05		250	200	300	284 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor ⊛	Pump									Shaft stub				Pump set / elboow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
200-405	D	S05		250	200	300	286 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05		250	200	300	324 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05		250	200	300	326 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05		250	200	300	364 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05		250	200	300	365 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05		250	200	300	404 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05		250	200	300	405 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05		250	200	300	444 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S05		250	200	300	445 T	-	-	723	-	500	-	-	440	140	60	140	63,2	18	483	307	710	150	470	◎
200-405	D	S06		250	200	300	444 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-405	D	S06		250	200	300	445 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-405	D	S06		250	200	300	447 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-405	D	S06		250	200	300	449 T	-	-	953	-	500	-	-	440	140	75	195	79,7	20	483	307	710	150	525	◎
200-502	K	S06		200	200	300	364 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	675	◎
200-502	K	S06		200	200	300	365 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	675	◎
200-502	K	S06		200	200	300	404 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	675	◎
200-502	K	S06		200	200	300	405 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	675	◎
200-502	K	S07		200	200	300	364 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-502	K	S07		200	200	300	365 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-502	K	S07		200	200	300	404 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-502	K	S07		200	200	300	405 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-502	K	S07		200	200	300	444 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-502	K	S07		200	200	300	445 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-502	K	S07		200	200	300	447 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S06		200	200	300	364 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	675	◎
200-503	K	S06		200	200	300	365 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	675	◎
200-503	K	S06		200	200	300	404 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	675	◎
200-503	K	S06		200	200	300	405 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	483	200	683	150	675	◎
200-503	K	S07		200	200	300	364 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	365 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	404 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	405 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	444 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	445 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	447 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	449 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	504 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	505 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	K	S07		200	200	300	586 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	483	200	683	150	755	◎
200-503	D	S06		250	200	300	364 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	690	◎
200-503	D	S06		250	200	300	365 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	690	◎
200-503	D	S06		250	200	300	404 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	690	◎
200-503	D	S06		250	200	300	405 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	690	◎
200-503	D	S07		250	200	300	364 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	365 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	404 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	405 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor Ⓚ	Pump									Shaft stub				Pump set / elboow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
200-503	D	S07		250	200	300	444 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	445 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	447 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	449 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	504 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	505 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-503	D	S07		250	200	300	586 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	770	◎
200-504	K	S06		250	200	350	364 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	675	◎
200-504	K	S06		250	200	350	365 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	675	◎
200-504	K	S06		250	200	350	404 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	675	◎
200-504	K	S06		250	200	350	405 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	675	◎
200-504	K	S07		250	200	350	364 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-504	K	S07		250	200	350	365 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-504	K	S07		250	200	350	404 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-504	K	S07		250	200	350	405 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-504	K	S07		250	200	350	444 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-504	K	S07		250	200	350	445 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-504	K	S07		250	200	350	447 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S06		250	200	350	364 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	675	◎
200-505	K	S06		250	200	350	365 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	675	◎
200-505	K	S06		250	200	350	404 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	675	◎
200-505	K	S06		250	200	350	405 T	-	-	1015	-	560	-	-	470	118	75	195	79,7	20	547	200	749	150	675	◎
200-505	K	S07		250	200	350	364 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	365 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	404 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	405 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	444 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	445 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	447 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	449 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	504 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	505 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
200-505	K	S07		250	200	350	586 T	-	-	1160	-	560	-	-	470	118	95	220	100,2	25	547	200	749	150	755	◎
250-400	K	S05		250	250	350	284 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	286 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	324 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	326 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	364 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	365 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	404 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	405 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	444 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	K	S05		250	250	350	445 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-400	D	S05		250	250	350	284 T	-	-	815	-	600	-	-	550	143	60	140	63,2	18	547	315	799	150	690	◎
250-400	D	S05		250	250	350	286 T	-	-	815	-	600	-	-	550	143	60	140	63,2	18	547	315	799	150	690	◎
250-400	D	S05		250	250	350	324 T	-	-	815	-	600	-	-	550	143	60	140	63,2	18	547	315	799	150	690	◎
250-400	D	S05		250	250	350	326 T	-	-	815	-	600	-	-	550	143	60	140	63,2	18	547	315	799	150	690	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor ⊛	Pump									Shaft stub				Pump set / elbow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
250-400	D	S06		250	250	350	324 T	-	-	1045	-	600	-	-	550	143	75	195	79,7	20	547	315	799	150	880	◎
250-400	D	S06		250	250	350	326 T	-	-	1045	-	600	-	-	550	143	75	195	79,7	20	547	315	799	150	880	◎
250-400	D	S06		250	250	350	364 T	-	-	1045	-	600	-	-	550	143	75	195	79,7	20	547	315	799	150	880	◎
250-400	D	S06		250	250	350	365 T	-	-	1045	-	600	-	-	550	143	75	195	79,7	20	547	315	799	150	880	◎
250-401	K	S05		250	250	350	284 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S05		250	250	350	286 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S05		250	250	350	324 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S05		250	250	350	326 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S05		250	250	350	364 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S05		250	250	350	365 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S05		250	250	350	404 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S05		250	250	350	405 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S05		250	250	350	444 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-401	K	S06		250	250	350	405 T	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-401	K	S06		250	250	350	444 T	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-401	K	S06		250	250	350	445 T	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-402	D	S05		250	250	350	284 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S05		250	250	350	286 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S05		250	250	350	324 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S05		250	250	350	326 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S05		250	250	350	364 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S05		250	250	350	365 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S05		250	250	350	404 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S05		250	250	350	405 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S05		250	250	350	444 T	-	-	737	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-402	D	S06		250	250	350	405 T	-	-	967	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-402	D	S06		250	250	350	444 T	-	-	967	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-402	D	S06		250	250	350	445 T	-	-	967	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-402	D	S06		250	250	350	447 T	-	-	967	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-402	D	S06		250	250	350	449 T	-	-	967	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-403	K	S05		250	250	350	284 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S05		250	250	350	286 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S05		250	250	350	324 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S05		250	250	350	326 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S05		250	250	350	364 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S05		250	250	350	365 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S05		250	250	350	404 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S05		250	250	350	405 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S05		250	250	350	444 T	-	-	730	-	600	-	-	500	143	60	140	63,2	18	547	315	729	150	550	◎
250-403	K	S06		250	250	350	405 T	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-403	K	S06		250	250	350	444 T	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-403	K	S06		250	250	350	445 T	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-403	K	S06		250	250	350	447 T	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-403	K	S06		250	250	350	449 T	-	-	960	-	600	-	-	500	143	75	195	79,7	20	547	315	729	150	605	◎
250-630	K	S07		250	250	350	444 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-630	K	S07		250	250	350	445 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-630	K	S07		250	250	350	447 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor ⓚ	Pump									Shaft stub				Pump set / elboow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
250-630	K	S07		250	250	350	449 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-630	K	S07		250	250	350	504 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-630	K	S07		250	250	350	505 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-630	K	S07		250	250	350	586 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-630	K	S07		250	250	350	587 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-632	K	S07		250	250	350	444 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-632	K	S07		250	250	350	445 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-632	K	S07		250	250	350	447 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-632	K	S07		250	250	350	449 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-632	K	S07		250	250	350	504 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-632	K	S07		250	250	350	505 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-632	K	S07		250	250	350	586 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
250-632	K	S07		250	250	350	587 T	-	-	1190	-	700	-	-	590	143	95	220	100,2	25	547	225.5	747	150	1080	◎
300-400	K	S05		300	300	400	284 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	286 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	324 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	326 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	364 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	365 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	404 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	405 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	444 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	K	S05		300	300	400	445 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-400	D	S05		300	300	400	326 T	-	-	752	-	625	-	-	610	143	60	140	63,2	18	610	315	931,5	150	845	◎
300-400	D	S05		300	300	400	364 T	-	-	752	-	625	-	-	610	143	60	140	63,2	18	610	315	931,5	150	845	◎
300-400	D	S05		300	300	400	365 T	-	-	752	-	625	-	-	610	143	60	140	63,2	18	610	315	931,5	150	845	◎
300-400	D	S06		300	300	400	364 T	-	-	980	-	625	-	-	610	143	75	195	79,7	20	610	315	931,5	150	985	◎
300-400	D	S06		300	300	400	365 T	-	-	980	-	625	-	-	610	143	75	195	79,7	20	610	315	931,5	150	985	◎
300-400	D	S06		300	300	400	404 T	-	-	980	-	625	-	-	610	143	75	195	79,7	20	610	315	931,5	150	985	◎
300-400	D	S06		300	300	400	405 T	-	-	980	-	625	-	-	610	143	75	195	79,7	20	610	315	931,5	150	985	◎
300-400	D	S06		300	300	400	444 T	-	-	980	-	625	-	-	610	143	75	195	79,7	20	610	315	931,5	150	985	◎
300-401	K	S05		300	300	400	284 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	286 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	324 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	326 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	364 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	365 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	404 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	405 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	444 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-401	K	S05		300	300	400	445 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05		300	300	400	284 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05		300	300	400	286 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05		300	300	400	324 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05		300	300	400	326 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05		300	300	400	364 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-402	D	S05		300	300	400	365 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor ⓚ	Pump									Shaft stub				Pump set / elbow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
300-402	D	S06		300	300	400	364 T	-	-	980	-	625	-	-	590	143	75	195	79,7	20	610	315	826,5	150	755	◎
300-402	D	S06		300	300	400	365 T	-	-	980	-	625	-	-	590	143	75	195	79,7	20	610	315	826,5	150	755	◎
300-402	D	S06		300	300	400	404 T	-	-	980	-	625	-	-	590	143	75	195	79,7	20	610	315	826,5	150	755	◎
300-402	D	S06		300	300	400	405 T	-	-	980	-	625	-	-	590	143	75	195	79,7	20	610	315	826,5	150	755	◎
300-402	D	S06		300	300	400	444 T	-	-	980	-	625	-	-	590	143	75	195	79,7	20	610	315	826,5	150	755	◎
300-403	K	S05		300	300	400	284 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	286 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	324 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	326 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	364 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	365 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	404 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	405 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	444 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-403	K	S05		300	300	400	445 T	-	-	750	-	625	-	-	590	143	60	140	63,2	18	610	315	826,5	150	700	◎
300-500	K	S06		300	300	400	324 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	745	◎
300-500	K	S06		300	300	400	326 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	745	◎
300-500	K	S06		300	300	400	364 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	745	◎
300-500	K	S06		300	300	400	365 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	745	◎
300-500	K	S06		300	300	400	404 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	745	◎
300-500	K	S06		300	300	400	405 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	745	◎
300-500	K	S07		300	300	400	365 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	825	◎
300-500	K	S07		300	300	400	404 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	825	◎
300-500	K	S07		300	300	400	405 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	825	◎
300-500	K	S07		300	300	400	444 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	825	◎
300-500	K	S07		300	300	400	445 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	825	◎
300-500	K	S07		300	300	400	447 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	825	◎
300-502	D	S06		300	300	400	324 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	780	◎
300-502	D	S06		300	300	400	326 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	780	◎
300-502	D	S06		300	300	400	364 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	780	◎
300-502	D	S06		300	300	400	365 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	780	◎
300-502	D	S06		300	300	400	404 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	780	◎
300-502	D	S06		300	300	400	405 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	780	◎
300-502	D	S07		300	300	400	365 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	860	◎
300-502	D	S07		300	300	400	404 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	860	◎
300-502	D	S07		300	300	400	405 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	860	◎
300-502	D	S07		300	300	400	444 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	860	◎
300-502	D	S07		300	300	400	445 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	860	◎
300-502	D	S07		300	300	400	447 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	860	◎
300-505	K	S06		300	300	400	324 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	750	◎
300-505	K	S06		300	300	400	326 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	750	◎
300-505	K	S06		300	300	400	364 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	750	◎
300-505	K	S06		300	300	400	365 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	750	◎
300-505	K	S06		300	300	400	404 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	750	◎
300-505	K	S06		300	300	400	405 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	750	◎
300-505	K	S07		300	300	400	365 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	830	◎
300-505	K	S07		300	300	400	404 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	830	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor Ⓚ	Pump								Shaft stub				Pump set / elbow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_f	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
300-505	K	S07		300	300	400	405 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	830	◎
300-505	K	S07		300	300	400	444 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	830	◎
300-505	K	S07		300	300	400	445 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	830	◎
300-505	K	S07		300	300	400	447 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	830	◎
300-505	K	S07		300	300	400	449 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	830	◎
300-505	D	S06		300	300	400	324 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	790	◎
300-505	D	S06		300	300	400	326 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	790	◎
300-505	D	S06		300	300	400	364 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	790	◎
300-505	D	S06		300	300	400	365 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	790	◎
300-505	D	S06		300	300	400	404 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	790	◎
300-505	D	S06		300	300	400	405 T	-	-	1045	-	600	-	-	530	143	75	195	79,7	20	610	250	819,5	150	790	◎
300-505	D	S07		300	300	400	365 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	870	◎
300-505	D	S07		300	300	400	404 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	870	◎
300-505	D	S07		300	300	400	405 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	870	◎
300-505	D	S07		300	300	400	444 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	870	◎
300-505	D	S07		300	300	400	445 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	870	◎
300-505	D	S07		300	300	400	447 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	870	◎
300-505	D	S07		300	300	400	449 T	-	-	1190	-	600	-	-	530	143	95	220	100,2	25	610	250	819,5	150	870	◎
350-500	K	S06		350	350	500	404 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-500	K	S06		350	350	500	405 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-500	K	S07		350	350	500	404 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-500	K	S07		350	350	500	405 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-500	K	S07		350	350	500	444 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-500	K	S07		350	350	500	445 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-500	K	S07		350	350	500	447 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-500	K	S07		350	350	500	449 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-501	K	S06		350	350	500	324 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-501	K	S06		350	350	500	326 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-501	K	S06		350	350	500	364 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-501	K	S06		350	350	500	365 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-501	K	S06		350	350	500	404 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-501	K	S06		350	350	500	405 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-501	K	S07		350	350	500	365 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-501	K	S07		350	350	500	404 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-501	K	S07		350	350	500	405 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-501	K	S07		350	350	500	444 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-501	K	S07		350	350	500	445 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-501	K	S07		350	350	500	447 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-502	D	S06		350	350	500	404 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	990	◎
350-502	D	S06		350	350	500	405 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	990	◎
350-502	D	S07		350	350	500	404 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-502	D	S07		350	350	500	405 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-502	D	S07		350	350	500	444 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-502	D	S07		350	350	500	445 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-502	D	S07		350	350	500	447 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-502	D	S07		350	350	500	449 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-503	K	S06		350	350	500	404 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor ⊛	Pump									Shaft stub				Pump set / elbow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_r	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
350-503	K	S06		350	350	500	405 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	940	◎
350-503	K	S07		350	350	500	404 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-503	K	S07		350	350	500	405 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-503	K	S07		350	350	500	444 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-503	K	S07		350	350	500	445 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-503	K	S07		350	350	500	447 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-503	K	S07		350	350	500	449 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1020	◎
350-503	D	S06		350	350	500	404 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	990	◎
350-503	D	S06		350	350	500	405 T	-	-	1045	-	685	-	-	590	143	75	195	79,7	20	737	330	1027	200	990	◎
350-503	D	S07		350	350	500	404 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-503	D	S07		350	350	500	405 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-503	D	S07		350	350	500	444 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-503	D	S07		350	350	500	445 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-503	D	S07		350	350	500	447 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-503	D	S07		350	350	500	449 T	-	-	1190	-	685	-	-	590	143	95	220	100,2	25	737	330	1027	200	1070	◎
350-632	K	S07		350	350	500	444 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-632	K	S07		350	350	500	445 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-632	K	S07		350	350	500	447 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-632	K	S07		350	350	500	449 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-632	K	S07		350	350	500	504 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-632	K	S07		350	350	500	505 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-632	K	S07		350	350	500	586 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-632	K	S08		350	350	500	587 T	-	-	1190	-	820	-	-	655	143	110	210	116,2	28	737	310	987	200	1450	◎
350-633	K	S07		350	350	500	444 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-633	K	S07		350	350	500	445 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-633	K	S07		350	350	500	447 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-633	K	S07		350	350	500	449 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-633	K	S07		350	350	500	504 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-633	K	S07		350	350	500	505 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-633	K	S07		350	350	500	586 T	-	-	1190	-	820	-	-	655	143	95	220	100,2	25	737	310	987	200	1420	◎
350-633	K	S08		350	350	500	587 T	-	-	1190	-	820	-	-	655	143	110	210	116,2	28	737	310	987	200	1450	◎
400-632	K	S08		500	400	600	444 T	-	-	1211	-	1000	-	-	850	200	110	210	116,2	28	864	355	1209	200	1900	◎
400-632	K	S08		500	400	600	445 T	-	-	1211	-	1000	-	-	850	200	110	210	116,2	28	864	355	1209	200	1900	◎
400-632	K	S08		500	400	600	447 T	-	-	1211	-	1000	-	-	850	200	110	210	116,2	28	864	355	1209	200	1900	◎
400-632	K	S08		500	400	600	449 T	-	-	1211	-	1000	-	-	850	200	110	210	116,2	28	864	355	1209	200	1900	◎
400-632	K	S08		500	400	600	504 T	-	-	1211	-	1000	-	-	850	200	110	210	116,2	28	864	355	1209	200	1900	◎
400-632	K	S08		500	400	600	505 T	-	-	1211	-	1000	-	-	850	200	110	210	116,2	28	864	355	1209	200	1900	◎
400-632	K	S08		500	400	600	586 T	-	-	1211	-	1000	-	-	850	200	110	210	116,2	28	864	355	1209	200	1900	◎
400-632	K	S08		500	400	600	587 T	-	-	1211	-	1000	-	-	850	200	110	210	116,2	28	864	355	1209	200	1900	◎
500-632	K	S08		500	500	700	444 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-632	K	S08		500	500	700	445 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-632	K	S08		500	500	700	447 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-632	K	S08		500	500	700	449 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-632	K	S08		500	500	700	504 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-632	K	S08		500	500	700	505 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-632	K	S08		500	500	700	586 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-632	K	S08		500	500	700	587 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor Ⓚ	Pump									Shaft stub				Pump set / elbow				[kg] Ⓜ	Com-ments
				DN_1	DN_2	DN_0		a	b_r	f	h_1	h_2	l	n_7	n_8	$øp_2$	$ød_2$	lw	t	u	c	e	e_1	$øp_1$		
500-634	K	S08		500	500	700	444 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-634	K	S08		500	500	700	445 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-634	K	S08		500	500	700	447 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-634	K	S08		500	500	700	449 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-634	K	S08		500	500	700	504 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-634	K	S08		500	500	700	505 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-634	K	S08		500	500	700	586 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-
500-634	K	S08		500	500	700	587 T	-	-	1221	-	1000	-	-	815	200	110	210	116,2	28	900	355	1255	200	1580	-

Installation type VGW: Soleplate and foundation / foundation rails

Table 13: Installation type VGW, IEC motors: Soleplate and foundation / foundation rails [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails										Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_0		f_2	f_3	m_1	m_2	g_2	$ø\ s_2$	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Pro-file V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
100-400	K	S05	150	100	250	160 M to 280 M	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	E,F,K	S05	125	100	125	160 M to 280 M	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	D	S05	200	150	250	160 M to 280 M	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	300	160 M to 280 M	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	E,F,K	S05	150	150	250	160 M to 280 M	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	E	S06	150	150	250	160 M to 315 L	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300/550ⓩ	280
150-401	D	S05	250	150	300	160 M to 280 M	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	D	S06	250	150	300	160 M to 315 L	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300/550ⓩ	280
150-500	K	S05	150	150	250	160 M to 280 M	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	160 M to 280 M	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-400	E,K	S05	200	200	300	160 M to 280 M	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-400	E	S06	200	200	300	160 M to 315 L	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300/550ⓩ	280
200-400	D	S05	250	200	300	160 M to 280 M	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-400	D	S06	250	200	300	160 M to 315 L	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300/550ⓩ	280
200-402	K	S05	200	200	300	160 M to 280 M	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-500	E	S05	200	200	300	160 M to 280 M	550	730	420	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-500	K	S06	200	200	300	160 M to 315 L	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300/550ⓩ	280
200-500	K	S07	200	200	300	225 S to 315 L	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300/550ⓩ	280
250-400	K	S05	250	250	350	160 M to 280 M	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S05	250	250	350	160 M to 280 M	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S06	250	250	350	160 M to 315 L	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300/550ⓩ	280
250-401	K	S05	250	250	350	160 M to 280 M	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-500	E	S06	250	250	350	160 M to 280 M	550	850	420	780	35	28	-	650	780	850	20	300	550	400	800	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-500	E	S07	250	250	350	225 S to 315 L	550	850	420	780	35	28	-	650	780	850	20	300	550	400	800	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300/550ⓩ	280
250-630	K	S07	250	250	350	225 S to 315 L	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550ⓩ	280
250-630	K	S08	250	250	350	225 S to 315 L	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550ⓩ	280
250-630	E	S07	250	250	350	225 S to 315 L	750	920	610	850	35	35	-	720	850	920	20	300	600	600	1200	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550ⓩ	280
250-630	E	S08	250	250	350	225 S to 315 L	750	920	610	850	35	35	-	720	850	920	20	300	600	600	1200	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550ⓩ	280
300-400	K	S05	300	300	400	160 M to 280 M	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails											Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	øs_1	□ B	B_1	h_3	Profile V II Ⓟ
300-400	D	S05	300	300	400	160 M to 280 M	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S06	300	300	400	160 M to 315 L	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300/550Ⓩ	280
300-401	K	S05	300	300	400	160 M to 280 M	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S06	300	300	400	160 M to 315 L	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300/550Ⓩ	280
300-500	K	S07	300	300	400	225 S to 315 L	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300/550Ⓩ	280
300-630	E	S07	300	300	400	225 S to 315 L	750	1050	620	980	35	35	-	850	980	1050	20	300	700	600	1200	1300	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550Ⓩ	280
300-630	E	S08	300	300	400	225 S to 315 L	750	1050	620	980	35	35	-	850	980	1050	20	300	700	600	1200	1300	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550Ⓩ	280
350-500	K	S06	350	350	500	160 M to 315 L	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550Ⓩ	280
350-500	K	S07	350	350	500	225 S to 315 L	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550Ⓩ	280
350-501	K	S06	350	350	500	160 M to 315 L	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550Ⓩ	280
350-501	K	S07	350	350	500	225 S to 315 L	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550Ⓩ	280
350-630	K	S07	350	350	500	225 S to 315 L	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550Ⓩ	280
350-630	K	S08	350	350	500	225 S to 315 L	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300/550Ⓩ	280
350-710	E	S07	400	350	600	225 S to 315 L	750	1150	600	1080	35	35	-	950	1080	1150	30	300	750	550	1100	1400	M30	300	-	-	-	40	1775	26	M24	1710	1900	300/550Ⓩ	280
350-710	E	S08	400	350	600	225 S to 315 L	750	1150	600	1080	35	35	-	950	1080	1150	30	300	750	550	1100	1400	M30	300	-	-	-	40	1775	26	M24	1710	1900	300/550Ⓩ	280
500-630	K	S07	500	500	700	225 S to 315 L	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	300/550Ⓩ	300
500-630	K	S08	500	500	700	225 S to 315 L	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	300/550Ⓩ	300
500-632	K	S08	500	500	700	225 S to 315 L	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	300/550Ⓩ	300

Table 14: Installation type VGW, NEMA motors: Soleplate and foundation / foundation rails [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails											Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	øs_1	□ B	B_1	h_3	Profile V II Ⓟ
100-400	K	S05	150	100	250	254 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-400	K	S05	150	100	250	256 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-400	K	S05	150	100	250	284 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-400	K	S05	150	100	250	286 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-400	K	S05	150	100	250	324 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-400	K	S05	150	100	250	326 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-400	K	S05	150	100	250	364 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-400	K	S05	150	100	250	365 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	F	S05	125	100	125	254 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	F	S05	125	100	125	256 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	F	S05	125	100	125	284 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	F	S05	125	100	125	286 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	F	S05	125	100	125	324 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	F	S05	125	100	125	326 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	K	S05	125	100	125	254 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	K	S05	125	100	125	256 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	K	S05	125	100	125	284 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	K	S05	125	100	125	286 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	K	S05	125	100	125	324 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-401	K	S05	125	100	125	326 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-403	D	S05	200	100	300	254 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-403	D	S05	200	100	300	256 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails												Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
100-403	D	S05	200	100	300	284 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-403	D	S05	200	100	300	286 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-403	D	S05	200	100	300	324 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
100-403	D	S05	200	100	300	326 T	560	560	480	480	23	24	-	400	480	560	20	220	320	300	600	700	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	D	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	D	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	D	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	D	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	D	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	254 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	256 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-400	K	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	F	S05	150	150	250	254 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	F	S05	150	150	250	256 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	F	S05	150	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	F	S05	150	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	F	S05	150	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	F	S05	150	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	F	S05	150	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	F	S05	150	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	254 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	256 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	K	S05	150	150	250	447 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	550	280
150-401	D	S06	250	150	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	D	S06	250	150	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	D	S06	250	150	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	D	S06	250	150	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-401	D	S06	250	150	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	254 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	256 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails												Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J Ⓒ	K Ⓒ	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
150-403	K	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	K	S05	200	150	250	447 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	550	280
150-403	D	S05	200	150	250	254 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	256 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
150-403	D	S05	200	150	250	447 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	550	280
150-503	K	S06	150	150	250	404 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
150-503	K	S06	150	150	250	405 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
150-503	K	S06	150	150	250	444 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
150-503	K	S06	150	150	250	445 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
150-503	K	S06	150	150	250	447 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	550	280
150-503	K	S07	150	150	250	447 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	550	280
150-503	K	S07	150	150	250	449 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	550	280
150-503	D	S06	200	150	250	404 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
150-503	D	S06	200	150	250	405 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
150-503	D	S06	200	150	250	444 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
150-503	D	S06	200	150	250	445 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
150-503	D	S06	200	150	250	447 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	550	280
150-503	D	S07	200	150	250	447 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	550	280
150-503	D	S07	200	150	250	449 T	850	850	760	760	77	28	-	670	760	850	20	260	450	500	1000	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	550	280
151-403	K	S05	200	150	250	254 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
151-403	K	S05	200	150	250	256 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
151-403	K	S05	200	150	250	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
151-403	K	S05	200	150	250	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
151-403	K	S05	200	150	250	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
151-403	K	S05	200	150	250	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
151-403	K	S05	200	150	250	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
151-403	K	S05	200	150	250	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
151-403	K	S05	200	150	250	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails												Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
151-403	K	S05	200	150	250	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	254 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	256 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-330	K	S05	250	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-400	D	S06	250	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-400	D	S06	250	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-400	D	S06	250	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-400	D	S06	250	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	415	830	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	284 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	286 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	324 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	326 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	364 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	365 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	404 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	405 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-401	K	S05	200	200	300	444 T	450	730	320	670	35	28	-	550	670	730	20	260	450	350	700	1000	M24	260	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S05	200	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S06	200	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	K	S06	200	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S05	250	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S06	250	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-402	D	S06	250	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails											Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J Ⓒ	K Ⓒ	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
200-403	K	S05	200	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S05	200	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S06	200	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S06	200	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-403	K	S06	200	200	300	447 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	550	280
200-403	K	S06	200	200	300	449 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	550	280
200-405	D	S05	250	200	300	284 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	286 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	324 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	326 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	364 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	365 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	404 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	405 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S05	250	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S06	250	200	300	444 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S06	250	200	300	445 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	300	280
200-405	D	S06	250	200	300	447 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	550	280
200-405	D	S06	250	200	300	449 T	710	710	630	630	28	24	-	550	630	710	20	220	450	450	900	850	M20	220	-	-	-	35	1125	26	M24	1060	1250	550	280
200-502	K	S06	200	200	300	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S06	200	200	300	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S06	200	200	300	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S06	200	200	300	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S07	200	200	300	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S07	200	200	300	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S07	200	200	300	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S07	200	200	300	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S07	200	200	300	444 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S07	200	200	300	445 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-502	K	S07	200	200	300	447 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	K	S06	200	200	300	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S06	200	200	300	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S06	200	200	300	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S06	200	200	300	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S07	200	200	300	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S07	200	200	300	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S07	200	200	300	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S07	200	200	300	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails												Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
200-503	K	S07	200	200	300	444 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S07	200	200	300	445 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	K	S07	200	200	300	447 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	K	S07	200	200	300	449 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	K	S07	200	200	300	504 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	K	S07	200	200	300	505 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	K	S07	200	200	300	586 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	D	S06	250	200	300	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S06	250	200	300	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S06	250	200	300	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S06	250	200	300	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S07	250	200	300	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S07	250	200	300	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S07	250	200	300	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S07	250	200	300	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S07	250	200	300	444 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S07	250	200	300	445 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-503	D	S07	250	200	300	447 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	D	S07	250	200	300	449 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	D	S07	250	200	300	504 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	D	S07	250	200	300	505 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-503	D	S07	250	200	300	586 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-504	K	S06	250	200	350	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S06	250	200	350	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S06	250	200	350	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S06	250	200	350	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S07	250	200	350	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S07	250	200	350	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S07	250	200	350	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S07	250	200	350	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S07	250	200	350	444 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S07	250	200	350	445 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-504	K	S07	250	200	350	447 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-505	K	S06	250	200	350	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S06	250	200	350	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S06	250	200	350	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S06	250	200	350	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S07	250	200	350	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S07	250	200	350	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S07	250	200	350	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S07	250	200	350	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S07	250	200	350	444 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S07	250	200	350	445 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
200-505	K	S07	250	200	350	447 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-505	K	S07	250	200	350	449 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-505	K	S07	250	200	350	504 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
200-505	K	S07	250	200	350	505 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails											Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
200-505	K	S07	250	200	350	586 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	550	280
250-400	K	S05	250	250	350	284 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	286 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	324 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	326 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	364 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	365 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	404 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	K	S05	250	250	350	445 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S05	250	250	350	284 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S05	250	250	350	286 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S05	250	250	350	324 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S05	250	250	350	326 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S06	250	250	350	324 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S06	250	250	350	326 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S06	250	250	350	364 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-400	D	S06	250	250	350	365 T	850	850	760	760	77	28	-	670	760	870	20	300	570	460	920	1000	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	284 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	286 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	324 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	326 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	364 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	365 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	404 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S05	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S06	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S06	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-401	K	S06	250	250	350	445 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	284 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	286 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	324 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	326 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	364 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	365 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	404 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S05	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S06	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S06	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S06	250	250	350	445 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-402	D	S06	250	250	350	447 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
250-402	D	S06	250	250	350	449 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
250-403	K	S05	250	250	350	284 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S05	250	250	350	286 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails												Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
250-403	K	S05	250	250	350	324 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S05	250	250	350	326 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S05	250	250	350	364 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S05	250	250	350	365 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S05	250	250	350	404 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S05	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S05	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S06	250	250	350	405 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S06	250	250	350	444 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S06	250	250	350	445 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
250-403	K	S06	250	250	350	447 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
250-403	K	S06	250	250	350	449 T	600	1000	450	890	35	28	-	800	890	1000	20	300	600	450	900	1200	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
250-630	K	S07	250	250	350	444 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
250-630	K	S07	250	250	350	445 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
250-630	K	S07	250	250	350	447 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-630	K	S07	250	250	350	449 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-630	K	S07	250	250	350	504 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-630	K	S07	250	250	350	505 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-630	K	S07	250	250	350	586 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-630	K	S07	250	250	350	587 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-632	K	S07	250	250	350	444 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
250-632	K	S07	250	250	350	445 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
250-632	K	S07	250	250	350	447 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-632	K	S07	250	250	350	449 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-632	K	S07	250	250	350	504 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-632	K	S07	250	250	350	505 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-632	K	S07	250	250	350	586 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
250-632	K	S07	250	250	350	587 T	700	850	550	780	40	35	-	630	780	870	20	300	550	425	850	1200	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
300-400	K	S05	300	300	400	284 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	286 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	324 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	326 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	404 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	405 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	444 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	K	S05	300	300	400	445 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S05	300	300	400	326 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S05	300	300	400	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S05	300	300	400	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S06	300	300	400	364 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S06	300	300	400	365 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S06	300	300	400	404 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S06	300	300	400	405 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-400	D	S06	300	300	400	444 T	850	850	760	760	77	28	-	670	760	850	20	260	550	500	1000	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	284 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails												Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J Ⓒ	K Ⓒ	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
300-401	K	S05	300	300	400	286 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	324 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	326 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	404 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	405 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	444 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-401	K	S05	300	300	400	445 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S05	300	300	400	284 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S05	300	300	400	286 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S05	300	300	400	324 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S05	300	300	400	326 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S05	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S05	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S06	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S06	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S06	300	300	400	404 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S06	300	300	400	405 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-402	D	S06	300	300	400	444 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	284 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	286 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	324 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	326 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	364 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	365 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	404 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	405 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	444 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-403	K	S05	300	300	400	445 T	600	800	450	730	35	28	-	620	730	800	20	260	550	450	900	1000	M24	260	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S06	300	300	400	324 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S06	300	300	400	326 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S06	300	300	400	364 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S06	300	300	400	365 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S06	300	300	400	404 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S06	300	300	400	405 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S07	300	300	400	365 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S07	300	300	400	404 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S07	300	300	400	405 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S07	300	300	400	444 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S07	300	300	400	445 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-500	K	S07	300	300	400	447 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
300-502	D	S06	300	300	400	324 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S06	300	300	400	326 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S06	300	300	400	364 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S06	300	300	400	365 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S06	300	300	400	404 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails												Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
300-502	D	S06	300	300	400	405 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S07	300	300	400	365 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S07	300	300	400	404 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S07	300	300	400	405 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S07	300	300	400	444 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S07	300	300	400	445 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-502	D	S07	300	300	400	447 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
300-505	K	S06	300	300	400	324 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S06	300	300	400	326 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S06	300	300	400	364 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S06	300	300	400	365 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S06	300	300	400	404 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S06	300	300	400	405 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S07	300	300	400	365 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S07	300	300	400	404 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S07	300	300	400	405 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S07	300	300	400	444 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S07	300	300	400	445 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	K	S07	300	300	400	447 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
300-505	K	S07	300	300	400	449 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
300-505	D	S06	300	300	400	324 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S06	300	300	400	326 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S06	300	300	400	364 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S06	300	300	400	365 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S06	300	300	400	404 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S06	300	300	400	405 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S07	300	300	400	365 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S07	300	300	400	404 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S07	300	300	400	405 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S07	300	300	400	444 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S07	300	300	400	445 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	300	280
300-505	D	S07	300	300	400	447 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
300-505	D	S07	300	300	400	449 T	550	900	400	830	35	28	-	700	830	900	20	300	600	450	900	1150	M24	300	-	-	-	35	1320	26	M24	1250	1440	550	280
350-500	K	S06	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-500	K	S06	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-500	K	S07	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-500	K	S07	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-500	K	S07	350	350	500	444 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-500	K	S07	350	350	500	445 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-500	K	S07	350	350	500	447 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-500	K	S07	350	350	500	449 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-501	K	S06	350	350	500	324 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S06	350	350	500	326 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S06	350	350	500	364 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S06	350	350	500	365 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S06	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S06	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails												Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
350-501	K	S07	350	350	500	365 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S07	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S07	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S07	350	350	500	444 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S07	350	350	500	445 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-501	K	S07	350	350	500	447 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-502	D	S06	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-502	D	S06	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-502	D	S07	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-502	D	S07	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-502	D	S07	350	350	500	444 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-502	D	S07	350	350	500	445 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-502	D	S07	350	350	500	447 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-502	D	S07	350	350	500	449 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-503	K	S06	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	K	S06	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	K	S07	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	K	S07	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	K	S07	350	350	500	444 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	K	S07	350	350	500	445 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	K	S07	350	350	500	447 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-503	K	S07	350	350	500	449 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-503	D	S06	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	D	S06	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	D	S07	350	350	500	404 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	D	S07	350	350	500	405 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	D	S07	350	350	500	444 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	D	S07	350	350	500	445 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-503	D	S07	350	350	500	447 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-503	D	S07	350	350	500	449 T	700	970	550	900	40	35	-	800	900	1000	20	300	650	600	1200	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-632	K	S07	350	350	500	444 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-632	K	S07	350	350	500	445 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-632	K	S07	350	350	500	447 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-632	K	S07	350	350	500	449 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-632	K	S07	350	350	500	504 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-632	K	S07	350	350	500	505 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-632	K	S07	350	350	500	586 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-632	K	S08	350	350	500	587 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-633	K	S07	350	350	500	444 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-633	K	S07	350	350	500	445 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	300	280
350-633	K	S07	350	350	500	447 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-633	K	S07	350	350	500	449 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-633	K	S07	350	350	500	504 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-633	K	S07	350	350	500	505 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-633	K	S07	350	350	500	586 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280
350-633	K	S08	350	350	500	587 T	700	970	550	900	40	35	-	750	900	990	20	300	650	550	1100	1400	M30	300	-	-	-	40	1475	26	M24	1410	1600	550	280

Size	Impeller type	Bearing bracket	Flange			Motor Ⓐ	Soleplate							Foundation / foundation rails											Chemical anchors			Soleplate, motor							
			DN_1	DN_2	DN_6		f_2	f_3	m_1	m_2	g_2	ø s_2	[kg]	C	D	E	F	G	H	M	J ©	K ©	s_3	Profile V		øN	L	g_1	m	øs	$øs_1$	□ B	B_1	h_3	Profile V II Ⓟ
400-632	K	S08	500	400	600	444 T	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-	40	1475	26	M24	1710	1900	300	280
400-632	K	S08	500	400	600	445 T	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-	40	1475	26	M24	1710	1900	300	280
400-632	K	S08	500	400	600	447 T	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-	40	1475	26	M24	1710	1900	550	280
400-632	K	S08	500	400	600	449 T	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-	40	1475	26	M24	1710	1900	550	280
400-632	K	S08	500	400	600	504 T	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-	40	1475	26	M24	1710	1900	550	280
400-632	K	S08	500	400	600	505 T	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-	40	1475	26	M24	1710	1900	550	280
400-632	K	S08	500	400	600	586 T	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-	40	1475	26	M24	1710	1900	550	280
400-632	K	S08	500	400	600	587 T	750	1350	600	1230	40	35	-	1050	1230	1350	30	300	850	550	1100	1800	M30	300	-	-	-	40	1475	26	M24	1710	1900	550	280
500-632	K	S08	500	500	700	444 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	300	300
500-632	K	S08	500	500	700	445 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	300	300
500-632	K	S08	500	500	700	447 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-632	K	S08	500	500	700	449 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-632	K	S08	500	500	700	504 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-632	K	S08	500	500	700	505 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-632	K	S08	500	500	700	586 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-632	K	S08	500	500	700	587 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-634	K	S08	500	500	700	444 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	300	300
500-634	K	S08	500	500	700	445 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	300	300
500-634	K	S08	500	500	700	447 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-634	K	S08	500	500	700	449 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-634	K	S08	500	500	700	504 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-634	K	S08	500	500	700	505 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-634	K	S08	500	500	700	586 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300
500-634	K	S08	500	500	700	587 T	1100	1400	830	1280	45	35	-	1100	1280	1400	30	300	850	750	1500	1800	M30	300	-	-	-	40	1975	33	M30	1900	2100	550	300

Installation type BLOC

Table 15: Installation type BLOC [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Foundation rail	Pump											Flanged spacer		Pump foot						Pump foot position	Motor	[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	$øp_2$	a_1	$øp_1$	g_1	m_1	m_2	n_1	n_2	s_1	i	k_d Ⓑ		
50-215	F	B01	21	65	50	182 T	101	97	65	20	304,0	593	170	222	690	135	150	-	302	80	14	125	95	320	250	16	47,5	221	119	Ⓝ
50-215	F	B01	21	65	50	184 T	101	97	65	20	304,0	618	170	222	715	135	150	-	302	80	14	125	95	320	250	16	47,5	221	126	Ⓝ
50-215	F	B01	21	65	50	213 T	101	97	65	20	304,0	672	170	222	769	135	150	-	302	80	14	125	95	320	250	16	47,5	262	139	Ⓝ
50-215	F	B01	21	65	50	215 T	101	97	65	20	304,0	700	170	222	797	135	150	-	302	80	14	125	95	320	250	16	47,5	262	154	Ⓝ
50-215	F	B01	21	65	50	254 T	102	97	65	20	304,0	769	170	222	866	135	150	-	302	80	14	125	95	320	250	16	47,5	315	194	Ⓝ
50-215	F	B01	21	65	50	256 T	102	97	65	20	304,0	815	170	222	912	135	150	-	302	80	14	125	95	320	250	16	47,5	315	214	Ⓝ
50-216	F	B01	21	65	50	182 T	101	97	65	20	304,0	593	170	222	690	135	150	-	302	80	14	125	95	320	250	16	47,5	221	119	Ⓝ
50-216	F	B01	21	65	50	184 T	101	97	65	20	304,0	618	170	222	715	135	150	-	302	80	14	125	95	320	250	16	47,5	221	126	Ⓝ
50-216	F	B01	21	65	50	213 T	101	97	65	20	304,0	672	170	222	769	135	150	-	302	80	14	125	95	320	250	16	47,5	262	139	Ⓝ
50-216	F	B01	21	65	50	215 T	101	97	65	20	304,0	700	170	222	797	135	150	-	302	80	14	125	95	320	250	16	47,5	262	154	Ⓝ
50-216	F	B01	21	65	50	254 T	102	97	65	20	304,0	769	170	222	866	135	150	-	302	80	14	125	95	320	250	16	47,5	315	194	Ⓝ
50-216	F	B01	21	65	50	256 T	102	97	65	20	304,0	815	170	222	912	135	150	-	302	80	14	125	95	320	250	16	47,5	315	214	Ⓝ
50-250	K	B01	21	65	50	182 T	101	97	65	20	230,0	519	170	222	616	155	155	-	302	80	14	125	95	320	250	15	47,5	221	113	Ⓝ
50-250	K	B01	21	65	50	184 T	101	97	65	20	230,0	544	170	222	641	155	155	-	302	80	14	125	95	320	250	15	47,5	221	120	Ⓝ
50-250	K	B01	21	65	50	213 T	101	97	65	20	230,0	598	170	222	695	155	155	-	302	80	14	125	95	320	250	15	47,5	262	133	Ⓝ
50-250	K	B01	21	65	50	215 T	101	97	65	20	230,0	626	170	222	723	155	155	-	302	80	14	125	95	320	250	15	47,5	262	148	Ⓝ
50-251	K	B02	21	65	50	182 T	101	97	65	20	230,0	519	170	222	616	155	155	-	302	80	14	125	95	320	250	15	47,5	221	118	Ⓝ
50-251	K	B02	21	65	50	184 T	101	97	65	20	230,0	544	170	222	641	155	155	-	302	80	14	125	95	320	250	15	47,5	221	125	Ⓝ
50-251	K	B02	21	65	50	213 T	101	97	65	20	230,0	598	170	222	695	155	155	-	302	80	14	125	95	320	250	15	47,5	262	138	Ⓝ
50-251	K	B02	21	65	50	215 T	101	97	65	20	230,0	626	170	222	723	155	155	-	302	80	14	125	95	320	250	15	47,5	262	153	Ⓝ
65-215	F	B01	21	80	65	182 T	101	97	65	20	323,0	612	225	237	709	130	155	-	362	80	14	125	95	320	250	16	47,5	221	124	Ⓝ
65-215	F	B01	21	80	65	184 T	101	97	65	20	323,0	637	225	237	734	130	155	-	362	80	14	125	95	320	250	16	47,5	221	131	Ⓝ
65-215	F	B01	21	80	65	213 T	101	97	65	20	323,0	691	225	237	788	130	155	-	362	80	14	125	95	320	250	16	47,5	262	144	Ⓝ
65-215	F	B01	21	80	65	215 T	101	97	65	20	323,0	719	225	237	816	130	155	-	362	80	14	125	95	320	250	16	47,5	262	159	Ⓝ
65-215	F	B01	21	80	65	254 T	102	97	65	20	323,0	788	225	237	885	130	155	-	362	80	14	125	95	320	250	16	47,5	315	199	Ⓝ
65-215	F	B01	21	80	65	256 T	102	97	65	20	323,0	834	225	237	931	130	155	-	362	80	14	125	95	320	250	16	47,5	315	219	Ⓝ
65-216	E	B02	21	80	65	182 T	101	97	65	22	352,0	641	225	237	738	155	190	-	362	80	14	125	95	320	250	16	50,2	221	133	Ⓝ
65-216	E	B02	21	80	65	184 T	101	97	65	22	352,0	666	225	237	763	155	190	-	362	80	14	125	95	320	250	16	50,2	221	140	Ⓝ
65-216	E	B02	21	80	65	213 T	101	97	65	22	352,0	720	225	237	817	155	190	-	362	80	14	125	95	320	250	16	50,2	262	153	Ⓝ
65-216	E	B02	21	80	65	215 T	101	97	65	22	352,0	748	225	237	845	155	190	-	362	80	14	125	95	320	250	16	50,2	262	168	Ⓝ
65-216	E	B02	21	80	65	254 T	109	97	65	22	352,0	817	225	237	914	155	190	-	362	80	14	125	95	320	250	16	50,2	315	208	Ⓝ
65-216	E	B02	21	80	65	256 T	109	97	65	22	352,0	863	225	237	960	155	190	-	362	80	14	125	95	320	250	16	50,2	315	228	Ⓝ
65-217	F	B01	21	80	65	182 T	101	97	65	20	301,0	590	225	237	687	130	155	-	362	80	14	125	95	320	250	16	47,5	221	118	Ⓝ
65-217	F	B01	21	80	65	184 T	101	97	65	20	301,0	615	225	237	712	130	155	-	362	80	14	125	95	320	250	16	47,5	221	125	Ⓝ
65-217	F	B01	21	80	65	213 T	101	97	65	20	301,0	669	225	237	766	130	155	-	362	80	14	125	95	320	250	16	47,5	262	138	Ⓝ
65-217	F	B01	21	80	65	215 T	101	97	65	20	301,0	697	225	237	794	130	155	-	362	80	14	125	95	320	250	16	47,5	262	153	Ⓝ
65-217	F	B01	21	80	65	254 T	102	97	65	20	301,0	766	225	237	863	130	155	-	362	80	14	125	95	320	250	16	47,5	315	193	Ⓝ
65-217	F	B01	21	80	65	256 T	102	97	65	20	301,0	812	225	237	909	130	155	-	362	80	14	125	95	320	250	16	47,5	315	213	Ⓝ
65-250	F	B01	21	80	65	182 T	101	97	65	20	252,0	289	225	240	289	160	200	-	302	80	14	125	95	320	250	15	47,5	221	39	Ⓝ
65-250	F	B01	21	80	65	184 T	101	97	65	20	252,0	314	225	240	314	160	200	-	302	80	14	125	95	320	250	15	47,5	221	46	Ⓝ
65-250	F	B01	21	80	65	213 T	101	97	65	20	252,0	368	225	240	368	160	200	-	302	80	14	125	95	320	250	15	47,5	262	59	Ⓝ

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Foundation rail	Pump											Flanged spacer		Pump foot						Pump foot position-	Motor	[kg] Ⓓ	Comment
				DN_1	DN_2			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	$øp_2$	a_1	$øp_1$	g_1	m_1	m_2	n_1	n_2	s_1	i	k_d Ⓑ		
65-250	F	B01	21	80	65	215 T	101	97	65	20	252,0	396	225	240	396	160	200	-	302	80	14	125	95	320	250	15	47,5	262	74	Ⓝ
65-250	K	B01	21	80	65	182 T	101	97	65	20	252,0	541	225	237	638	160	200	-	302	80	14	125	95	320	250	15	47,5	221	125	Ⓝ
65-250	K	B01	21	80	65	184 T	101	97	65	20	252,0	566	225	237	663	160	200	-	302	80	14	125	95	320	250	15	47,5	221	132	Ⓝ
65-250	K	B01	21	80	65	213 T	101	97	65	20	252,0	620	225	237	717	160	200	-	302	80	14	125	95	320	250	15	47,5	262	145	Ⓝ
65-250	K	B01	21	80	65	215 T	101	97	65	20	252,0	648	225	237	745	160	200	-	302	80	14	125	95	320	250	15	47,5	262	160	Ⓝ
80-216	F	B01	21	100	80	182 T	101	123	65	22	336,0	625	225	247	748	130	165	-	377	120	14	125	95	320	250	16	47,5	221	122	Ⓝ
80-216	F	B01	21	100	80	184 T	101	123	65	22	336,0	650	225	247	773	130	165	-	377	120	14	125	95	320	250	16	47,5	221	129	Ⓝ
80-216	F	B01	21	100	80	213 T	101	123	65	22	336,0	704	225	247	827	130	165	-	377	120	14	125	95	320	250	16	47,5	262	142	Ⓝ
80-216	F	B01	21	100	80	215 T	101	123	65	22	336,0	732	225	247	855	130	165	-	377	120	14	125	95	320	250	16	47,5	262	157	Ⓝ
80-216	F	B01	21	100	80	254 T	102	123	65	22	336,0	801	225	247	924	130	165	-	377	120	14	125	95	320	250	16	47,5	315	197	Ⓝ
80-216	F	B01	21	100	80	256 T	102	123	65	22	336,0	847	225	247	970	130	165	-	377	120	14	125	95	320	250	16	47,5	315	217	Ⓝ
80-216	F	B01	21	100	80	284 T	102	123	65	22	358,5	972	225	247	1095	130	165	-	377	120	14	125	95	320	250	16	47,5	401	256	Ⓝ
80-216	F	B01	21	100	80	286 T	102	123	65	22	358,5	972	225	247	1095	130	165	-	377	120	14	125	95	320	250	16	47,5	401	287	Ⓝ
80-216	E	B02	21	100	80	182 T	101	123	65	22	359,5	648	225	247	771	165	200	-	377	120	14	125	95	320	250	14	47,5	221	144	Ⓝ
80-216	E	B02	21	100	80	184 T	101	123	65	22	359,5	673	225	247	796	165	200	-	377	120	14	125	95	320	250	14	47,5	221	151	Ⓝ
80-216	E	B02	21	100	80	213 T	101	123	65	22	359,5	728	225	247	851	165	200	-	377	120	14	125	95	320	250	14	47,5	262	164	Ⓝ
80-216	E	B02	21	100	80	215 T	101	123	65	22	359,5	756	225	247	879	165	200	-	377	120	14	125	95	320	250	14	47,5	262	179	Ⓝ
80-216	E	B02	21	100	80	254 T	109	123	65	22	359,5	824	225	247	947	165	200	-	377	120	14	125	95	320	250	14	47,5	315	219	Ⓝ
80-216	E	B02	21	100	80	256 T	109	123	65	22	359,5	870	225	247	993	165	200	-	377	120	14	125	95	320	250	14	47,5	315	239	Ⓝ
80-217	F	B01	21	100	80	182 T	101	123	65	22	308,0	597	225	247	720	130	165	-	377	120	14	125	95	320	250	16	40,0	221	122	Ⓝ
80-217	F	B01	21	100	80	184 T	101	123	65	22	308,0	622	225	247	745	130	165	-	377	120	14	125	95	320	250	16	40,0	221	129	Ⓝ
80-217	F	B01	21	100	80	213 T	101	123	65	22	308,0	676	225	247	799	130	165	-	377	120	14	125	95	320	250	16	40,0	262	142	Ⓝ
80-217	F	B01	21	100	80	215 T	101	123	65	22	308,0	704	225	247	827	130	165	-	377	120	14	125	95	320	250	16	40,0	262	157	Ⓝ
80-217	F	B01	21	100	80	254 T	102	123	65	22	308,0	773	225	247	896	130	165	-	377	120	14	125	95	320	250	16	40,0	315	197	Ⓝ
80-217	F	B01	21	100	80	256 T	102	123	65	22	308,0	819	225	247	942	130	165	-	377	120	14	125	95	320	250	16	40,0	315	217	Ⓝ
80-217	F	B01	21	100	80	284 T	102	123	65	22	330,5	944	225	247	1067	130	165	-	377	120	14	125	95	320	250	16	40,0	401	256	Ⓝ
80-250	K	B01	21	100	80	182 T	101	107	65	20	254,0	543	225	247	650	160	175	-	362	120	14	125	95	320	250	15	47,5	221	129	Ⓝ
80-250	K	B01	21	100	80	184 T	101	107	65	20	254,0	568	225	247	675	160	175	-	362	120	14	125	95	320	250	15	47,5	221	136	Ⓝ
80-250	K	B01	21	100	80	213 T	101	107	65	20	254,0	622	225	247	729	160	175	-	362	120	14	125	95	320	250	15	47,5	262	149	Ⓝ
80-250	K	B01	21	100	80	215 T	101	107	65	20	254,0	650	225	247	757	160	175	-	362	120	14	125	95	320	250	15	47,5	262	164	Ⓝ
80-252	F	B01	21	100	80	182 T	101	107	65	20	254,0	543	225	247	650	160	175	-	362	120	14	125	95	320	250	15	47,5	221	129	Ⓝ
80-252	F	B01	21	100	80	184 T	101	107	65	20	254,0	568	225	247	675	160	175	-	362	120	14	125	95	320	250	15	47,5	221	136	Ⓝ
80-252	F	B01	21	100	80	213 T	101	107	65	20	254,0	622	225	247	729	160	175	-	362	120	14	125	95	320	250	15	47,5	262	149	Ⓝ
80-252	F	B01	21	100	80	215 T	101	107	65	20	254,0	650	225	247	757	160	175	-	362	120	14	125	95	320	250	15	47,5	262	164	Ⓝ
80-253	F	B02	21	100	80	182 T	101	121	65	20	335,0	624	225	247	745	160	175	-	362	120	14	125	95	320	250	15	47,5	221	137	Ⓝ
80-253	F	B02	21	100	80	184 T	101	121	65	20	335,0	649	225	247	770	160	175	-	362	120	14	125	95	320	250	15	47,5	221	144	Ⓝ
80-253	F	B02	21	100	80	213 T	101	121	65	20	335,0	703	225	247	824	160	175	-	362	120	14	125	95	320	250	15	47,5	262	157	Ⓝ
80-253	F	B02	21	100	80	215 T	101	121	65	20	335,0	731	225	247	852	160	175	-	362	120	14	125	95	320	250	15	47,5	262	172	Ⓝ
80-253	F	B02	21	100	80	254 T	102	121	65	20	335,0	800	225	247	921	160	175	-	362	120	14	125	95	320	250	15	47,5	315	212	Ⓝ
80-253	F	B02	21	100	80	256 T	102	121	65	20	335,0	846	225	247	967	160	175	-	362	120	14	125	95	320	250	15	47,5	315	232	Ⓝ
80-253	F	B02	21	100	80	284 T	102	121	65	20	335,0	949	225	247	1070	160	175	-	362	120	14	125	95	320	250	15	47,5	401	271	Ⓝ
80-253	F	B02	21	100	80	286 T	102	121	65	20	335,0	949	225	247	1070	160	175	-	362	120	14	125	95	320	250	15	47,5	401	302	Ⓝ
80-253	E	B02	21	100	80	182 T	101	121	65	20	335,0	624	225	247	745	160	175	-	362	120	14	125	95	320	250	15	47,5	221	146	Ⓝ
80-253	E	B02	21	100	80	184 T	101	121	65	20	335,0	649	225	247	770	160	175	-	362	120	14	125	95	320	250	15	47,5	221	153	Ⓝ

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Foundation rail	Pump											Flanged spacer		Pump foot						Pump foot position	Motor	[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	$øp_2$	a_1	$øp_1$	g_1	m_1	m_2	n_1	n_2	s_1	i	k_d Ⓑ		
80-253	E	B02	21	100	80	213 T	101	121	65	20	335,0	703	225	247	824	160	175	-	362	120	14	125	95	320	250	15	47,5	262	166	Ⓝ
80-253	E	B02	21	100	80	215 T	101	121	65	20	335,0	731	225	247	852	160	175	-	362	120	14	125	95	320	250	15	47,5	262	181	Ⓝ
80-253	E	B02	21	100	80	254 T	102	121	65	20	335,0	800	225	247	921	160	175	-	362	120	14	125	95	320	250	15	47,5	315	221	Ⓝ
80-253	E	B02	21	100	80	256 T	102	121	65	20	335,0	846	225	247	967	160	175	-	362	120	14	125	95	320	250	15	47,5	315	241	Ⓝ
80-253	E	B02	21	100	80	284 T	102	121	65	20	335,0	949	225	247	1070	160	175	-	362	120	14	125	95	320	250	15	47,5	401	280	Ⓝ
80-253	E	B02	21	100	80	286 T	102	121	65	20	335,0	949	225	247	1070	160	175	-	362	120	14	125	95	320	250	15	47,5	401	311	Ⓝ
80-315	K	B03	21	100	80	213 T	104	107	80	20	346,0	714	225	247	821	180	180	-	362	120	18	160	120	400	315	19	60,0	262	178	Ⓝ
80-315	K	B03	21	100	80	215 T	104	107	80	20	346,0	742	225	247	849	180	180	-	362	120	18	160	120	400	315	19	60,0	262	193	Ⓝ
80-315	K	B03	21	100	80	254 T	105	107	80	20	346,0	811	225	247	918	180	180	-	362	120	18	160	120	400	315	19	60,0	315	233	Ⓝ
80-315	K	B03	21	100	80	256 T	105	107	80	20	346,0	857	225	247	964	180	180	-	362	120	18	160	120	400	315	19	60,0	315	253	Ⓝ
80-315	K	B03	21	100	80	284 T	107	107	80	20	346,0	960	225	247	1067	180	180	-	362	120	18	160	120	400	315	19	60,0	401	292	Ⓝ
80-315	K	B03	21	100	80	286 T	107	107	80	20	346,0	960	225	247	1067	180	180	-	362	120	18	160	120	400	315	19	60,0	401	323	Ⓝ
80-315	D	B03	21	100	80	213 T	106.01	187	90	22	345	713	280	257	900	180	205	-	442	120	80	220	150	500	400	19	103	262	239	Ⓝ
80-315	D	B03	21	100	80	215 T	106.01	187	90	22	345	741,4	280	257	928	180	205	-	442	120	80	220	150	500	400	19	103	262	254	Ⓝ
80-315	D	B03	21	100	80	254 T	106.01	187	90	22	345	809,7	280	257	997	180	205	-	442	120	80	220	150	500	400	19	103	315	294	Ⓝ
80-315	D	B03	21	100	80	256 T	106.01	187	90	22	345	855,7	280	257	1043	180	205	-	442	120	80	220	150	500	400	19	103	315	314	Ⓝ
80-315	D	B03	21	100	80	284 T	106.01	187	90	22	345	958,7	280	257	1146	180	205	-	442	120	80	220	150	500	400	19	103	401	353	Ⓝ
80-316	D	B03	21	125	80	213 T	106.01	207	70	22	345,0	713	280	297	920	195	225	-	462	120	35	220	150	500	400	19	123	262	239	Ⓝ
80-316	D	B03	21	125	80	215 T	106.01	207	70	22	345,0	741	280	297	948	195	225	-	462	120	35	220	150	500	400	19	123	262	254	Ⓝ
80-316	D	B03	21	125	80	254 T	106.01	207	70	22	345,0	810	280	297	1017	195	225	-	462	120	35	220	150	500	400	19	123	315	294	Ⓝ
80-316	D	B03	21	125	80	256 T	106.01	207	70	22	345,0	856	280	297	1063	195	225	-	462	120	35	220	150	500	400	19	123	315	314	Ⓝ
80-316	D	B03	21	125	80	284 T	106.01	207	70	22	345,0	959	280	297	1166	195	225	-	462	120	35	220	150	500	400	19	123	401	353	Ⓝ
80-317	F	B03	21	100	80	213 T	104	107	80	20	346,0	714	225	247	821	180	180	-	362	120	18	160	120	400	315	19	60,0	262	178	Ⓝ
80-317	F	B03	21	100	80	215 T	104	107	80	20	346,0	742	225	247	849	180	180	-	362	120	18	160	120	400	315	19	60,0	262	193	Ⓝ
80-317	F	B03	21	100	80	254 T	105	107	80	20	346,0	811	225	247	918	180	180	-	362	120	18	160	120	400	315	19	60,0	315	233	Ⓝ
80-317	F	B03	21	100	80	256 T	105	107	80	20	346,0	857	225	247	964	180	180	-	362	120	18	160	120	400	315	19	60,0	315	253	Ⓝ
80-317	F	B03	21	100	80	284 T	107	107	80	20	346,0	960	225	247	1067	180	180	-	362	120	18	160	120	400	315	19	60,0	401	292	Ⓝ
80-317	F	B03	21	100	80	286 T	107	107	80	20	346,0	960	225	247	1067	180	180	-	362	120	18	160	120	400	315	19	60,0	401	323	Ⓝ
80-317	D	B03	21	100	80	213 T	106.01	172	90	22	351	719	280	257	891	181	201	-	442	120	18	220	150	500	400	19	125	262	241	Ⓝ
80-317	D	B03	21	100	80	215 T	106.01	172	90	22	351	747	280	257	919	181	201	-	442	120	18	220	150	500	400	19	125	262	256	Ⓝ
80-317	D	B03	21	100	80	254 T	106.01	172	90	22	351	816	280	257	988	181	201	-	442	120	18	220	150	500	400	19	125	315	296	Ⓝ
100-215	F	B01	21	100	100	182 T	103	137	80	27	345,0	634	225	277	771	205	240	100	392	120	18	160	120	400	315	20	60	221	135	-
100-215	F	B01	21	100	100	184 T	103	137	80	27	345,0	659	225	277	796	205	240	100	392	120	18	160	120	400	315	20	60	221	142	-
100-215	F	B01	21	100	100	213 T	103	137	80	27	345,0	713	225	277	850	205	240	100	392	120	18	160	120	400	315	20	60	262	155	-
100-215	F	B01	21	100	100	215 T	103	137	80	27	345,0	741	225	277	878	205	240	100	392	120	18	160	120	400	315	20	60	262	170	-
100-251	F	B02	21	100	100	213 T	104	137	80	27	332,0	700	225	277	837	180	280	118	392	120	18	160	120	400	315	19	60	262	160	-
100-251	F	B02	21	100	100	215 T	104	137	80	27	332,0	728	225	277	865	180	280	118	392	120	18	160	120	400	315	19	60	262	175	-
100-251	F	B02	21	100	100	254 T	104	137	80	27	332,0	797	225	277	934	180	280	118	392	120	18	160	120	400	315	19	60	315	215	-
100-251	F	B02	21	100	100	256 T	104	137	80	27	332,0	843	225	277	980	180	280	118	392	120	18	160	120	400	315	19	60	315	235	-
100-251	F	B02	21	100	100	284 T	104	137	80	27	332,0	946	225	277	1083	180	280	118	392	120	18	160	120	400	315	19	60	401	274	-
100-251	F	B02	21	100	100	286 T	104	137	80	27	332,0	946	225	277	1083	180	280	118	392	120	18	160	120	400	315	19	60	401	305	-
100-252	F	B01	21	100	100	213 T	104	137	80	27	309,0	677	225	277	814	180	280	118	392	120	18	160	120	400	315	19	60	262	155	-
100-252	F	B01	21	100	100	215 T	104	137	80	27	309,0	705	225	277	842	180	280	118	392	120	18	160	120	400	315	19	60	262	170	-
100-253	F	B02	21	100	100	213 T	104	137	80	27	332,0	700	225	277	837	180	280	118	392	120	18	160	120	400	315	19	60	262	160	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Foundation rail	Pump											Flanged spacer		Pump foot						Pump foot position	Motor	[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	$øp_2$	a_1	$øp_1$	g_1	m_1	m_2	n_1	n_2	s_1	i	k_d Ⓑ		
100-253	F	B02	21	100	100	215 T	104	137	80	27	332,0	728	225	277	865	180	280	118	392	120	18	160	120	400	315	19	60	262	175	-
100-253	F	B02	21	100	100	254 T	104	137	80	27	332,0	797	225	277	934	180	280	118	392	120	18	160	120	400	315	19	60	315	215	-
100-253	F	B02	21	100	100	256 T	104	137	80	27	332,0	843	225	277	980	180	280	118	392	120	18	160	120	400	315	19	60	315	235	-
100-253	F	B02	21	100	100	284 T	104	137	80	27	332,0	946	225	277	1083	180	280	118	392	120	18	160	120	400	315	19	60	401	274	-
100-253	F	B02	21	100	100	286 T	104	137	80	27	332,0	946	225	277	1083	180	280	118	392	120	18	160	120	400	315	19	60	401	305	-
100-253	K	B02	21	100	100	213 T	104	137	80	27	335,0	703	225	277	840	205	282	90	392	120	18	160	120	400	315	20	60	262	176	-
100-253	K	B02	21	100	100	215 T	104	137	80	27	335,0	731	225	277	868	205	282	90	392	120	18	160	120	400	315	20	60	262	191	-
100-253	K	B02	21	100	100	254 T	104	137	80	27	335,0	800	225	277	937	205	282	90	392	120	18	160	120	400	315	20	60	315	231	-
100-253	K	B02	21	100	100	256 T	104	137	80	27	335,0	846	225	277	983	205	282	90	392	120	18	160	120	400	315	20	60	315	251	-
100-253	K	B02	21	100	100	284 T	104	137	80	27	335,0	949	225	277	1086	205	282	90	392	120	18	160	120	400	315	20	60	401	290	-
100-253	K	B02	21	100	100	286 T	104	137	80	27	335,0	949	225	277	1086	205	282	90	392	120	18	160	120	400	315	20	60	401	321	-
100-253	D	B02	21	150	100	213 T	104	202	70	27	332,0	700	280	380	902	205	330	100	457	150	35	250	150	500	400	19	116	262	239	-
100-253	D	B02	21	150	100	215 T	104	202	70	27	332,0	728	280	380	930	205	330	100	457	150	35	250	150	500	400	19	116	262	254	-
100-253	D	B02	21	150	100	254 T	104	202	70	27	332,0	797	280	380	999	205	330	100	457	150	35	250	150	500	400	19	116	315	294	-
100-253	D	B02	21	150	100	256 T	104	202	70	27	332,0	843	280	380	1045	205	330	100	457	150	35	250	150	500	400	19	116	315	314	-
100-253	D	B02	21	150	100	284 T	104	202	70	27	332,0	946	280	380	1148	205	330	100	457	150	35	250	150	500	400	19	116	401	353	-
100-253	D	B02	21	100	100	286 T	104	205	70	27	332,0	614	225	277	614	205	282	90	392	120	18	160	120	400	315	20	60	401	204	-
100-254	F	B01	21	100	100	213 T	104	137	80	27	309,0	677	225	277	814	180	280	118	392	120	18	160	120	400	315	19	60	262	155	-
100-254	F	B01	21	100	100	215 T	104	137	80	27	309,0	705	225	277	842	180	280	118	392	120	18	160	120	400	315	19	60	262	170	-
100-254	K	B01	21	100	100	213 T	104	137	80	27	309,0	677	225	277	814	180	280	118	392	120	18	160	120	400	315	19	60	262	155	-
100-254	K	B01	21	100	100	215 T	104	137	80	27	309,0	705	225	277	842	180	280	118	392	120	18	160	120	400	315	19	60	262	170	-
100-316	F	B03	21	150	100	213 T	105	140	80	25	336,0	704	280	315	844	200	290	90	418	150	18	175	120	400	315	19	60	262	223	-
100-316	F	B03	21	150	100	215 T	105	140	80	25	336,0	732	280	315	872	200	290	90	418	150	18	175	120	400	315	19	60	262	238	-
100-316	F	B03	21	150	100	254 T	105	140	80	25	336,0	801	280	315	941	200	290	90	418	150	18	175	120	400	315	19	60	315	278	-
100-316	F	B03	21	150	100	256 T	105	140	80	25	336,0	847	280	315	987	200	290	90	418	150	18	175	120	400	315	19	60	315	289	-
100-316	F	B03	21	150	100	284 T	107	140	80	25	336,0	950	280	315	1090	200	290	90	418	150	18	175	120	400	315	19	60	401	337	-
100-316	F	B03	21	150	100	286 T	107	140	80	25	336,0	950	280	315	1090	200	290	90	418	150	18	175	120	400	315	19	60	401	368	-
100-316	F	B03	21	150	100	324 T	107	140	80	25	356,0	1035	280	315	1175	200	290	90	418	150	18	175	120	400	315	19	60	449,6	421	-
100-316	F	B03	21	150	100	326 T	107	140	80	25	356,0	1035	280	315	1175	200	290	90	418	150	18	175	120	400	315	19	60	449,6	437	-
100-316	K	B03	21	150	100	213 T	105	140	80	25	336,0	704	280	315	844	200	290	90	418	150	18	175	120	400	315	19	60	262	223	-
100-316	K	B03	21	150	100	215 T	105	140	80	25	336,0	732	280	315	872	200	290	90	418	150	18	175	120	400	315	19	60	262	238	-
100-316	K	B03	21	150	100	254 T	105	140	80	25	336,0	801	280	315	941	200	290	90	418	150	18	175	120	400	315	19	60	315	278	-
100-316	K	B03	21	150	100	256 T	105	140	80	25	336,0	847	280	315	987	200	290	90	418	150	18	175	120	400	315	19	60	315	289	-
100-316	K	B03	21	150	100	284 T	107	140	80	25	336,0	950	280	315	1090	200	290	90	418	150	18	175	120	400	315	19	60	401	337	-
100-316	K	B03	21	150	100	286 T	107	140	80	25	333,0	950	280	315	1090	200	290	90	418	150	18	175	120	400	315	19	60	401	368	-
100-316	K	B03	21	150	100	324 T	107	140	80	25	356,0	1035	280	315	1175	200	290	90	418	150	18	175	120	400	315	19	60	449,6	421	-
100-316	K	B03	21	150	100	326 T	107	140	80	25	356,0	1035	280	315	1175	200	290	90	418	150	18	175	120	400	315	19	60	449,6	437	-
100-316	D	B03	21	150	100	254 T	106.01	237	70	27	354,0	819	280	337	1056	210	305	100	492	150	35	200	150	500	400	19	89	315	320	-
100-316	D	B03	21	150	100	256 T	106.01	237	70	27	354,0	865	280	337	1102	210	305	100	492	150	35	200	150	500	400	19	89	315	340	-
100-316	D	B03	21	150	100	284 T	106.01	237	70	27	374,0	988	280	337	1225	210	305	100	492	150	35	200	150	500	400	19	89	401	379	-
100-316	D	B03	21	150	100	286 T	106.01	237	70	27	374,0	988	280	337	1225	210	305	100	492	150	35	200	150	500	400	19	89	401	410	-
150-253	D	B02	21	150	150	215 T	106.01	163	150	29	377,5	774	280	397	937	219	340	120	418	150	25	220	150	500	400	19	73	262	250	-
150-253	D	B02	21	150	150	254 T	106.01	163	150	29	377,5	842	280	397	1005	219	340	120	418	150	25	220	150	500	400	19	73	315	290	-
150-253	D	B02	21	150	150	256 T	106.01	163	150	29	377,5	888	280	397	1051	219	340	120	418	150	25	220	150	500	400	19	73	315	310	-
150-315	F	B03	21	150	150	213 T	106.01	163	100	29	393,0	761	280	397	924	250	345	118	418	150	18	200	150	500	400	19	75	262	226	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Foundation rail	Pump											Flanged spacer		Pump foot						Pump foot position	Motor	[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	$øp_2$	a_1	$øp_1$	g_1	m_1	m_2	n_1	n_2	s_1	i	k_d Ⓑ		
150-315	F	B03	21	150	150	215 T	106.01	163	100	29	393,0	789	280	397	952	250	345	118	418	150	18	200	150	500	400	19	75	262	241	-
150-315	F	B03	21	150	150	254 T	106.01	163	100	29	393,0	858	280	397	1021	250	345	118	418	150	18	200	150	500	400	19	75	315	281	-
150-315	F	B03	21	150	150	256 T	106.01	163	100	29	393,0	904	280	397	1067	250	345	118	418	150	18	200	150	500	400	19	75	315	301	-
150-315	F	B03	21	150	150	284 T	108.01	163	100	29	393,0	1007	280	397	1170	250	345	118	418	150	18	200	150	500	400	19	75	401	340	-
150-315	F	B03	21	150	150	286 T	108.01	163	100	29	393,0	1007	280	397	1170	250	345	118	418	150	18	200	150	500	400	19	75	401	371	-
150-315	F	B03	21	150	150	324 T	108.01	163	100	29	413,0	1092	280	397	1255	250	345	118	418	150	18	200	150	500	400	19	75	449,6	424	-
150-315	F	B03	21	150	150	326 T	108.01	163	100	29	413,0	1092	280	397	1255	250	345	118	418	150	18	200	150	500	400	19	75	449,6	440	-
150-315	K	B03	21	150	150	213 T	106.01	163	100	29	393,0	761	280	397	924	250	345	118	418	150	18	200	150	500	400	19	75	262	226	-
150-315	K	B03	21	150	150	215 T	106.01	163	100	29	393,0	789	280	397	952	250	345	118	418	150	18	200	150	500	400	19	75	262	241	-
150-315	K	B03	21	150	150	254 T	106.01	163	100	29	393,0	858	280	397	1021	250	345	118	418	150	18	200	150	500	400	19	75	315	281	-
150-315	K	B03	21	150	150	256 T	106.01	163	100	29	393,0	904	280	397	1067	250	345	118	418	150	18	200	150	500	400	19	75	315	301	-
150-315	K	B03	21	150	150	284 T	108.01	163	100	29	393,0	1007	280	397	1170	250	345	118	418	150	18	200	150	500	400	19	75	401	340	-
150-315	K	B03	21	150	150	286 T	108.01	163	100	29	393,0	1007	280	397	1170	250	345	118	418	150	18	200	150	500	400	19	75	401	371	-
150-315	K	B03	21	150	150	324 T	108.01	163	100	29	413,0	1092	280	397	1255	250	345	118	418	150	18	200	150	500	400	19	75	449,6	424	-
150-315	K	B03	21	150	150	326 T	108.01	163	100	29	413,0	1092	280	397	1255	250	345	118	418	150	18	200	150	500	400	19	75	449,6	440	-
150-315	D	B03	21	150	150	213 T	106.01	217	150	29	369,0	737	315	397	954	250	385	120	472	150	22	200	150	500	400	19	75	262	307	-
150-315	D	B03	21	150	150	215 T	106.01	217	150	29	369,0	765	315	397	982	250	385	120	472	150	22	200	150	500	400	19	75	262	322	-
150-315	D	B03	21	150	150	254 T	106.01	217	150	29	369,0	834	315	397	1051	250	385	120	472	150	22	200	150	500	400	19	75	315	362	-
150-315	D	B03	21	150	150	256 T	106.01	217	150	29	369,0	880	315	397	1097	250	385	120	472	150	22	200	150	500	400	19	75	315	382	-
150-315	D	B03	21	150	150	284 T	106.01	217	150	29	369,0	983	315	397	1200	250	385	120	472	150	22	200	150	500	400	19	75	401	421	-
150-315	D	B03	21	150	150	286 T	106.01	217	150	29	369,0	983	315	397	1200	250	385	120	472	150	22	200	150	500	400	19	75	401	452	-
150-317	K	B03	21	150	150	213 T	106.01	97	100	29	369,0	737	280	367	834	250	350	100	352	150	18	200	150	500	400	20	75	262	250	-
150-317	K	B03	21	150	150	215 T	106.01	97	100	29	369,0	765	280	367	862	250	350	100	352	150	18	200	150	500	400	20	75	262	265	-
150-317	K	B03	21	150	150	254 T	106.01	97	100	29	369,0	834	280	367	931	250	350	100	352	150	18	200	150	500	400	20	75	315	305	-
150-317	K	B03	21	150	150	256 T	106.01	97	100	29	369,0	880	280	367	977	250	350	100	352	150	18	200	150	500	400	20	75	315	325	-
150-317	K	B03	21	150	150	284 T	108.01	97	100	29	369,0	983	280	367	1080	250	350	100	352	150	18	200	150	500	400	20	75	401	364	-
150-317	K	B03	21	150	150	286 T	108.01	97	100	29	369,0	983	280	367	1080	250	350	100	352	150	18	200	150	500	400	20	75	401	395	-
150-317	K	B03	21	150	150	324 T	108.01	97	100	29	389,0	1068	280	367	1165	250	350	100	352	150	18	200	150	500	400	20	75	449,6	448	-
150-317	K	B03	21	150	150	326 T	108.01	97	100	29	389,0	1068	280	367	1165	250	350	100	352	150	18	200	150	500	400	20	75	449,6	464	-
150-317	D-max	B03	21	200	150	213 T	106.01	97	100	29	369,0	737	280	367	834	250	350	100	449	200	18	200	150	500	400	20	75	262	250	-
150-317	D-max	B03	21	200	150	215 T	106.01	97	100	29	369,0	765	280	367	862	250	350	100	449	200	18	200	150	500	400	20	75	262	265	-
150-317	D-max	B03	21	200	150	254 T	106.01	97	100	29	369,0	834	280	367	931	250	350	100	449	200	18	200	150	500	400	20	75	315	305	-
150-317	D-max	B03	21	200	150	256 T	106.01	97	100	29	369,0	880	280	367	977	250	350	100	449	200	18	200	150	500	400	20	75	315	325	-
150-317	D-max	B03	21	200	150	284 T	108.01	97	100	29	369,0	983	280	367	1080	250	350	100	449	200	18	200	150	500	400	20	75	401	364	-
150-317	D-max	B03	21	200	150	286 T	108.01	97	100	29	369,0	983	280	367	1080	250	350	100	449	200	18	200	150	500	400	20	75	401	395	-
150-317	D-max	B03	21	200	150	324 T	108.01	97	100	29	389,0	1068	280	367	1165	250	350	100	449	200	18	200	150	500	400	20	75	449,6	448	-
150-317	D-max	B03	21	200	150	326 T	108.01	97	100	29	389,0	1068	280	367	1165	250	350	100	449	200	18	200	150	500	400	20	75	449,6	464	-
200-315	K	B03	21	200	200	254 T	106.01	180	100	30	372,0	837	315	447	1017	240	435	118	532	200	18	200	150	500	400	19	75	315	333	-
200-315	K	B03	21	200	200	256 T	106.01	180	100	30	372,0	883	315	447	1063	240	435	118	532	200	18	200	150	500	400	19	75	315	353	-
200-315	K	B03	21	200	200	284 T	108.01	180	100	30	372,0	986	315	447	1166	240	435	118	532	200	18	200	150	500	400	19	75	401	392	-
200-315	K	B03	21	200	200	286 T	108.01	180	100	30	372,0	986	315	447	1166	240	435	118	532	200	18	200	150	500	400	19	75	401	423	-
200-315	K	B03	21	200	200	324 T	108.01	180	100	30	392,0	1071	315	447	1251	240	435	118	532	200	18	200	150	500	400	19	75	449,6	476	-
200-315	K	B03	21	200	200	326 T	108.01	180	100	30	392,0	1071	315	447	1251	240	435	118	532	200	18	200	150	500	400	19	75	449,6	492	-
200-315	D	B03	21	200	200	254 T	106.02	220	185	30	418,0	883	375	497	1103	290	450	143	572	200	30	210	150	550	450	19	50	315	411	-
200-315	D	B03	21	200	200	256 T	106.02	220	185	30	418,0	929	375	497	1149	290	450	143	572	200	30	210	150	550	450	19	50	315	431	-

Size	Impeller type	Bearing bracket	Figure see page	Flange		Motor	Foundation rail	Pump											Flanged spacer		Pump foot						Pump foot position	Motor	[kg] Ⓑ	Comment
				DN_1	DN_2			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	$øp_2$	a_1	$øp_1$	g_1	m_1	m_2	n_1	n_2	s_1	i	k_d Ⓑ		
200-315	D	B03	21	200	200	284 T	106.02	220	185	30	418,0	1032	375	497	1252	290	450	143	572	200	30	210	150	550	450	19	50	401	470	-
200-315	D	B03	21	200	200	286 T	106.02	220	185	30	418,0	1032	375	497	1252	290	450	143	572	200	30	210	150	550	450	19	50	401	501	-
200-315	D	B03	21	200	200	324 T	106.02	220	185	30	438,0	1117	375	497	1337	290	450	143	572	200	30	210	150	550	450	19	50	449,6	554	-
200-316	K	B03	21	200	200	254 T	106.01	180	100	30	372,0	837	315	447	1017	240	435	118	532	200	18	200	150	500	400	19	75	315	333	-
200-316	K	B03	21	200	200	256 T	106.01	180	100	30	372,0	883	315	447	1063	240	435	118	532	200	18	200	150	500	400	19	75	315	353	-
200-316	K	B03	21	200	200	284 T	106.01	180	100	30	372,0	986	315	447	1166	240	435	118	532	200	18	200	150	500	400	19	75	401	392	-
200-316	K	B03	21	200	200	286 T	106.01	180	100	30	372,0	986	315	447	1166	240	435	118	532	200	18	200	150	500	400	19	75	401	423	-
200-316	K	B03	21	200	200	324 T	106.01	180	100	30	392,0	1071	315	447	1251	240	435	118	532	200	18	200	150	500	400	19	75	449,6	476	-
200-316	K	B03	21	200	200	326 T	106.01	180	100	30	392,0	1071	315	447	1251	240	435	118	532	200	18	200	150	500	400	19	75	449,6	492	-
200-317	K	B03	21	200	200	254 T	106.01	147	100	29	367,0	831,7	315	447	979	260	410	118	502	200	18	210	150	500	400	19	80	315	357	-
200-317	K	B03	21	200	200	256 T	106.01	147	100	29	367,0	877,7	315	447	1025	260	410	118	502	200	18	210	150	500	400	19	80	315	377	-
200-317	K	B03	21	200	200	284 T	108.01	147	100	29	367,0	980,7	315	447	1128	260	410	118	502	200	18	210	150	500	400	19	80	401	416	-
200-317	K	B03	21	200	200	286 T	108.01	147	100	29	367,0	980,7	315	447	1128	260	410	118	502	200	18	210	150	500	400	19	80	401	447	-
200-317	K	B03	21	200	200	324 T	108.01	147	100	29	387,0	1066	315	447	1213	260	410	118	502	200	18	210	150	500	400	19	80	449,6	500	-
200-317	K	B03	21	200	200	326 T	108.01	147	100	29	387,0	1066	315	447	1213	260	410	118	502	200	18	210	150	500	400	19	80	449,6	516	-
200-318	K	B03	21	200	200	254 T	106.01	147	100	29	367,0	831,7	315	447	979	260	407	118	502	200	18	210	150	500	400	19	80	315	353	-
200-318	K	B03	21	200	200	256 T	106.01	147	100	29	367,0	877,7	315	447	1025	260	407	118	502	200	18	210	150	500	400	19	80	315	373	-
200-318	K	B03	21	200	200	284 T	108.01	147	100	29	367,0	980,7	315	447	1128	260	407	118	502	200	18	210	150	500	400	19	80	401	412	-
200-318	K	B03	21	200	200	286 T	108.01	147	100	29	367,0	980,7	315	447	1128	260	407	118	502	200	18	210	150	500	400	19	80	401	443	-
200-318	K	B03	21	200	200	324 T	108.01	147	100	29	387,0	1066	315	447	1213	260	407	118	502	200	18	210	150	500	400	19	80	449,6	496	-
200-318	K	B03	21	200	200	326 T	108.01	147	100	29	387,0	1066	315	447	1213	260	407	118	502	200	18	210	150	500	400	19	80	449,6	512	-

Installation type BLOC-VF

Table 16: Installation type BLOC-VF [mm], symbols key see page 23

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Suction elbow	Pump												Pump set / elbow				Motor	[kg]	Suction elbow						Chemical anchors			Comment
				DN_1	DN_2	DN_0			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	p_2	c	e	e_1	$øp_1$	kd Ⓑ		g_1	□ k	□ m	$øs_1$	t	[kg]		øN	L	
50-215	F	B01	22	65	50	65	182 T	65	97	65	20	304	592,7	170	222	690	135	150	-	165	-	264	80	221	119	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-215	F	B01	22	65	50	65	184 T	65	97	65	20	304	617,7	170	222	715	135	150	-	165	-	264	80	221	126	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-215	F	B01	22	65	50	65	213 T	65	97	65	20	304	672,4	170	222	769	135	150	-	165	-	264	80	262	139	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-215	F	B01	22	65	50	65	215 T	65	97	65	20	304	700,4	170	222	797	135	150	-	165	-	264	80	262	154	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-215	F	B01	22	65	50	65	254 T	65	97	65	20	304	768,7	170	222	866	135	150	-	165	-	264	80	315	194	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-215	F	B01	22	65	50	65	256 T	65	97	65	20	304	814,7	170	222	912	135	150	-	165	-	264	80	315	214	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-216	F	B01	22	65	50	65	182 T	65	97	65	20	304	592,7	170	222	690	135	150	-	165	-	264	80	221	119	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-216	F	B01	22	65	50	65	184 T	65	97	65	20	304	617,7	170	222	715	135	150	-	165	-	264	80	221	126	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-216	F	B01	22	65	50	65	213 T	65	97	65	20	304	672,4	170	222	769	135	150	-	165	-	264	80	262	139	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-216	F	B01	22	65	50	65	215 T	65	97	65	20	304	700,4	170	222	797	135	150	-	165	-	264	80	262	154	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-216	F	B01	22	65	50	65	254 T	65	97	65	20	304	768,7	170	222	866	135	150	-	165	-	264	80	315	194	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-216	F	B01	22	65	50	65	256 T	65	97	65	20	304	814,7	170	222	912	135	150	-	165	-	264	80	315	214	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-250	K	B01	22	65	50	65	182 T	65	97	65	20	230	519	170	222	616	155	155	-	165	-	264	80	221	113	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-250	K	B01	22	65	50	65	184 T	65	97	65	20	230	544	170	222	641	155	155	-	165	-	264	80	221	120	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-250	K	B01	22	65	50	65	213 T	65	97	65	20	230	598	170	222	695	155	155	-	165	-	264	80	262	133	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-250	K	B01	22	65	50	65	215 T	65	97	65	20	230	626	170	222	723	155	155	-	165	-	264	80	262	148	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-251	K	B02	22	65	50	65	182 T	65	97	65	20	230	519	170	222	616	155	155	-	165	-	264	80	221	118	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-251	K	B02	22	65	50	65	184 T	65	97	65	20	230	544	170	222	641	155	155	-	165	-	264	80	221	125	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-251	K	B02	22	65	50	65	213 T	65	97	65	20	230	598	170	222	695	155	155	-	165	-	264	80	262	138	16	150	200	18	290	35	M16×190	18	125	Ⓝ
50-251	K	B02	22	65	50	65	215 T	65	97	65	20	230	626	170	222	723	155	155	-	165	-	264	80	262	153	16	150	200	18	290	35	M16×190	18	125	Ⓝ
65-215	F	B01	22	80	65	80	182 T	80	97	65	20	323	611,7	225	237	709	130	155	-	165	-	264	80	221	124	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-215	F	B01	22	80	65	80	184 T	80	97	65	20	323	636,7	225	237	734	130	155	-	165	-	264	80	221	131	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-215	F	B01	22	80	65	80	213 T	80	97	65	20	323	691,4	225	237	788	130	155	-	165	-	264	80	262	144	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-215	F	B01	22	80	65	80	215 T	80	97	65	20	323	719,4	225	237	816	130	155	-	165	-	264	80	262	159	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-215	F	B01	22	80	65	80	254 T	80	97	65	20	323	787,7	225	237	885	130	155	-	165	-	264	80	315	199	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-215	F	B01	22	80	65	80	256 T	80	97	65	20	323	833,7	225	237	931	130	155	-	165	-	264	80	315	219	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-216	E	B02	22	80	65	80	182 T	80	97	65	22	352	640,7	225	237	738	155	190	-	165	-	264	80	221	133	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-216	E	B02	22	80	65	80	184 T	80	97	65	22	352	665,7	225	237	763	155	190	-	165	-	264	80	221	140	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-216	E	B02	22	80	65	80	213 T	80	97	65	22	352	720,4	225	237	817	155	190	-	165	-	264	80	262	153	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-216	E	B02	22	80	65	80	215 T	80	97	65	22	352	748,4	225	237	845	155	190	-	165	-	264	80	262	168	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-216	E	B02	22	80	65	80	254 T	80	97	65	22	352	816,7	225	237	914	155	190	-	165	-	264	80	315	208	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-216	E	B02	22	80	65	80	256 T	80	97	65	22	352	862,7	225	237	960	155	190	-	165	-	264	80	315	228	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-217	F	B01	22	80	65	80	182 T	80	97	65	20	301	589,7	225	237	687	130	155	-	165	-	264	80	221	118	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-217	F	B01	22	80	65	80	184 T	80	97	65	20	301	614,7	225	237	712	130	155	-	165	-	264	80	221	125	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-217	F	B01	22	80	65	80	213 T	80	97	65	20	301	669,4	225	237	766	130	155	-	165	-	264	80	262	138	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-217	F	B01	22	80	65	80	215 T	80	97	65	20	301	697,4	225	237	794	130	155	-	165	-	264	80	262	153	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-217	F	B01	22	80	65	80	254 T	80	97	65	20	301	765,7	225	237	863	130	155	-	165	-	264	80	315	193	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-217	F	B01	22	80	65	80	256 T	80	97	65	20	301	811,7	225	237	909	130	155	-	165	-	264	80	315	213	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-250	K	B01	22	80	65	80	182 T	80	97	65	20	252	541	225	237	638	160	200	-	165	-	264	80	221	125	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-250	K	B01	22	80	65	80	184 T	80	97	65	20	252	566	225	237	663	160	200	-	165	-	264	80	221	132	16	175	225	18	290	35	M16×190	18	125	Ⓝ
65-250	K	B01	22	80	65	80	213 T	80	97	65	20	252	620	225	237	717	160	200	-	165	-	264	80	262	145	16	175	225	18	290	35	M16×190	18	125	Ⓝ

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Suction elbow	Pump												Pump set / elbow				Motor	[kg] ⓓ	Suction elbow						Chemical anchors			Comment
				DN_1	DN_2	DN_0			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	p_2	c	e	e_1	$øp_1$	kd Ⓑ		g_1	□ k	□ m	$øs_1$	t	[kg]		øN	L	
65-250	K	B01	22	80	65	80	215 T	80	97	65	20	252	648	225	237	745	160	200	-	165	-	264	80	262	160	16	175	225	18	290	35	M16×190	18	125	Ⓝ
80-216	F	B01	22	100	80	100	182 T	100	123	65	22	336	624,7	225	247	748	130	165	-	180	-	305	120	221	122	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	F	B01	22	100	80	100	184 T	100	123	65	22	336	649,7	225	247	773	130	165	-	180	-	305	120	221	129	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	F	B01	22	100	80	100	213 T	100	123	65	22	336	704,4	225	247	827	130	165	-	180	-	305	120	262	142	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	F	B01	22	100	80	100	215 T	100	123	65	22	336	732,4	225	247	855	130	165	-	180	-	305	120	262	157	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	F	B01	22	100	80	100	254 T	100	123	65	22	336	800,7	225	247	924	130	165	-	180	-	305	120	315	197	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	F	B01	22	100	80	100	256 T	100	123	65	22	336	846,7	225	247	970	130	165	-	180	-	305	120	315	217	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	F	B01	22	100	80	100	284 T	100	123	65	22	358,5	972,2	225	247	1095	130	165	-	180	-	305	120	401	256	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	E	B02	22	100	80	100	182 T	100	123	65	22	359,5	648,2	225	247	771	165	200	-	180	-	305	120	221	144	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	E	B02	22	100	80	100	184 T	100	123	65	22	359,5	673,2	225	247	796	165	200	-	180	-	305	120	221	151	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	E	B02	22	100	80	100	213 T	100	123	65	22	359,5	727,9	225	247	851	165	200	-	180	-	305	120	262	164	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	E	B02	22	100	80	100	215 T	100	123	65	22	359,5	755,9	225	247	879	165	200	-	180	-	305	120	262	179	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	E	B02	22	100	80	100	254 T	100	123	65	22	359,5	824,2	225	247	947	165	200	-	180	-	305	120	315	219	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	E	B02	22	100	80	100	256 T	100	123	65	22	359,5	870,2	225	247	993	165	200	-	180	-	305	120	315	239	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-216	E	B02	22	100	80	100	284 T	100	123	65	22	384,5	998,2	225	247	1121	165	200	-	180	-	305	120	401	278	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-217	F	B01	22	100	80	100	182 T	100	123	65	22	308	596,7	225	247	720	130	165	-	180	-	305	120	221	122	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-217	F	B01	22	100	80	100	184 T	100	123	65	22	308	621,7	225	247	745	130	165	-	180	-	305	120	221	129	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-217	F	B01	22	100	80	100	213 T	100	123	65	22	308	676,4	225	247	799	130	165	-	180	-	305	120	262	142	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-217	F	B01	22	100	80	100	215 T	100	123	65	22	308	704,4	225	247	827	130	165	-	180	-	305	120	262	157	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-217	F	B01	22	100	80	100	254 T	100	123	65	22	308	772,7	225	247	896	130	165	-	180	-	305	120	315	197	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-217	F	B01	22	100	80	100	256 T	100	123	65	22	308	818,7	225	247	942	130	165	-	180	-	305	120	315	217	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-217	F	B01	22	100	80	100	284 T	100	123	65	22	330,5	944,2	225	247	1067	130	165	-	180	-	305	120	401	256	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-250	K	B01	22	100	80	100	182 T	100	107	65	20	254	543	225	247	650	160	175	-	180	-	289	120	221	129	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-250	K	B01	22	100	80	100	184 T	100	107	65	20	254	568	225	247	675	160	175	-	180	-	289	120	221	136	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-250	K	B01	22	100	80	100	213 T	100	107	65	20	254	622	225	247	729	160	175	-	180	-	289	120	262	149	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-250	K	B01	22	100	80	100	215 T	100	107	65	20	254	650	225	247	757	160	175	-	180	-	289	120	262	164	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-252	F	B01	22	100	80	100	182 T	100	107	65	20	254	543	225	247	650	160	175	-	180	-	289	120	221	129	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-252	F	B01	22	100	80	100	184 T	100	107	65	20	254	568	225	247	675	160	175	-	180	-	289	120	221	136	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-252	F	B01	22	100	80	100	213 T	100	107	65	20	254	622	225	247	729	160	175	-	180	-	289	120	262	149	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-252	F	B01	22	100	80	100	215 T	100	107	65	20	254	650	225	247	757	160	175	-	180	-	289	120	262	164	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	F	B02	22	100	80	100	182 T	100	121	65	20	335	624	225	247	745	160	175	-	180	-	303	120	221	137	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	F	B02	22	100	80	100	184 T	100	121	65	20	335	649	225	247	770	160	175	-	180	-	303	120	221	144	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	F	B02	22	100	80	100	213 T	100	121	65	20	335	703	225	247	824	160	175	-	180	-	303	120	262	157	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	F	B02	22	100	80	100	215 T	100	121	65	20	335	731	225	247	852	160	175	-	180	-	303	120	262	172	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	F	B02	22	100	80	100	254 T	100	121	65	20	335	800	225	247	921	160	175	-	180	-	303	120	315	212	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	F	B02	22	100	80	100	256 T	100	121	65	20	335	846	225	247	967	160	175	-	180	-	303	120	315	232	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	F	B02	22	100	80	100	284 T	100	121	65	20	335	949	225	247	1070	160	175	-	180	-	303	120	401	271	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	F	B02	22	100	80	100	286 T	100	121	65	20	335	949	225	247	1070	160	175	-	180	-	303	120	401	302	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	E	B02	22	100	80	100	182 T	100	121	65	20	335	624	225	247	745	160	175	-	180	-	303	120	221	146	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	E	B02	22	100	80	100	184 T	100	121	65	20	335	649	225	247	770	160	175	-	180	-	303	120	221	153	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	E	B02	22	100	80	100	213 T	100	121	65	20	335	703	225	247	824	160	175	-	180	-	303	120	262	166	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	E	B02	22	100	80	100	215 T	100	121	65	20	335	731	225	247	852	160	175	-	180	-	303	120	262	181	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	E	B02	22	100	80	100	254 T	100	121	65	20	335	800	225	247	921	160	175	-	180	-	303	120	315	221	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	E	B02	22	100	80	100	256 T	100	121	65	20	335	846	225	247	967	160	175	-	180	-	303	120	315	241	20	200	250	18	330	40	M16×190	18	125	Ⓝ

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Suction elbow	Pump													Pump set / elbow				Motor	[kg] ⓓ	Suction elbow						Chemical anchors			Comment
				DN_1	DN_2	DN_0			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	p_2	c	e	e_1	$øp_1$	kd Ⓑ		g_1	□ k	□ m	$øs_1$	t	[kg]		øN	L	
80-253	E	B02	22	100	80	100	284 T	100	121	65	20	335	949	225	247	1070	160	175	-	180	-	303	120	401	280	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-253	E	B02	22	100	80	100	286 T	100	121	65	20	335	949	225	247	1070	160	175	-	180	-	303	120	401	311	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	K	B03	22	100	80	100	213 T	100	107	80	20	346	714	225	247	821	180	180	-	180	-	289	120	262	178	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	K	B03	22	100	80	100	215 T	100	107	80	20	346	742	225	247	849	180	180	-	180	-	289	120	262	193	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	K	B03	22	100	80	100	254 T	100	107	80	20	346	811	225	247	918	180	180	-	180	-	289	120	315	233	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	K	B03	22	100	80	100	256 T	100	107	80	20	346	857	225	247	964	180	180	-	180	-	289	120	315	253	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	K	B03	22	100	80	100	284 T	100	107	80	20	346	960	225	247	1067	180	180	-	180	-	289	120	401	292	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	K	B03	22	100	80	100	286 T	100	107	80	20	346	960	225	247	1067	180	180	-	180	-	289	120	401	323	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	D	B03	22	100	80	100	213 T	100	187	90	22	345	713	280	257	900	180	205	-	180	-	369	120	262	239	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	D	B03	22	100	80	100	215 T	100	187	90	22	345	741,4	280	257	928	180	205	-	180	-	369	120	262	254	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	D	B03	22	100	80	100	254 T	100	187	90	22	345	809,7	280	257	997	180	205	-	180	-	369	120	315	294	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	D	B03	22	100	80	100	256 T	100	187	90	22	345	855,7	280	257	1043	180	205	-	180	-	369	120	315	314	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	D	B03	22	100	80	100	284 T	100	187	90	22	345	958,7	280	257	1146	180	205	-	180	-	369	120	401	353	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-315	D	B03	22	100	80	100	286 T	100	187	90	22	345	958,7	280	257	1146	180	205	-	180	-	369	120	401	384	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-316	D	B03	22	125	80	125	213 T	125	207	70	22	345	713	280	297	920	195	225	-	200	-	409	120	262	239	20	250	300	18	370	45	M16×190	18	125	Ⓝ
80-316	D	B03	22	125	80	125	215 T	125	207	70	22	345	741	280	297	948	195	225	-	200	-	409	120	262	254	20	250	300	18	370	45	M16×190	18	125	Ⓝ
80-316	D	B03	22	125	80	125	254 T	125	207	70	22	345	810	280	297	1017	195	225	-	200	-	409	120	315	294	20	250	300	18	370	45	M16×190	18	125	Ⓝ
80-316	D	B03	22	125	80	125	256 T	125	207	70	22	345	856	280	297	1063	195	225	-	200	-	409	120	315	314	20	250	300	18	370	45	M16×190	18	125	Ⓝ
80-316	D	B03	22	125	80	125	284 T	125	207	70	22	345	959	280	297	1166	195	225	-	200	-	409	120	401	353	20	250	300	18	370	45	M16×190	18	125	Ⓝ
80-317	F	B03	22	100	80	100	213 T	100	107	80	20	346	714	225	247	821	180	180	-	180	-	289	120	262	178	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-317	F	B03	22	100	80	100	215 T	100	107	80	20	346	742	225	247	849	180	180	-	180	-	289	120	262	193	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-317	F	B03	22	100	80	100	254 T	100	107	80	20	346	811	225	247	918	180	180	-	180	-	289	120	315	233	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-317	F	B03	22	100	80	100	256 T	100	107	80	20	346	857	225	247	964	180	180	-	180	-	289	120	315	253	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-317	F	B03	22	100	80	100	284 T	100	107	80	20	346	960	225	247	1067	180	180	-	180	-	289	120	401	292	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-317	F	B03	22	100	80	100	286 T	100	107	80	20	346	960	225	247	1067	180	180	-	180	-	289	120	401	323	20,0	200	250	18	330	40	M16×190	18	125	Ⓝ
80-317	D	B03	22	100	80	125	213 T	100	172	90	22	351	719	280	257	891	181	201	-	180	-	354	120	262	241	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-317	D	B03	22	100	80	125	215 T	100	172	90	22	351	747	280	257	919	181	201	-	180	-	354	120	262	256	20	200	250	18	330	40	M16×190	18	125	Ⓝ
80-317	D	B03	22	100	80	125	254 T	100	172	90	22	351	816	280	257	988	181	201	-	180	-	354	120	315	296	20	200	250	18	330	40	M16×190	18	125	Ⓝ
100-215	F	B01	22	100	100	100	182 T	100	137	80	27	345	633,7	225	277	771	205	240	100	180	-	319	120	221	135	20	200	250	18	330	40	M16×190	18	125	-
100-215	F	B01	22	100	100	100	184 T	100	137	80	27	345	658,7	225	277	796	205	240	100	180	-	319	120	221	142	20	200	250	18	330	40	M16×190	18	125	-
100-215	F	B01	22	100	100	100	213 T	100	137	80	27	345	713,4	225	277	850	205	240	100	180	-	319	120	262	155	20	200	250	18	330	40	M16×190	18	125	-
100-215	F	B01	22	100	100	100	215 T	100	137	80	27	345	741,4	225	277	878	205	240	100	180	-	319	120	262	170	20	200	250	18	330	40	M16×190	18	125	-
100-251	F	B02	22	100	100	100	213 T	100	137	80	27	332	700	225	277	837	180	280	118	180	-	319	120	262	160	20	200	250	18	330	40	M16×190	18	125	-
100-251	F	B02	22	100	100	100	215 T	100	137	80	27	332	728	225	277	865	180	280	118	180	-	319	120	262	175	20	200	250	18	330	40	M16×190	18	125	-
100-251	F	B02	22	100	100	100	254 T	100	137	80	27	332	797	225	277	934	180	280	118	180	-	319	120	315	215	20	200	250	18	330	40	M16×190	18	125	-
100-251	F	B02	22	100	100	100	256 T	100	137	80	27	332	843	225	277	980	180	280	118	180	-	319	120	315	235	20	200	250	18	330	40	M16×190	18	125	-
100-251	F	B02	22	100	100	100	284 T	100	137	80	27	332	946	225	277	1083	180	280	118	180	-	319	120	401	274	20	200	250	18	330	40	M16×190	18	125	-
100-251	F	B02	22	100	100	100	286 T	100	137	80	27	332	946	225	277	1083	180	280	118	180	-	319	120	401	305	20	200	250	18	330	40	M16×190	18	125	-
100-252	F	B01	22	100	100	100	213 T	100	137	80	27	309	677	225	277	814	180	280	118	180	-	319	120	262	155	20	200	250	18	330	40	M16×190	18	125	-
100-252	F	B01	22	100	100	100	215 T	100	137	80	27	309	705	225	277	842	180	280	118	180	-	319	120	262	170	20	200	250	18	330	40	M16×190	18	125	-
100-253	F	B02	22	100	100	100	213 T	100	137	80	27	332	700	225	277	837	180	280	118	180	-	319	120	262	160	20	200	250	18	330	40	M16×190	18	125	-
100-253	F	B02	22	100	100	100	215 T	100	137	80	27	332	728	225	277	865	180	280	118	180	-	319	120	262	175	20	200	250	18	330	40	M16×190	18	125	-
100-253	F	B02	22	100	100	100	254 T	100	137	80	27	332	797	225	277	934	180	280	118	180	-	319	120	315	215	20	200	250	18	330	40	M16×190	18	125	-
100-253	F	B02	22	100	100	100	256 T	100	137	80	27	332	843	225	277	980	180	280	118	180	-	319	120	315	235	20	200	250	18	330	40	M16×190	18	125	-

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Suction elbow	Pump													Pump set / elbow				Motor	[kg]	Suction elbow						Chemical anchors			Comment
				DN_1	DN_2	DN_0			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	p_2	c	e	e_1	$øp_1$	kd Ⓑ		g_1	□ k	□ m	$øs_1$	t	[kg]		øN	L	
100-253	F	B02	22	100	100	100	284 T	100	137	80	27	332	946	225	277	1083	180	280	118	180	-	319	120	401	274	20	200	250	18	330	40	M16×190	18	125	-
100-253	F	B02	22	100	100	100	286 T	100	137	80	27	332	946	225	277	1083	180	280	118	180	-	319	120	401	305	20	200	250	18	330	40	M16×190	18	125	-
100-253	K	B02	22	100	100	100	213 T	100	137	80	27	335	703	225	277	840	205	282	90	180	-	319	120	262	176	20	200	250	18	330	40	M16×190	18	125	-
100-253	K	B02	22	100	100	100	215 T	100	137	80	27	335	731	225	277	868	205	282	90	180	-	319	120	262	191	20	200	250	18	330	40	M16×190	18	125	-
100-253	K	B02	22	100	100	100	254 T	100	137	80	27	335	800	225	277	937	205	282	90	180	-	319	120	315	231	20	200	250	18	330	40	M16×190	18	125	-
100-253	K	B02	22	100	100	100	256 T	100	137	80	27	335	846	225	277	983	205	282	90	180	-	319	120	315	251	20	200	250	18	330	40	M16×190	18	125	-
100-253	K	B02	22	100	100	100	284 T	100	137	80	27	335	949	225	277	1086	205	282	90	180	-	319	120	401	290	20	200	250	18	330	40	M16×190	18	125	-
100-253	K	B02	22	100	100	100	286 T	100	137	80	27	335	949	225	277	1086	205	282	90	180	-	319	120	401	321	20	200	250	18	330	40	M16×190	18	125	-
100-253	D	B02	22	150	100	150	213 T	150	202	70	27	332	700	280	380	902	205	330	100	220	-	424	120	262	239	22	250	300	18	425	55	M16×190	18	125	-
100-253	D	B02	22	150	100	150	215 T	150	202	70	27	332	728	280	380	930	205	330	100	220	-	424	120	262	254	22	250	300	18	425	55	M16×190	18	125	-
100-253	D	B02	22	150	100	150	254 T	150	202	70	27	332	797	280	380	999	205	330	100	220	-	424	120	315	294	22	250	300	18	425	55	M16×190	18	125	-
100-253	D	B02	22	150	100	150	256 T	150	202	70	27	332	843	280	380	1045	205	330	100	220	-	424	120	315	314	22	250	300	18	425	55	M16×190	18	125	-
100-254	F	B01	22	100	100	100	213 T	100	137	80	27	309	677	225	277	814	180	280	118	180	-	319	120	262	155	20	200	250	18	330	40	M16×190	18	125	-
100-254	F	B01	22	100	100	100	215 T	100	137	80	27	309	705	225	277	842	180	280	118	180	-	319	120	262	170	20	200	250	18	330	40	M16×190	18	125	-
100-254	K	B01	22	100	100	100	213 T	100	137	80	27	309	677	225	277	814	180	280	118	180	-	319	120	262	155	20	200	250	18	330	40	M16×190	18	125	-
100-254	K	B01	22	100	100	100	215 T	100	137	80	27	309	705	225	277	842	180	280	118	180	-	319	120	262	170	20	200	250	18	330	40	M16×190	18	125	-
100-254	K	B01	22	100	100	100	254 T	100	137	80	27	309	774	225	277	911	180	280	118	180	-	319	120	315	210	20	200	250	18	330	40	M16×190	18	125	-
100-254	K	B01	22	100	100	100	256 T	100	137	80	27	309	820	225	277	957	180	280	118	180	-	319	120	315	230	20	200	250	18	330	40	M16×190	18	125	-
100-254	K	B01	22	100	100	100	284 T	100	137	80	27	309	923	225	277	1060	180	280	118	180	-	319	120	401	269	20	200	250	18	330	40	M16×190	18	125	-
100-254	K	B01	22	100	100	100	286 T	100	137	80	27	309	923	225	277	1060	180	280	118	180	-	319	120	401	300	20	200	250	18	330	40	M16×190	18	125	-
100-316	F	B03	22	150	100	150	213 T	150	140	80	25	336	704	280	315	844	200	290	90	220	-	360	120	262	223	22	250	300	18	425	55	M16×190	18	125	-
100-316	F	B03	22	150	100	150	215 T	150	140	80	25	336	732	280	315	872	200	290	90	220	-	360	120	262	238	22	250	300	18	425	55	M16×190	18	125	-
100-316	F	B03	22	150	100	150	254 T	150	140	80	25	336	801	280	315	941	200	290	90	220	-	360	120	315	278	22	250	300	18	425	55	M16×190	18	125	-
100-316	F	B03	22	150	100	150	256 T	150	140	80	25	336	847	280	315	987	200	290	90	220	-	360	120	315	289	22	250	300	18	425	55	M16×190	18	125	-
100-316	F	B03	22	150	100	150	284 T	150	140	80	25	336	950	280	315	1090	200	290	90	220	-	360	120	401	337	22	250	300	18	425	55	M16×190	18	125	-
100-316	F	B03	22	150	100	150	286 T	150	140	80	25	336	950	280	315	1090	200	290	90	220	-	360	120	401	368	22	250	300	18	425	55	M16×190	18	125	-
100-316	F	B03	22	150	100	150	324 T	150	140	80	25	356	1035	280	315	1175	200	290	90	220	-	360	120	449,6	421	22	250	300	18	425	55	M16×190	18	125	-
100-316	F	B03	22	150	100	150	326 T	150	140	80	25	356	1035	280	315	1175	200	290	90	220	-	360	120	449,6	437	22	250	300	18	425	55	M16×190	18	125	-
100-316	K	B03	22	150	100	150	213 T	150	140	80	25	336	704	280	315	844	200	290	90	220	-	360	120	262	223	22	250	300	18	425	55	M16×190	18	125	-
100-316	K	B03	22	150	100	150	215 T	150	140	80	25	336	732	280	315	872	200	290	90	220	-	360	120	262	238	22	250	300	18	425	55	M16×190	18	125	-
100-316	K	B03	22	150	100	150	254 T	150	140	80	25	336	801	280	315	941	200	290	90	220	-	360	120	315	278	22	250	300	18	425	55	M16×190	18	125	-
100-316	K	B03	22	150	100	150	256 T	150	140	80	25	336	847	280	315	987	200	290	90	220	-	360	120	315	289	22	250	300	18	425	55	M16×190	18	125	-
100-316	K	B03	22	150	100	150	284 T	150	140	80	25	336	950	280	315	1090	200	290	90	220	-	360	120	401	337	22	250	300	18	425	55	M16×190	18	125	-
100-316	K	B03	22	150	100	150	286 T	150	140	80	25	333	950	280	315	1090	200	290	90	220	-	360	120	401	368	22	250	300	18	425	55	M16×190	18	125	-
100-316	K	B03	22	150	100	150	324 T	150	140	80	25	356	1035	280	315	1175	200	290	90	220	-	360	120	449,6	421	22	250	300	18	425	55	M16×190	18	125	-
100-316	K	B03	22	150	100	150	326 T	150	140	80	25	356	1035	280	315	1175	200	290	90	220	-	360	120	449,6	437	22	250	300	18	425	55	M16×190	18	125	-
100-316	D	B03	22	150	100	150	254 T	150	237	70	27	354	819	280	337	1056	210	305	100	220	-	459	120	315	320	22	250	300	18	425	55	M16×190	18	125	-
100-316	D	B03	22	150	100	150	256 T	150	237	70	27	354	865	280	337	1102	210	305	100	220	-	459	120	315	340	22	250	300	18	425	55	M16×190	18	125	-
100-316	D	B03	22	150	100	150	284 T	150	237	70	27	374	988	280	337	1225	210	305	100	220	-	459	120	401	379	22	250	300	18	425	55	M16×190	18	125	-
100-316	D	B03	22	150	100	150	286 T	150	237	70	27	374	988	280	337	1225	210	305	100	220	-	459	120	401	410	22	250	300	18	425	55	M16×190	18	125	-
150-253	D	B02	22	150	150	150	215 T	150	163	150	29	378	774	280	397	937	219	340	120	220	-	385	120	262	250	22	250	300	18	425	55	M16×190	18	125	-
150-253	D	B02	22	150	150	150	254 T	150	163	150	29	378	842	280	397	1005	219	340	120	220	-	385	120	315	290	22	250	300	18	425	55	M16×190	18	125	-
150-253	D	B02	22	150	150	150	256 T	150	163	150	29	378	888	280	397	1051	219	340	120	220	-	385	120	315	310	22	250	300	18	425	55	M16×190	18	125	-
150-315	F	B03	22	150	150	150	213 T	150	163	100	29	393	761	280	397	924	250	345	118	220	-	385	120	262	226	22	250	300	18	425	55	M16×190	18	125	-
150-315	F	B03	22	150	150	150	215 T	150	163	100	29	393	789	280	397	952	250	345	118	220	-	385	120	262	241	22	250	300	18	425	55	M16×190	18	125	-

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Suction elbow	Pump												Pump set / elbow				Motor	[kg] ⓓ	Suction elbow						Chemical anchors			Comment
				DN_1	DN_2	DN_0			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	p_2	c	e	e_1	$øp_1$	kd Ⓑ		g_1	□ k	□ m	$øs_1$	t	[kg]		øN	L	
150-315	F	B03	22	150	150	150	254 T	150	163	100	29	393	858	280	397	1021	250	345	118	220	-	385	120	315	281	22	250	300	18	425	55	M16×190	18	125	-
150-315	F	B03	22	150	150	150	256 T	150	163	100	29	393	904	280	397	1067	250	345	118	220	-	385	120	315	301	22	250	300	18	425	55	M16×190	18	125	-
150-315	F	B03	22	150	150	150	284 T	150	163	100	29	393	1007	280	397	1170	250	345	118	220	-	385	120	401	340	22	250	300	18	425	55	M16×190	18	125	-
150-315	F	B03	22	150	150	150	286 T	150	163	100	29	393	1007	280	397	1170	250	345	118	220	-	385	120	401	371	22	250	300	18	425	55	M16×190	18	125	-
150-315	F	B03	22	150	150	150	324 T	150	163	100	29	413	1092	280	397	1255	250	345	118	220	-	385	120	449,6	424	22	250	300	18	425	55	M16×190	18	125	-
150-315	F	B03	22	150	150	150	326 T	150	163	100	29	413	1092	280	397	1255	250	345	118	220	-	385	120	449,6	440	22	250	300	18	425	55	M16×190	18	125	-
150-315	K	B03	22	150	150	150	213 T	150	163	100	29	393	761	280	397	924	250	345	118	220	-	385	120	262	226	22	250	300	18	425	55	M16×190	18	125	-
150-315	K	B03	22	150	150	150	215 T	150	163	100	29	393	789	280	397	952	250	345	118	220	-	385	120	262	241	22	250	300	18	425	55	M16×190	18	125	-
150-315	K	B03	22	150	150	150	254 T	150	163	100	29	393	858	280	397	1021	250	345	118	220	-	385	120	315	281	22	250	300	18	425	55	M16×190	18	125	-
150-315	K	B03	22	150	150	150	256 T	150	163	100	29	393	904	280	397	1067	250	345	118	220	-	385	120	315	301	22	250	300	18	425	55	M16×190	18	125	-
150-315	K	B03	22	150	150	150	284 T	150	163	100	29	393	1007	280	397	1170	250	345	118	220	-	385	120	401	340	22	250	300	18	425	55	M16×190	18	125	-
150-315	K	B03	22	150	150	150	286 T	150	163	100	29	393	1007	280	397	1170	250	345	118	220	-	385	120	401	371	22	250	300	18	425	55	M16×190	18	125	-
150-315	K	B03	22	150	150	150	324 T	150	163	100	29	413	1092	280	397	1255	250	345	118	220	-	385	120	449,6	424	22	250	300	18	425	55	M16×190	18	125	-
150-315	K	B03	22	150	150	150	326 T	150	163	100	29	413	1092	280	397	1255	250	345	118	220	-	385	120	449,6	440	22	250	300	18	425	55	M16×190	18	125	-
150-315	D	B03	22	150	150	150	254 T	150	217	150	29	369	834	315	397	1051	250	385	120	220	-	439	120	315	362	22	250	300	18	425	55	M16×190	18	125	-
150-315	D	B03	22	150	150	150	256 T	150	217	150	29	369	880	315	397	1097	250	385	120	220	-	439	120	315	382	22	250	300	18	425	55	M16×190	18	125	-
150-315	D	B03	22	150	150	150	284 T	150	217	150	29	369	983	315	397	1200	250	385	120	220	-	439	120	401	421	22	250	300	18	425	55	M16×190	18	125	-
150-315	D	B03	22	150	150	150	286 T	150	217	150	29	369	983	315	397	1200	250	385	120	220	-	439	120	401	452	22	250	300	18	425	55	M16×190	18	125	-
150-317	K	B03	22	150	150	150	213 T	150	97	100	29	369	737	280	367	834	250	350	100	220	-	319	120	262	250	22	250	300	18	425	55	M16×190	18	125	-
150-317	K	B03	22	150	150	150	215 T	150	97	100	29	369	765	280	367	862	250	350	100	220	-	319	120	262	265	22	250	300	18	425	55	M16×190	18	125	-
150-317	K	B03	22	150	150	150	254 T	150	97	100	29	369	834	280	367	931	250	350	100	220	-	319	120	315	305	22	250	300	18	425	55	M16×190	18	125	-
150-317	K	B03	22	150	150	150	256 T	150	97	100	29	369	880	280	367	977	250	350	100	220	-	319	120	315	325	22	250	300	18	425	55	M16×190	18	125	-
150-317	K	B03	22	150	150	150	284 T	150	97	100	29	369	983	280	367	1080	250	350	100	220	-	319	120	401	364	22	250	300	18	425	55	M16×190	18	125	-
150-317	K	B03	22	150	150	150	286 T	150	97	100	29	369	983	280	367	1080	250	350	100	220	-	319	120	401	395	22	250	300	18	425	55	M16×190	18	125	-
150-317	K	B03	22	150	150	150	324 T	150	97	100	29	389	1068	280	367	1165	250	350	100	220	-	319	120	449,6	448	22	250	300	18	425	55	M16×190	18	125	-
150-317	K	B03	22	150	150	150	326 T	150	97	100	29	389	1068	280	367	1165	250	350	100	220	-	319	120	449,6	464	22	250	300	18	425	55	M16×190	18	125	-
150-317	D	B03	22	200	150	200	213 T	200	97	100	29	369	737	280	367	834	250	350	100	260	-	359	150	262	250	22	560	660	22	550	70	M16×190	18	125	-
150-317	D	B03	22	200	150	200	215 T	200	97	100	29	369	765	280	367	862	250	350	100	260	-	359	150	262	265	22	560	660	22	550	70	M16×190	18	125	-
150-317	D	B03	22	200	150	200	254 T	200	97	100	29	369	834	280	367	931	250	350	100	260	-	359	150	315	305	22	560	660	22	550	70	M16×190	18	125	-
150-317	D	B03	22	200	150	200	256 T	200	97	100	29	369	880	280	367	977	250	350	100	260	-	359	150	315	325	22	560	660	22	550	70	M16×190	18	125	-
150-317	D	B03	22	200	150	200	284 T	200	97	100	29	369	983	280	367	1080	250	350	100	260	-	359	150	401	364	22	560	660	22	550	70	M16×190	18	125	-
150-317	D	B03	22	200	150	200	286 T	200	97	100	29	369	983	280	367	1080	250	350	100	260	-	359	150	401	395	22	560	660	22	550	70	M16×190	18	125	-
150-317	D	B03	22	200	150	200	324 T	200	97	100	29	389	1068	280	367	1165	250	350	100	260	-	359	150	449,6	448	22	560	660	22	550	70	M16×190	18	125	-
150-317	D	B03	22	200	150	200	326 T	200	97	100	29	389	1068	280	367	1165	250	350	100	260	-	359	150	449,6	464	22	560	660	22	550	70	M16×190	18	125	-
200-315	K	B03	22	200	200	200	254 T	200	180	100	30	372	837	315	447	1017	240	435	118	260	-	442	150	315	333	22	560	660	22	550	70	M16×190	18	125	-
200-315	K	B03	22	200	200	200	256 T	200	180	100	30	372	883	315	447	1063	240	435	118	260	-	442	150	315	353	22	560	660	22	550	70	M16×190	18	125	-
200-315	K	B03	22	200	200	200	284 T	200	180	100	30	372	986	315	447	1166	240	435	118	260	-	442	150	401	392	22	560	660	22	550	70	M16×190	18	125	-
200-315	K	B03	22	200	200	200	286 T	200	180	100	30	372	986	315	447	1166	240	435	118	260	-	442	150	401	423	22	560	660	22	550	70	M16×190	18	125	-
200-315	K	B03	22	200	200	200	324 T	200	180	100	30	392	1071	315	447	1251	240	435	118	260	-	442	150	449,6	476	22	560	660	22	550	70	M16×190	18	125	-
200-315	K	B03	22	200	200	200	326 T	200	180	100	30	392	1071	315	447	1251	240	435	118	260	-	442	150	449,6	492	22	560	660	22	550	70	M16×190	18	125	-
200-315	D	B03	22	200	200	200	254 T	200	220	185	30	418	883	375	497	1103	290	450	143	260	-	482	150	315	411	22	560	660	22	550	70	M16×190	18	125	-
200-315	D	B03	22	200	200	200	256 T	200	220	185	30	418	929	375	497	1149	290	450	143	260	-	482	150	315	431	22	560	660	22	550	70	M16×190	18	125	-
200-315	D	B03	22	200	200	200	284 T	200	220	185	30	418	1032	375	497	1252	290	450	143	260	-	482	150	401	470	22	560	660	22	550	70	M16×190	18	125	-
200-315	D	B03	22	200	200	200	286 T	200	220	185	30	418	1032	375	497	1252	290	450	143	260	-	482	150	401	501	22	560	660	22	550	70	M16×190	18	125	-
200-315	D	B03	22	200	200	200	324 T	200	220	185	30	438	1117	375	497	1337	290	450	143	260	-	482	150	449,6	554	22	560	660	22	550	70	M16×190	18	125	-

Size	Impeller type	Bearing bracket	Figure see page	Flange			Motor	Suction elbow	Pump													Pump set / elbow				Motor	[kg] ⓓ	Suction elbow						Chemical anchors			Comment
				DN_1	DN_2	DN_0			a	b	b_f	f_1	f_2 Ⓑ	h_1	h_2	l Ⓑ	n_7	n_8	p_2	c	e	e_1	$øp_1$	kd Ⓑ		g_1	□ k	□ m	$øs_1$	t	[kg]		øN	L	
200-315	D	B03	22	200	200	200	326 T	200	220	185	30	438	1117	375	497	1337	290	450	143	260	-	482	150	449,6	570	22	560	660	22	550	70	M16×190	18	125	-
200-316	K	B03	22	200	200	200	254 T	200	180	100	30	372	837	315	447	1017	240	435	118	260	-	442	150	315	333	22	560	660	22	550	70	M16×190	18	125	-
200-316	K	B03	22	200	200	200	256 T	200	180	100	30	372	883	315	447	1063	240	435	118	260	-	442	150	315	353	22	560	660	22	550	70	M16×190	18	125	-
200-316	K	B03	22	200	200	200	284 T	200	180	100	30	372	986	315	447	1166	240	435	118	260	-	442	150	401	392	22	560	660	22	550	70	M16×190	18	125	-
200-316	K	B03	22	200	200	200	286 T	200	180	100	30	372	986	315	447	1166	240	435	118	260	-	442	150	401	423	22	560	660	22	550	70	M16×190	18	125	-
200-316	K	B03	22	200	200	200	324 T	200	180	100	30	392	1071	315	447	1251	240	435	118	260	-	442	150	449,6	476	22	560	660	22	550	70	M16×190	18	125	-
200-316	K	B03	22	200	200	200	326 T	200	180	100	30	392	1071	315	447	1251	240	435	118	260	-	442	150	449,6	492	22	560	660	22	550	70	M16×190	18	125	-
200-317	K	B03	22	200	200	200	254 T	200	147	100	29	367	831,7	315	447	979	260	410	118	260	-	409	150	315	357	22	560	660	22	550	70	M16×190	18	125	-
200-317	K	B03	22	200	200	200	256 T	200	147	100	29	367	877,7	315	447	1025	260	410	118	260	-	409	150	315	377	22	560	660	22	550	70	M16×190	18	125	-
200-317	K	B03	22	200	200	200	284 T	200	147	100	29	367	980,7	315	447	1128	260	410	118	260	-	409	150	401	416	22	560	660	22	550	70	M16×190	18	125	-
200-317	K	B03	22	200	200	200	286 T	200	147	100	29	367	980,7	315	447	1128	260	410	118	260	-	409	150	401	447	22	560	660	22	550	70	M16×190	18	125	-
200-317	K	B03	22	200	200	200	324 T	200	147	100	29	387	1066,1	315	447	1213	260	410	118	260	-	409	150	449,6	500	22	560	660	22	550	70	M16×190	18	125	-
200-317	K	B03	22	200	200	200	326 T	200	147	100	29	387	1066,1	315	447	1213	260	410	118	260	-	409	150	449,6	516	22	560	660	22	550	70	M16×190	18	125	-
200-318	K	B03	22	200	200	200	254 T	200	147	100	29	367	831,7	315	447	979	260	407	118	260	-	409	150	315	353	22	560	660	22	550	70	M16×190	18	125	-
200-318	K	B03	22	200	200	200	256 T	200	147	100	29	367	877,7	315	447	1025	260	407	118	260	-	409	150	315	373	22	560	660	22	550	70	M16×190	18	125	-
200-318	K	B03	22	200	200	200	284 T	200	147	100	29	367	980,7	315	447	1128	260	407	118	260	-	409	150	401	412	22	560	660	22	550	70	M16×190	18	125	-
200-318	K	B03	22	200	200	200	286 T	200	147	100	29	367	980,7	315	447	1128	260	407	118	260	-	409	150	401	443	22	560	660	22	550	70	M16×190	18	125	-
200-318	K	B03	22	200	200	200	324 T	200	147	100	29	387	1066,1	315	447	1213	260	407	118	260	-	409	150	449,6	496	22	560	660	22	550	70	M16×190	18	125	-
200-318	K	B03	22	200	200	200	326 T	200	147	100	29	387	1066,1	315	447	1213	260	407	118	260	-	409	150	449,6	512	22	560	660	22	550	70	M16×190	18	125	-

Baseplates

Table 17: Baseplate dimensions [mm]

Base-plate	Drawing	Baseplate and foundation											Weight	Chemical anchors			Com-ments
		C	D_1	D_2	E	E_1	E_2	E_3	G_1	G_2	H	H_1		Thread	øN	L	
Installation types 3EN, 3EN-H																	
21	21 (0W382341-00)	100	1300	150	1540	1000	-	-	430	550	700	500	64	M16×190	18	125	[8]
22	22 (0W382342-00)	100	1500	150	1740	1200	-	-	530	650	800	600	80	M16×190	18	125	[8]
23	23 (0W382343-00)	100	1700	150	1940	-	700	-	530	650	800	600	92	M16×190	18	125	[8]
24	24 (0W383424-00)	143	1800	150	2040	-	750	-	580	700	940	650	170	M16×190	18	125	[8]
25	25 (0W383425-00)	140	2000	200	2240	-	800	-	780	900	1140	850	265	M16×190	18	125	[8]
26	26 (0W383426-00)	140	2250	200	2490	-	925	-	780	900	1140	850	280	M16×190	18	125	[8]
27	27 (0W384270-00)	160	2150	275	2390	-	800	-	710	820	970	770	240	M20×260	25	170	[8]
28	28 (0W384271-00)	160	2400	300	2640	-	900	-	710	820	970	770	250	M20×260	25	170	[8]
29	29 (0W384272-00)	225	2500	300	2740	-	950	-	910	1050	1200	980	430	M20×260	25	170	[8]
30	30 (0W384273-00/UG1733370)	225	3100	275	3340	-	-	850	900	1050	1200	980	570	M20×260	25	170	[8]
31	31 (0W384274-00)	225	2500	300	2740	-	950	-	1100	1250	1400	1190	435	M20×260	25	170	[8]
32	32 (0W384275-00)	225	3000	300	3240	-	-	800	1100	1250	1400	1190	550	M20×260	25	170	[8]
33	33 (0W384276-00)	290	2500	300	2740	-	950	-	1170	1350	1500	1280	690	M20×260	25	170	[8]
34	34 (0W384277-00/UG1734231)	290	3300	300	3540	-	-	900	1170	1350	1500	1280	865	M20×260	25	170	[8]
35	35 (0W384278-00/UG1741247)	290	3000	300	3240	-	-	800	1170	1350	1500	1280	920	M20×260	25	170	[8]
36	36 (0W384279-00/UG1741154)	290	3300	300	3540	-	-	900	1170	1350	1500	1280	820	M20×260	25	170	[8]
37	37 (0W384450-00)	225	2500	300	2740	-	950	-	820	970	1120	910	420	M20×260	25	170	[8]
38	38 (0W384451-00)	225	3000	300	3240	-	-	800	820	970	1120	910	530	M20×260	25	170	[8]
39	39 (0W385686-00)	140	2500	300	2740	-	950	-	640	750	900	700	270	M20×260	25	170	[8]
40	40 (0W385687-00)	140	2150	275	2390	-	800	-	640	750	900	700	225	M20×260	25	170	[8]
41	41 (0W385945-00)	100	1500	150	1740	-	600	-	580	700	850	650	88	M16×190	18	125	[8]
42	42 (0W385946-00)	100	1800	200	2040	-	700	-	580	700	850	650	105	M16×190	18	125	[8]
43	43 (UG1038248)	140	2650	200	2890	-	-	750	790	900	1140	850	280	M20×260	25	170	[8]
44	44 (UG1038564)	140	2250	200	2490	-	925	-	790	900	1140	850	240	M20×260	25	170	[8]
50	50 (UG1449086)	143	1800	150	2040	-	750	-	580	700	940	650	170	M16×190	18	125	[8]
51	51 (UG1449090)	140	2000	200	2240	-	800	-	780	900	1140	850	265	M16×190	18	125	[8]
52	52 (UG1449100)	140	2250	200	2490	-	925	-	780	900	1140	850	280	M16×190	18	125	[8]
53	53 (UG1572211)	100	1450	150	1540	1150	-	-	430	550	700	500	80	M16×190	18	125	[8]
59	59 (UG1656118)	160	2500	300	2390	-	950	-	710	820	970	770	300	M20×260	25	170	[8]
60	60 (UG1656121)	160	3000	300	3240	-	-	800	710	820	970	770	300	M20×260	25	170	[8]
61	61 (UG1576371)	143	1800	150	2040	-	750	-	580	700	940	650	170	M16×190	18	125	[8]
62	62 (UG1576380)	140	2000	200	2240	-	800	-	780	900	1140	850	265	M16×190	18	125	[8]
63	63 (UG1655822)	225	3100	275	3340	-	-	850	900	1050	1200	980	570	M20×260	25	170	[8]
64	64 (UG1655823)	225	3100	275	3340	-	-	850	900	1050	1200	980	570	M20×260	25	170	[8]
65	65 (UG1709660)	160	2500	300	2640	-	-	950	710	820	970	770	250	M20×260	25	170	[8]
66	66(UG1450974)	140	2000	200	2240		800		790	900	1140	850	265	M16×190	18	125	[8]
67	67(UG1450968)	143	1800	150	2040		750		580	700	940	650	170	M16×190	18	125	[8]
68	68(UG1450977)	140	2250	200	2490		925	-	780	900	1140	850	280	M16×190	18	125	[8]

8 Not including weight of coupling

Foundation rails

Foundation rails are not generally included in KSB's scope of supply.

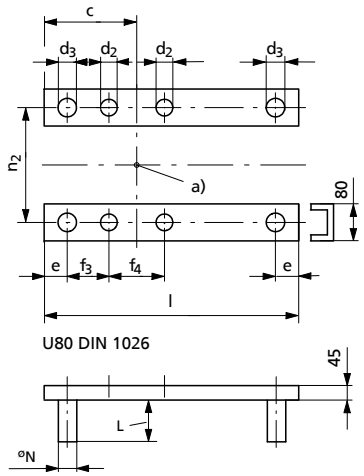

Fig. 12: Foundation rail dimensions

a)	Center of pump
Height = 45 mm	
Chemical anchors: M16×190, ØN = 18 mm, L = 125 mm	

Table 18: Foundation rail dimensions [mm]

Foundation rail	Drawing	Foundation rail								Chemical anchors		
		d_2	d_3	e	f_3	f_4	l	n_2	[kg]	Thread	øN	L
101	101 (UG16188700001)	M12	20	50	65	95	550	250	10	M16×190	18	125
102	102 (UG16188700003)	M12	20	60	55	95	850	250	15	M16×190	18	125
103	103 (UG16188700002)	M16	20	50	90	120	550	315	10	M16×190	18	125
104	104 (UG16188700004)	M16	20	60	80	120	850	315	15	M16×190	18	125
105	105 (UG16188700006)	M16	20	60	80	120	1050	315	19	M16×190	18	125
106.01	106.01 (UG16188700007)	M16	20	60	65	150	1050	400	19	M16×190	18	125
106.02	106.02 (UG16188700007)	M16	20	60	65	150	1050	450	19	M16×190	18	125
107	107.01 (UG16188700008)	M16	20	60	80	120	1050	315	20	M16×190	18	125
108.01	108.01 (UG16188700009)	M16	20	60	65	150	1050	400	20	M16×190	18	125
108.02	108.02 (UG16188700009)	M16	20	60	65	150	1050	450	20	M16×190	18	125
109	109 (UG16188700005)	M16	20	50	115	95	850	250	20	M16×190	18	125

Motor sizes

Table 19: Overview of motor sizes [mm]

Motor size	ød$_1$ (max.)	i$_2$ (max.)	k[9)]	k$_d$[9)]	[kg][9)]
100 L	28,0	60,0	407,0	203,0	30,0
112 M	28,0	60,0	433,0	228,0	37,0
132 S	38,0	80,0	453,0	267,0	64,0
132 M	38,0	80,0	491,0	267,0	64,0
160 M	42,0	110,0	588,0	320,0	84,0
160 L	42,0	110,0	628,0	320,0	107,0
180 M	48,0	110,0	720,0	375,0	157,0
180 L	48,0	110,0	720,0	375,0	175,0
200 L	55,0	110,0	755,0	415,0	257,0
225 S	60,0	140,0	835,0	0,0	300,0
225 M	60,0	140,0	835,0	0,0	330,0
250 M	65,0	140,0	930,0	0,0	435,0
280 S	75,0	140,0	1005,0	0,0	610,0
280 M	75,0	140,0	1005,0	0,0	660,0
315 S	80,0	170,0	1140,0	0,0	830,0
315 M	80,0	170,0	1140,0	0,0	910,0
315 L (k)	80,0	170,0	1280,0	0,0	1200,0
315 L (l)	85,0	170,0	1400,0	0,0	1900,0
355	95,0	170,0	1625,0	0,0	2500,0
400	110,0	210,0	1825,0	0,0	3100,0
182 T	28,6	69,9	358,6	221,0	39,0
184 T	28,6	69,9	383,6	221,0	46,0
213 T	34,9	85,9	454,3	262,0	59,0
215 T	34,9	85,9	482,3	262,0	74,0
254 T	41,3	101,6	566,3	315,0	114,0
256 T	41,3	101,6	612,3	315,0	134,0
284 T	47,6	117,6	731,3	401,0	173,0
286 T	47,6	117,6	731,3	401,0	204,0
324 T	54,0	133,4	812,5	450,0	257,0
326 T	54,0	133,4	812,5	450,0	273,0
364 T	60,3	142,7	869,0	450,0	397,0
365 T	60,3	142,7	869,0	450,0	397,0
404 T	73,0	177,8	1003,0	498,0	470,0
405 T	73,0	177,8	1003,0	498,0	470,0
444 T	85,7	209,6	1158,0	579,0	721,0
445 T	85,7	209,6	1158,0	579,0	721,0
447 T	85,7	209,6	1247,0	607,0	926,0
449 T	85,7	209,6	1396,0	607,0	926,0
504 T	92,1	263,5	1256,0	646,0	1020,0
505 T	92,1	263,5	1256,0	646,0	1020,0
586 T	98,4	288,9	1551,0	735,0	1655,0
587 T	98,4	288,9	1551,0	735,0	1655,0

2580.36/05-EN-US

9 Dimensions for KSB standard motor

Connections

Flange connections

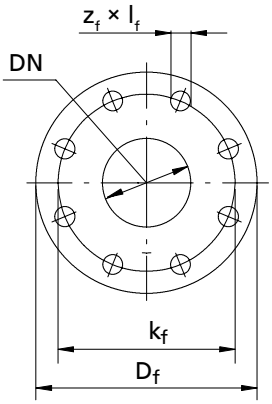

Fig. 13: Flange connection dimensions

Flanges machined to ASME/ANSI B 16.1 Class 125

Pump suction flange drilled to ASME/ANSI B 16.1 Class 125, but with tapped holes (except sizes 500-630 and 500-632).

Table 20: Flange dimensions [mm]

DN	D_f	k_f	l_f	z_f [10)]
50	165	121	19	4
65	185	140	19	4
80	200	152	19	4
100	230	191	19	8
125	254	216	22	8
150	285	241	22	8
200	340	299	22	8
250	406	362	26	12
300	483	432	26	12
350	534	476	28	12
500	700	635	32	20
400	597	540	28	16
600	813	750	35	20
750	985	915	35	28
1050	1347	1257	41	36

10 zf = number of holes

Auxiliary connections

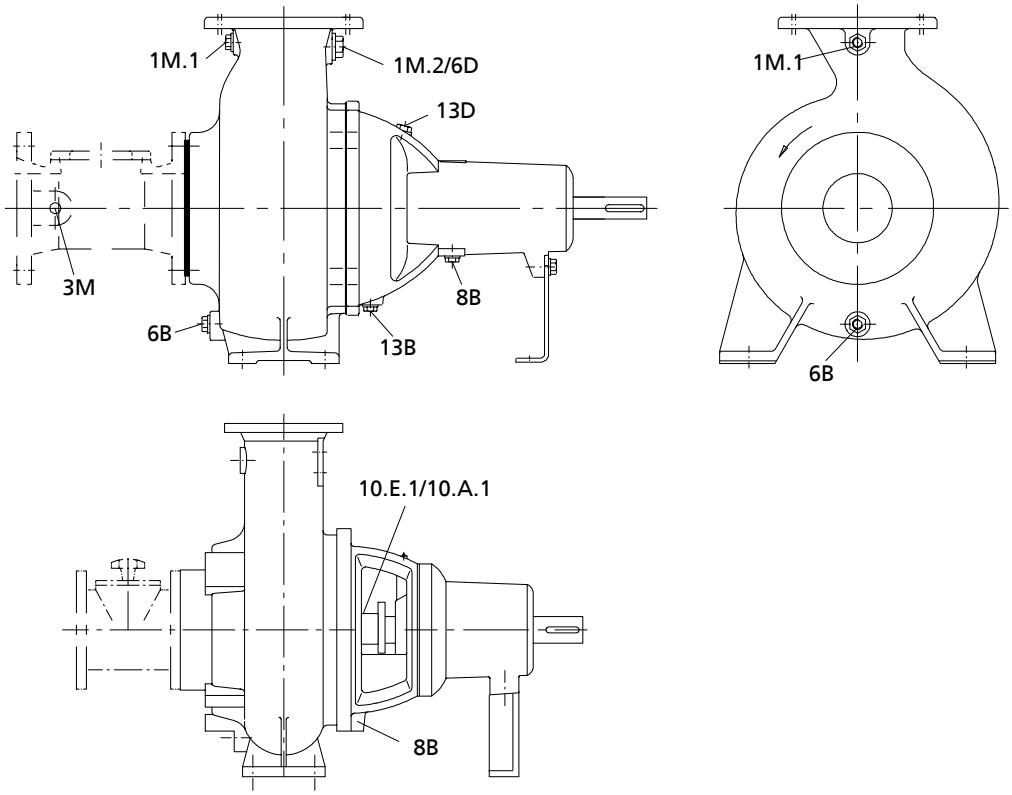

Fig. 14: Overview of auxiliary connections

Table 21: Overview of connections and threads

Size	Connections									
	Pressure gage	Pressure gage	Vent	Pressure/ vacuum gage	Casing drain	Leakage monitor-ing[14)]	Barrier fluid outlet (gland pack-ing)	Barrier fluid inlet (gland pack-ing)	Oil drain	Oil filler opening
	1 M.1	1 M.2 [11)]	6 D	3 M	6 B	8 B	10.A.1[12)]	10.E.1[12)]	13 B[13)]	13 D[13)]
050-215	G 1/2	-	G 1/2	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
050-216	G 1/2	-	G 1/2	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
050-250	G 1/2	-	G 1/2	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
050-251	G 1/2	-	G 1/2	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
065-215	G 1/2	-	G 3/4	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
065-216	G 1/2	-	G 3/4	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
065-217	G 1/2	-	G 3/4	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
065-250	G 1/2	-	G 3/4	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-215	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-216	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-217	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-250	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-252	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-253	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-315	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-316	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
080-317	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
100-215	G 1/2	-	G1	G 1/2	G 1/2	G 3/8	-	-	G3/8	G 1/2
100-250	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
100-251	G 1/2	-	G1	G 1/2	G 1/2	G 3/8	-	-	G3/8	G 1/2

11 Leakage drain for variants with gland packing
12 For vertical installation only
13 Gland packing possible from bearing bracket S05
14 For mechanical seal

2580.36/05-EN-US

Size	Connections									
	Pressure gage	Pressure gage	Vent	Pressure/ vacuum gage	Casing drain	Leakage monitoring[11]	Barrier fluid outlet (gland packing)	Barrier fluid inlet (gland packing)	Oil drain	Oil filler opening
	1 M.1	1 M.2 [12]	6 D	3 M	6 B	8 B	10.A.1[13]	10.E.1[13]	13 B[14]	13 D[14]
100-252	G 1/2	-	G1	G 1/2	G 1/2	G 3/8	-	-	G3/8	G 1/2
100-253 (F)	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
100-254	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
100-255	G 1/2	-	G 1	G 1/2	G 1/2	G 3/8	-	-	G 3/8	G 1/2
100-315	G 1/2	-	G1	G 1/2	G 1/2	G 3/8	-	-	G3/8	G 1/2
100-316	G 1/2	-	G1	G 1/2	G 1/2	G 3/8	-	-	G3/8	G 1/2
100-317	G 1/2	-	G1	G 1/2	G 1/2	G 3/8	-	-	G3/8	G 1/2
100-400 (K)	G 1/2	G 1/2	G 1	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
100-401	G 1/2	G 1/2	G 1	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
100-403	G 1/2	G 1/2	G 1	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
150-251	G 1/2	-	G1	G 1/2	G 1/2	G 3/8	-	-	G3/8	G 1/2
150-253	G 1/2	-	G1	G 1/2	G 1/2	G 3/8	-	-	G3/8	G 1/2
150-315	G 1/2	-	G1	G 1/2	G1	G 3/8	-	-	G3/8	G 1/2
150-317	G 1/2	-	G1	G 1/2	G1	G 3/8	-	-	G3/8	G 1/2
150-400	G 1/2	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
150-400 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
150-401	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
150-403	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
150-503	G 1[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
151-401	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
151-403	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
200-315	G 1/2	-	G1	G 1/2	G1	G 3/8	-	-	G3/8	G 1/2
200-316	G 1/2	-	G1	G 1/2	G1	G 3/8	-	-	G3/8	G 1/2
200-317	G 1/2	-	G 1	G 1/2	G 1	G 3/8	-	-	G 3/8	G 1/2
200-318	G 1/2	-	G1	G 1/2	G1	G 3/8	-	-	G3/8	G 1/2
200-330	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
200-400	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
200-401	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
200-402 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
200-402 (D)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
200-403	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
200-405	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
200-501	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
200-502	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
200-503	G 1[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
200-504	G 1[16]	G 1/2	G 1 1/4	G 1/2	G1	G 1/2	G3/8	G3/8	G 1/2	G 1/2
200-505	G 1[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
200-631 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
250-400	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
250-401	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
250-402	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
250-403	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
250-630	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
250-632	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
250-900 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
300-400	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
300-401	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
300-402	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2

15 For S04: G3/8

16 For horizontal installation only

Size	Connections									
	Pressure gage	Pressure gage	Vent	Pressure/ vacuum gage	Casing drain	Leakage monitor-ing[11]	Barrier fluid outlet (gland pack-ing)	Barrier fluid inlet (gland pack-ing)	Oil drain	Oil filler opening
	1 M.1	1 M.2 [12]	6 D	3 M	6 B	8 B	10.A.1[13]	10.E.1[13]	13 B[14]	13 D[14]
300-403	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2[15]	G 3/8	G 3/8	G 1/2	G 1/2
300-500 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
300-502	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
300-505	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-500	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-501	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-502	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-503	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-503 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-632	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-633	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-710 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
350-713	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
400-500 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
400-632	G 1/2[16]	G 1/2	G 1 1/2	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
400-710 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
400-713	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
400-900 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
500-632 (K)	G 1/2[16]	G 1/2	G 1 1/2	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
500-634	G 1/2[16]	G 1/2	G 1 1/2	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
500-710 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
500-900 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
600-520 (K)	G 1/2[16]	G 1/2	G 2	G 1/2	G 1 1/2	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
600-710 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
600-900 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
700-902 (K)	G 1/2[16]	G 1/2	G 1 1/4	G 1/2	G 1	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2

2580.36/05-EN-US

2024-08-22

2580.36/05-EN-US

KSB SE & Co. KGaA
Turmstraße 92 • 06110 Halle (Germany)
Tel. +49 345 4826-0
www.ksb.com